
prompt*toolkitDocumentation*

Release 3.0.28

Jonathan Slenders

Feb 11, 2022


CONTENTS

1	Getting started	3
2	Thanks to:	5
3	Table of contents	7
3.1	Gallery	7
3.2	Getting started	10
3.3	Upgrading	12
3.4	Printing (and using) formatted text	17
3.5	Asking for input (prompts)	21
3.6	Dialogs	40
3.7	Progress bars	49
3.8	Building full screen applications	53
3.9	Tutorials	59
3.10	Advanced topics	67
3.11	Reference	88
4	Indices and tables	193
	Python Module Index	195
	Index	197

Warning: Notice that this is the prompt_toolkit 3.0 documentation. It is mostly compatible with the 2.0 branch. The difference is that prompt_toolkit 3.0 requires at least Python 3.6. On the plus side, it uses asyncio natively (rather than its own event loop), and we have type annotations everywhere.

prompt_toolkit is a library for building powerful interactive command line and terminal applications in Python.

It can be a very advanced pure Python replacement for [GNU readline](#), but it can also be used for building full screen applications.

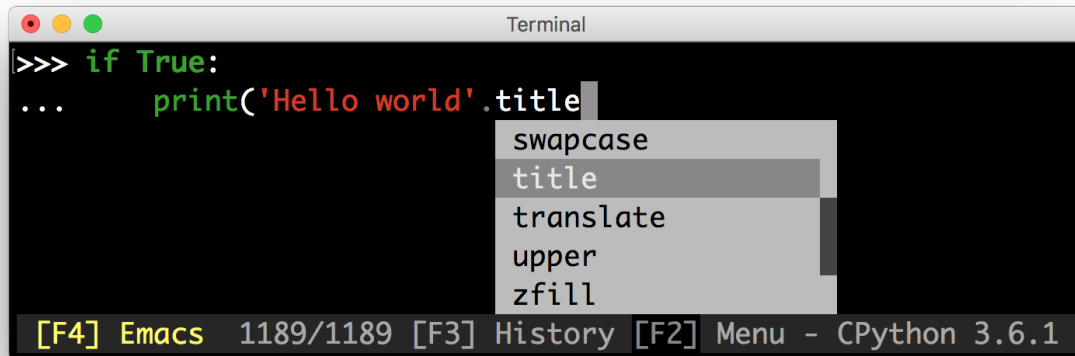

Some features:

- Syntax highlighting of the input while typing. (For instance, with a Pygments lexer.)
- Multi-line input editing.
- Advanced code completion.
- Selecting text for copy/paste. (Both Emacs and Vi style.)
- Mouse support for cursor positioning and scrolling.
- Auto suggestions. (Like [fish shell](#).)
- No global state.

Like readline:

- Both Emacs and Vi key bindings.
- Reverse and forward incremental search.
- Works well with Unicode double width characters. (Chinese input.)

Works everywhere:

- Pure Python. Runs on all Python versions starting at Python 3.6. (Python 2.6 - 3.x is supported in prompt_toolkit 2.0; not 3.0).
- Runs on Linux, OS X, OpenBSD and Windows systems.
- Lightweight, the only dependencies are Pygments and wcwidth.
- No assumptions about I/O are made. Every prompt_toolkit application should also run in a telnet/ssh server or an [asyncio](#) process.

Have a look at [the gallery](#) to get an idea of what is possible.

GETTING STARTED

Go to *getting started* and build your first prompt.

THANKS TO:

A special thanks to [all the contributors](#) for making `prompt_toolkit` possible.
Also, a special thanks to the [Pygments](#) and [wcwidth](#) libraries.


TABLE OF CONTENTS

3.1 Gallery

Showcase, demonstrating the possibilities of prompt_toolkit.


3.1.1 Ptpython, a Python REPL

The prompt:

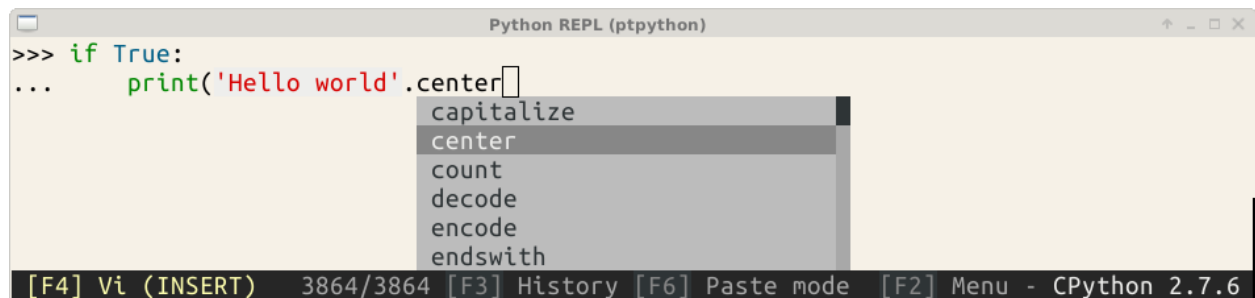

The screenshot shows a terminal window titled "Python REPL (ptpython)". The prompt is `>>> if True:` followed by `... print('Hello world'.center`. A completion menu is displayed, listing `capitalize`, `center`, `count`, `decode`, `encode`, and `endswith`. The status bar at the bottom shows `[F4] Vi (INSERT) 3864/3864 [F3] History [F6] Paste mode [F2] Menu - CPython 2.7.6`.

The configuration menu of ptpython.

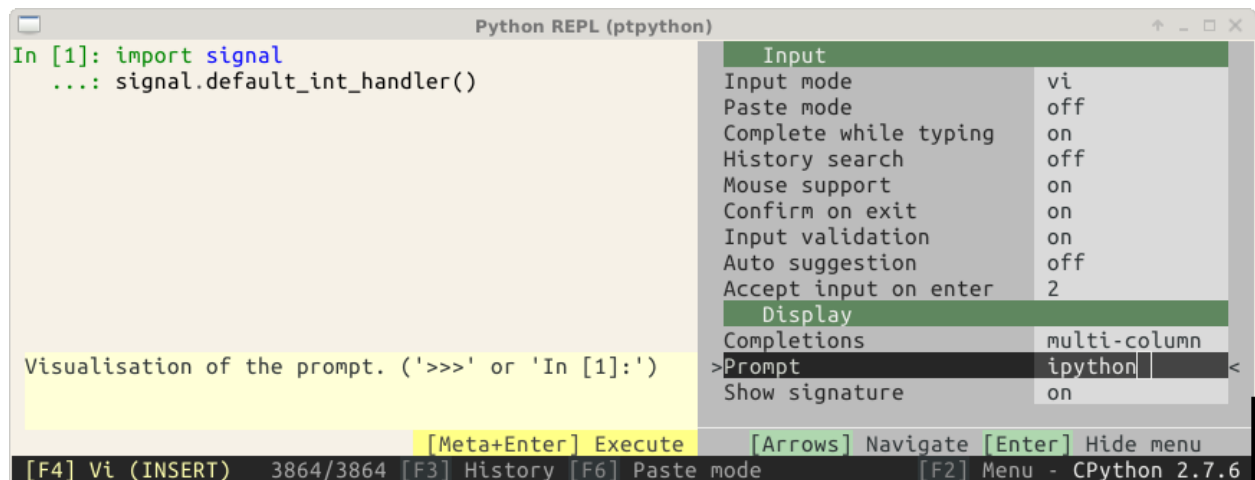

The screenshot shows the same terminal window with the configuration menu open. The menu is divided into two sections: "Input" and "Display". The "Input" section includes options like "Input mode" (vi), "Paste mode" (off), "Complete while typing" (on), "History search" (off), "Mouse support" (on), "Confirm on exit" (on), "Input validation" (on), "Auto suggestion" (off), and "Accept input on enter" (2). The "Display" section includes "Completions" (multi-column), "Prompt" (ipython), and "Show signature" (on). The status bar at the bottom shows `[F4] Vi (INSERT) 3864/3864 [F3] History [F6] Paste mode [F2] Menu - CPython 2.7.6`.

The history page with its help. (This is a full-screen layout.)

The screenshot shows a window titled "History browser - Insert from history". On the left, there is a list of code snippets from a Python history. On the right, a "History Help" window is open, providing instructions on how to use the interface.

History browser - Insert from history

```
* jinja2.Template('', autoescape=True)
* t = jinja2.Template('<p>{{ a }}</p>', autoe
* t.render(a='<p>')
* ('a', 'b') +
* ('a', 'b') +
* if True:
    print('te
* if True:
    print('te
* 324324
* 32432
* 324324
* 23324
* enumerate(ran
* import dateti
* datetime.date
* n=_
* n.isoformat()
* '%s' % None
* from collecti
* defaultdict(l
* a=_
* a[4][5]
* import signal
* signal.defaul
* signal.signal
* assert False
* 234324
```

History Help

This interface is meant to select multiple lines from the history and execute them together.

Typical usage

1. Move the ``cursor up`` in the history pane, until the cursor is on the first desired line.
2. Hold down the ``space bar``, or press it multiple times. Each time it will select one line and move to the next one. Each selected line will appear on the right side.
3. When all the required lines are displayed on the right side, press ``Enter``. This will go back to the Python REPL and show these lines as the current input. They can still be edited from there.

Key bindings

[F4] Vi (NAV) [Space] Toggle [Tab] Focus [Enter] Accept [F1] Help

3.1.2 Pyvim, a Vim clone

```

editor.py  reporting.py
5
6     files_to_edit = ['file1.txt', 'file2.py']
7     e = Editor(files_to_edit)
8     e.run() # Runs the event loop, starts interaction.
9 """
10 from __future__ import unicode_literals
11
12 from prompt_toolkit.buffer import Buffer, AcceptAction
13 from prompt_toolkit.contrib.shortcuts import create_eventloop
14 from prompt_toolkit.enums import SEARCH_BUFFER
15 from prompt_toolkit.filters import Always, Condition
16 from prompt_toolkit.history import FileHistory
17 from prompt_toolkit.interface import CommandLineInterface, AbortAction
18 from prompt_toolkit.key_binding.vi_state import InputMode
19
20 from .commands.completer import create_command_completer
21 from .commands.handler import handle_command
22 from .commands.preview import CommandPreviewer
23 from .editor_buffer import EditorBuffer
24 from .enums import COMMAND_BUFFER
25 from .help import HELP_TEXT
26 from .key_bindings import create_key_bindings
27 from .layout import EditorLayout
28 from .reporting import report
29 from .style import generate_built_in_styles, get_editor_style_by_name
30 from .window_arrangement import WindowArrangement
31
32 import pygments
33 import os
34
35 __all__ = (
36     'Editor',
37 )
38
39
40 class Editor(object):
41     """
42     The main class. Containing the whole editor.
43 """
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
260
```

3.1.3 Pymux, a terminal multiplexer (like tmux) in Python

```

~/git/pymux
1  [ |          3.9%]    Tasks: 130; 1 running
2  [ |          2.0%]    Load average: 0.05 0.08 0.09
Mem[|||||||553/3029MB]  Uptime: 17:14:01
Swp[          0/4092MB]

PID USER      PRI  NI  VIRT   RES   SHR  S  CPU%  MEM%   TIME+
23776 jonathan   20    0 69528 20980 2204  S   2.0   0.7   0:06.77
1051  root       20    0 127M  54220 14752  S   1.3   1.7   3:22.25
24012 jonathan   20    0 203M 13800  9552  S   0.7   0.4   0:00.05
23915 jonathan   20    0 5504  1764  1312  R   0.7   0.1   0:01.05
2511  jonathan   20    0 209M 21548 11216  S   0.7   0.7   2:48.03
23627 jonathan   20    0 259M 58284 23232  S   0.0   1.9   0:03.22
2121  jonathan   20    0 126M 10616  7808  S   0.0   0.3   0:02.22
2211  jonathan   20    0 178M 15292 10924  S   0.0   0.5   0:05.87
F1Help F2Setup F3Search F4Filter F5Tree F6SortBy F7Nice F8Nice

~/git/pymux
jonathan@jonathan-VirtualBox ~/git/pymux
$ ls
examples          pymux          README.rst
LICENSE           pymux.egg-info setup.py
prompt-toolkit-render-input.log README.2.rst  TODO

jonathan@jonathan-VirtualBox ~/git/pymux
$ ^C

jonathan@jonathan-VirtualBox ~/git/pymux
$

commands/commands.py - Pyvim
utils.py | commands.py
264 @cmd('swap-pane', options='(-D|-U)')
265 def swap-pane(pymux, cli, variables):
266     pymux.arrangement.get_active_window(cli).rotate(wit
267
268
269 @cmd('kill-pane')
270 def kill-pane(pymux, cli, variables):
271     pane = pymux.arrangement.get_active_pane(cli)
272     pymux.kill_pane(pane)
273
274
275 @cmd('kill-window')
276 def kill_window(pymux, cli, variables):
277     " Kill all panes in the current window. "
278     for pane in pymux.arrangement.get_active_window(cli
279         pymux.kill_pane(pane)
280
281
282 @cmd('suspend-client')
283 def suspend_client(pymux, cli, variables):
284     connection = pymux.get_connection_for_cli(cli)
285
286     if connection:
287         connection.suspend_client_to_background()
288
289
290 @cmd('clock-mode')
291 def clock_mode(pymux, cli, variables):
292     pane = pymux.arrangement.get_active_pane(cli)
293     if pane:
294
commands/commands.py (290,7) - 42%
00:39 03-Jan-16

```

3.2 Getting started

3.2.1 Installation

```
pip install prompt_toolkit
```

For Conda, do:

```
conda install -c https://conda.anaconda.org/conda-forge prompt_toolkit
```

3.2.2 Several use cases: prompts versus full screen terminal applications

prompt_toolkit was in the first place meant to be a replacement for readline. However, when it became more mature, we realised that all the components for full screen applications are there and *prompt_toolkit* is very capable of handling many use situations. *Pyvim* and *pymux* are examples of full screen applications.

```

editor.py reporting.py
5
6 files_to_edit = ['file1.txt', 'file2.py']
7 e = Editor(files_to_edit)
8 e.run() # Runs the event loop, starts interaction.
9 """
10 from __future__ import unicode_literals
11
12 from prompt_toolkit.buffer import Buffer, AcceptAction
13 from prompt_toolkit.contrib.shortcuts import create_eventloop
14 from prompt_toolkit.enums import SEARCH_BUFFER
15 from prompt_toolkit.filters import Always, Condition
16 from prompt_toolkit.history import FileHistory
17 from prompt_toolkit.interface import CommandLineInterface, AbortAction
18 from prompt_toolkit.key_binding.vi_state import InputMode
19
20 from .commands.completer import create_command_completer
21 from .commands.handler import handle_command
22 from .commands.preview import CommandPreviewer
23 from .editor_buffer import EditorBuffer
24 from .enums import COMMAND_BUFFER
25 from .help import HELP_TEXT
26 from .key_bindings import create_key_bindings
27 from .layout import EditorLayout
28 from .reporting import report
29 from .style import generate_built_in_styles, get_editor_style_by_name
30 from .window_arrangement import WindowArrangement
31
32 import pygments
33 import os
34
35 __all__ = (
36     'Editor',
37 )
38
39 class Editor(object):
40     """
41     The main class. Containing the whole editor.
42     """
43
44     .layout.py.swp .init .py .init .pyc commands/ completion.py completion.pyc editor.py editor.pyc editor_buffer.py editor_buffer.pyc >
45 editor.py (22,1) - 1% window_arrangement.py (11,1) - 2%
46 :edit completion.py
532 return tokens, lambda i: i
533
534
535 class ShowTabsProcessor(Processor):
536     """
537     Render tabs as spaces or make them visible.
538
539     def __init__(self, editor):
540         self.editor = editor
541
542     def run(self, cli, document, tokens):
543         tabstop = self.editor.tabstop
544
545         # Create separator for tabs.
546         dots = '\u2508'
547         separator = dots * tabstop
548
549         # Remember the positions where we replace the tab.
550         positions = set()
551
552         # Replace tab by separator.
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

```

Basically, at the core, *prompt_toolkit* has a layout engine, that supports horizontal and vertical splits as well as floats, where each “window” can display a user control. The API for user controls is simple yet powerful.

When *prompt_toolkit* is used as a readline replacement, (to simply read some input from the user), it uses a rather simple built-in layout. One that displays the default input buffer and the prompt, a float for the autocompletions and a toolbar for input validation which is hidden by default.

For full screen applications, usually we build a custom layout ourselves.

Further, there is a very flexible key binding system that can be programmed for all the needs of full screen applications.

3.2.3 A simple prompt

The following snippet is the most simple example, it uses the `prompt()` function to asks the user for input and returns the text. Just like `(raw_)input`.

```

from prompt_toolkit import prompt

text = prompt('Give me some input: ')
print('You said: %s' % text)

```

3.2.4 Learning *prompt_toolkit*

In order to learn and understand *prompt_toolkit*, it is best to go through the all sections in the order below. Also don't forget to have a look at all the [examples](#) in the repository.

- First, [learn how to print text](#). This is important, because it covers how to use “formatted text”, which is something you'll use whenever you want to use colors anywhere.
- Secondly, go through the [asking for input](#) section. This is useful for almost any use case, even for full screen applications. It covers autocompletions, syntax highlighting, key bindings, and so on.
- Then, learn about [Dialogs](#), which is easy and fun.
- Finally, learn about [full screen applications](#) and read through [the advanced topics](#).

3.3 Upgrading

3.3.1 Upgrading to *prompt_toolkit* 2.0

prompt_toolkit 2.0 is not compatible with 1.0, however you probably want to upgrade your applications. This page explains why we have these differences and how to upgrade.

If you experience some difficulties or you feel that some information is missing from this page, don't hesitate to open a GitHub issue for help.

Why all these breaking changes?

After more and more custom *prompt_toolkit* applications were developed, it became clear that *prompt_toolkit* 1.0 was not flexible enough for certain use cases. Mostly, the development of full screen applications was not really natural. All the important components, like the rendering, key bindings, input and output handling were present, but the API was in the first place designed for simple command line prompts. This was mostly notably in the following two places:

- First, there was the focus which was always pointing to a [Buffer](#) (or text input widget), but in full screen applications there are other widgets, like menus and buttons which can be focused.
- And secondly, it was impossible to make reusable UI components. All the key bindings for the entire applications were stored together in one `KeyBindings` object, and similar, all [Buffer](#) objects were stored together in one dictionary. This didn't work well. You want reusable components to define their own key bindings and everything. It's the idea of encapsulation.

For simple prompts, the changes wouldn't be that invasive, but given that there would be some, I took the opportunity to fix a couple of other things. For instance:

- In *prompt_toolkit* 1.0, we translated `\r` into `\n` during the input processing. This was not a good idea, because some people wanted to handle these keys individually. This makes sense if you keep in mind that they correspond to *Control-M* and *Control-J*. However, we couldn't fix this without breaking everyone's enter key, which happens to be the most important key in prompts.

Given that we were going to break compatibility anyway, we changed a couple of other important things that effect both simple prompt applications and full screen applications. These are the most important:

- We no longer depend on Pygments for styling. While we like Pygments, it was not flexible enough to provide all the styling options that we need, and the Pygments tokens were not ideal for styling anything besides tokenized text.

Instead we created something similar to CSS. All UI components can attach classnames to themselves, as well as define an inline style. The final style is then computed by combining the inline styles, the classnames and the style sheet.

There are still adaptors available for using Pygments lexers as well as for Pygments styles.

- The way that key bindings were defined was too complex. `KeyBindingsManager` was too complex and no longer exists. Every set of key bindings is now a `KeyBindings` object and multiple of these can be merged together at any time. The runtime performance remains the same, but it's now easier for users.
- The separation between the `CommandLineInterface` and `Application` class was confusing and in the end, didn't really had an advantage. These two are now merged together in one `Application` class.
- We no longer pass around the active `CommandLineInterface`. This was one of the most annoying things. Key bindings need it in order to change anything and filters need it in order to evaluate their state. It was pretty annoying, especially because there was usually only one application active at a time. So, `Application` became a `TaskLocal`. That is like a global variable, but scoped in the current coroutine or context. The way this works is still not 100% correct, but good enough for the projects that need it (like Pymux), and hopefully Python will get support for this in the future thanks to PEP521, PEP550 or PEP555.

All of these changes have been tested for many months, and I can say with confidence that `prompt_toolkit 2.0` is a better `prompt_toolkit`.

Some new features

Apart from the breaking changes above, there are also some exciting new features.

- We now support vt100 escape codes for Windows consoles on Windows 10. This means much faster rendering, and full color support.
- We have a concept of formatted text. This is an object that evaluates to styled text. Every input that expects some text, like the message in a prompt, or the text in a toolbar, can take any kind of formatted text as input. This means you can pass in a plain string, but also a list of *(style, text)* tuples (similar to a Pygments tokenized string), or an `HTML` object. This simplifies many APIs.
- New utilities were added. We now have function for printing formatted text and an experimental module for displaying progress bars.
- Autocompletion, input validation, and auto suggestion can now either be asynchronous or synchronous. By default they are synchronous, but by wrapping them in `ThreadedCompleter`, `ThreadedValidator` or `ThreadedAutoSuggest`, they will become asynchronous by running in a background thread.

Further, if the autocompletion code runs in a background thread, we will show the completions as soon as they arrive. This means that the autocompletion algorithm could for instance first yield the most trivial completions and then take time to produce the completions that take more time.

Upgrading

More guidelines on how to upgrade will follow.

AbortAction has been removed

Prompt_toolkit 1.0 had an argument `abort_action` for both the `Application` class as well as for the `prompt` function. This has been removed. The recommended way to handle this now is by capturing `KeyboardInterrupt` and `EOFError` manually.

Calling `create_eventloop` usually not required anymore

Prompt_toolkit 2.0 will automatically create the appropriate event loop when it's needed for the first time. There is no need to create one and pass it around. If you want to run an application on top of `asyncio` (without using an executor), it still needs to be activated by calling `use_asyncio_event_loop()` at the beginning.

Pygments styles and tokens

prompt_toolkit 2.0 no longer depends on `Pygments`, but that definitely doesn't mean that you can't use any `Pygments` functionality anymore. The only difference is that `Pygments` stuff needs to be wrapped in an adaptor to make it compatible with the native `prompt_toolkit` objects.

- For instance, if you have a list of `(pygments.Token, text)` tuples for formatting, then this needs to be wrapped in a `PygmentsTokens` object. This is an adaptor that turns it into `prompt_toolkit` "formatted text". Feel free to keep using this.
- `Pygments` lexers need to be wrapped in a `PygmentsLexer`. This will convert the list of `Pygments` tokens into `prompt_toolkit` formatted text.
- If you have a `Pygments` style, then this needs to be converted as well. A `Pygments` style class can be converted in a `prompt_toolkit Style` with the `style_from_pygments_cls()` function (which used to be called `style_from_pygments`). A `Pygments` style dictionary can be converted using `style_from_pygments_dict()`.

Multiple styles can be merged together using `merge_styles()`.

WordCompleter

`WordCompleter` was moved from `prompt_toolkit.contrib.completers.base.WordCompleter` to `prompt_toolkit.completion.word_completer.WordCompleter`.

Asynchronous autocompletion

By default, `prompt_toolkit 2.0` completion is now synchronous. If you still want asynchronous auto completion (which is often good thing), then you have to wrap the completer in a `ThreadedCompleter`.

Filters

We don't distinguish anymore between *CLIFilter* and *SimpleFilter*, because the application object is no longer passed around. This means that all filters are a *Filter* from now on.

All filters have been turned into functions. For instance, *IsDone* became *is_done* and *HasCompletions* became *has_completions*.

This was done because almost all classes were called without any arguments in the `__init__` causing additional braces everywhere. This means that *HasCompletions()* has to be replaced by *has_completions* (without parenthesis).

The few filters that took arguments as input, became functions, but still have to be called with the given arguments.

For new filters, it is recommended to use the `@Condition` decorator, rather than inheriting from *Filter*. For instance:

```
from prompt_toolkit.filters import Condition

@Condition
def my_filter():
    return True # Or False
```

3.3.2 Upgrading to prompt_toolkit 3.0

There are two major changes in 3.0 to be aware of:

- First, `prompt_toolkit` uses the `asyncio` event loop natively, rather than using its own implementations of event loops. This means that all coroutines are now `asyncio` coroutines, and all `Futures` are `asyncio` futures. Asynchronous generators became real asynchronous generators as well.
- `Prompt_toolkit` uses type annotations (almost) everywhere. This should not break any code, but it's very helpful in many ways.

There are some minor breaking changes:

- The `dialogs` API had to change (see below).

Detecting the `prompt_toolkit` version

Detecting whether version 3 is being used can be done as follows:

```
from prompt_toolkit import __version__ as ptk_version

PTK3 = ptk_version.startswith('3.')
```

Fixing calls to `get_event_loop`

Every usage of `get_event_loop` has to be fixed. An easy way to do this is by changing the imports like this:

```
if PTK3:
    from asyncio import get_event_loop
else:
    from prompt_toolkit.eventloop import get_event_loop
```

Notice that for prompt_toolkit 2.0, `get_event_loop` returns a prompt_toolkit EventLoop object. This is not an asyncio eventloop, but the API is similar.

There are some changes to the eventloop API:

version 2.0	version 3.0 (asyncio)
<code>loop.run_in_executor(callback)</code>	<code>loop.run_in_executor(None, callback)</code>
<code>loop.call_from_executor(callback)</code>	<code>loop.call_soon_threadsafe(callback)</code>

Running on top of asyncio

For 2.0, you had tell prompt_toolkit to run on top of the asyncio event loop. Now it's the default. So, you can simply remove the following two lines:

```
from prompt_toolkit.eventloop.defaults import use_asyncio_event_loop
use_asyncio_event_loop()
```

There is a few little breaking changes though. The following:

```
# For 2.0
result = await PromptSession().prompt('Say something: ', async_=True)
```

has to be changed into:

```
# For 3.0
result = await PromptSession().prompt_async('Say something: ')
```

Further, it's impossible to call the `prompt()` function within an asyncio application (within a coroutine), because it will try to run the event loop again. In that case, always use `prompt_async()`.

Changes to the dialog functions

The original way of using dialog boxes looked like this:

```
from prompt_toolkit.shortcuts import input_dialog

result = input_dialog(title='...', text='...')
```

Now, the dialog functions return a prompt_toolkit Application object. You have to call either its `run` or `run_async` method to display the dialog. The `async_` parameter has been removed everywhere.

```
if PTK3:
    result = input_dialog(title='...', text='...').run()
else:
    result = input_dialog(title='...', text='...')

# Or

if PTK3:
    result = await input_dialog(title='...', text='...').run_async()
else:
    result = await input_dialog(title='...', text='...', async_=True)
```

3.4 Printing (and using) formatted text

Prompt_toolkit ships with a `print_formatted_text()` function that's meant to be (as much as possible) compatible with the built-in `print` function, but on top of that, also supports colors and formatting.

On Linux systems, this will output VT100 escape sequences, while on Windows it will use Win32 API calls or VT100 sequences, depending on what is available.

Note: This page is also useful if you'd like to learn how to use formatting in other places, like in a prompt or a toolbar. Just like `print_formatted_text()` takes any kind of “formatted text” as input, prompts and toolbars also accept “formatted text”.

3.4.1 Printing plain text

The `print` function can be imported as follows:

```
from prompt_toolkit import print_formatted_text

print_formatted_text('Hello world')
```

You can replace the built in `print` function as follows, if you want to.

```
from prompt_toolkit import print_formatted_text as print

print('Hello world')
```

Note: If you're using Python 2, make sure to add `from __future__ import print_function`. Otherwise, it will not be possible to import a function named `print`.

3.4.2 Formatted text

There are several ways to display colors:

- By creating an `HTML` object.
- By creating an `ANSI` object that contains ANSI escape sequences.
- By creating a list of `(style, text)` tuples.
- By creating a list of `(pygments.Token, text)` tuples, and wrapping it in `PygmentsTokens`.

An instance of any of these four kinds of objects is called “formatted text”. There are various places in prompt toolkit, where we accept not just plain text (as a string), but also formatted text.

HTML

HTML can be used to indicate that a string contains HTML-like formatting. It recognizes the basic tags for bold, italic and underline: `<b>`, `<i>` and `<u>`.

```
from prompt_toolkit import print_formatted_text, HTML

print_formatted_text(HTML('<b>This is bold</b>'))
print_formatted_text(HTML('<i>This is italic</i>'))
print_formatted_text(HTML('<u>This is underlined</u>'))
```

Further, it's possible to use tags for foreground colors:

```
# Colors from the ANSI palette.
print_formatted_text(HTML('<ansired>This is red</ansired>'))
print_formatted_text(HTML('<ansigreen>This is green</ansigreen>'))

# Named colors (256 color palette, or true color, depending on the output).
print_formatted_text(HTML('<skyblue>This is sky blue</skyblue>'))
print_formatted_text(HTML('<seagreen>This is sea green</seagreen>'))
print_formatted_text(HTML('<violet>This is violet</violet>'))
```

Both foreground and background colors can also be specified setting the *fg* and *bg* attributes of any HTML tag:

```
# Colors from the ANSI palette.
print_formatted_text(HTML('<aaa fg="ansiwhite" bg="ansigreen">White on green</aaa>'))
```

Underneath, all HTML tags are mapped to classes from a stylesheet, so you can assign a style for a custom tag.

```
from prompt_toolkit import print_formatted_text, HTML
from prompt_toolkit.styles import Style

style = Style.from_dict({
    'aaa': '#ff0066',
    'bbb': '#44ff00 italic',
})

print_formatted_text(HTML('<aaa>Hello</aaa> <bbb>world</bbb>!'), style=style)
```

ANSI

Some people like to use the VT100 ANSI escape sequences to generate output. Natively, this is however only supported on VT100 terminals, but `prompt_toolkit` can parse these, and map them to formatted text instances. This means that they will work on Windows as well. The *ANSI* class takes care of that.

```
from prompt_toolkit import print_formatted_text, ANSI

print_formatted_text(ANSI('\x1b[31mhello \x1b[32mworld'))
```

Keep in mind that even on a Linux VT100 terminal, the final output produced by `prompt_toolkit`, is not necessarily exactly the same. Depending on the color depth, it is possible that colors are mapped to different colors, and unknown tags will be removed.

(style, text) tuples

Internally, both *HTML* and *ANSI* objects are mapped to a list of (style, text) tuples. It is however also possible to create such a list manually with *FormattedText* class. This is a little more verbose, but it's probably the most powerful way of expressing formatted text.

```
from prompt_toolkit import print_formatted_text
from prompt_toolkit.formatted_text import FormattedText

text = FormattedText([
    ('#ff0066', 'Hello'),
    ('', ' '),
    ('#44ff00 italic', 'World'),
])

print_formatted_text(text)
```

Similar to the *HTML* example, it is also possible to use class names, and separate the styling in a style sheet.

```
from prompt_toolkit import print_formatted_text
from prompt_toolkit.formatted_text import FormattedText
from prompt_toolkit.styles import Style

# The text.
text = FormattedText([
    ('class:aaa', 'Hello'),
    ('', ' '),
    ('class:bbb', 'World'),
])

# The style sheet.
style = Style.from_dict({
    'aaa': '#ff0066',
    'bbb': '#44ff00 italic',
})

print_formatted_text(text, style=style)
```

Pygments (Token, text) tuples

When you have a list of *Pygments* (Token, text) tuples, then these can be printed by wrapping them in a *PygmentsTokens* object.

```
from pygments.token import Token
from prompt_toolkit import print_formatted_text
from prompt_toolkit.formatted_text import PygmentsTokens

text = [
    (Token.Keyword, 'print'),
    (Token.Punctuation, '('),
    (Token.Literal.String.Double, ''),
    (Token.Literal.String.Double, 'hello'),
    (Token.Literal.String.Double, ''),

```

(continues on next page)

(continued from previous page)

```

    (Token.Punctuation, ')'),
    (Token.Text, '\n'),
]

print_formatted_text(PygmentsTokens(text))

```

Similarly, it is also possible to print the output of a Pygments lexer:

```

import pygments
from pygments.token import Token
from pygments.lexers.python import PythonLexer

from prompt_toolkit.formatted_text import PygmentsTokens
from prompt_toolkit import print_formatted_text

# Printing the output of a pygments lexer.
tokens = list(pygments.lex('print("Hello")', lexer=PythonLexer()))
print_formatted_text(PygmentsTokens(tokens))

```

Prompt_toolkit ships with a default colorscheme which styles it just like Pygments would do, but if you'd like to change the colors, keep in mind that Pygments tokens map to classnames like this:

pygments.Token	prompt_toolkit classname
- Token.Keyword - Token.Punctuation - Token.Literal.String.Double - Token.Text - Token	"class:pygments.keyword" "class:pygments.punctuation" "class:pygments.literal.string.double" "class:pygments.text" "class:pygments"

A classname like `pygments.literal.string.double` is actually decomposed in the following four classnames: `pygments`, `pygments.literal`, `pygments.literal.string` and `pygments.literal.string.double`. The final style is computed by combining the style for these four classnames. So, changing the style from these Pygments tokens can be done as follows:

```

from prompt_toolkit.styles import Style

style = Style.from_dict({
    'pygments.keyword': 'underline',
    'pygments.literal.string': 'bg:#00ff00 #ffffff',
})

print_formatted_text(PygmentsTokens(tokens), style=style)

```

to_formatted_text

A useful function to know about is `to_formatted_text()`. This ensures that the given input is valid formatted text. While doing so, an additional style can be applied as well.

```
from prompt_toolkit.formatted_text import to_formatted_text, HTML
from prompt_toolkit import print_formatted_text

html = HTML('<aaa>Hello</aaa> <bbb>world</bbb>!')
text = to_formatted_text(html, style='class:my_html bg:#00ff00 italic')

print_formatted_text(text)
```

3.5 Asking for input (prompts)

This page is about building prompts. Pieces of code that we can embed in a program for asking the user for input. Even if you want to use *prompt_toolkit* for building full screen terminal applications, it is probably still a good idea to read this first, before heading to the *building full screen applications* page.


In this page, we will cover autocompletion, syntax highlighting, key bindings, and so on.

3.5.1 Hello world

The following snippet is the most simple example, it uses the `prompt()` function to ask the user for input and returns the text. Just like `(raw_)input`.

```
from prompt_toolkit import prompt

text = prompt('Give me some input: ')
print('You said: %s' % text)
```

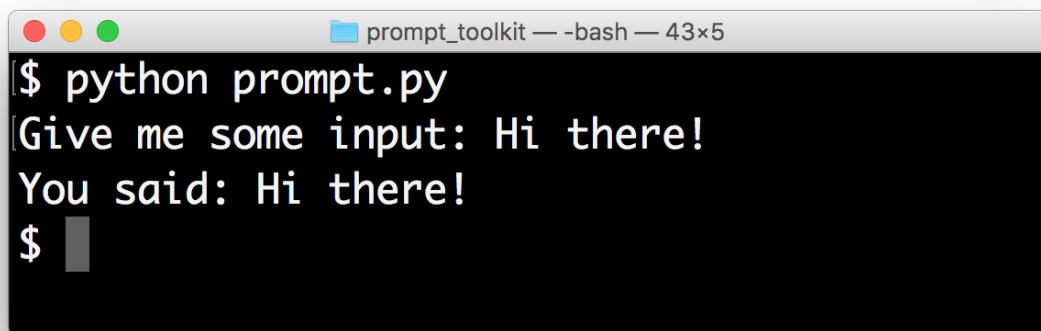

What we get here is a simple prompt that supports the Emacs key bindings like `readline`, but further nothing special. However, `prompt()` has a lot of configuration options. In the following sections, we will discover all these parameters.

3.5.2 The *PromptSession* object

Instead of calling the `prompt()` function, it's also possible to create a *PromptSession* instance followed by calling its `prompt()` method for every input call. This creates a kind of an input session.

```
from prompt_toolkit import PromptSession

# Create prompt object.
session = PromptSession()

# Do multiple input calls.
text1 = session.prompt()
text2 = session.prompt()
```

This has mainly two advantages:


- The input history will be kept between consecutive `prompt()` calls.
- The *PromptSession()* instance and its `prompt()` method take about the same arguments, like all the options described below (highlighting, completion, etc...). So if you want to ask for multiple inputs, but each input call needs about the same arguments, they can be passed to the *PromptSession()* instance as well, and they can be overridden by passing values to the `prompt()` method.

3.5.3 Syntax highlighting

Adding syntax highlighting is as simple as adding a lexer. All of the *Pygments* lexers can be used after wrapping them in a *PygmentsLexer*. It is also possible to create a custom lexer by implementing the *Lexer* abstract base class.

```
from pygments.lexers.html import HtmlLexer
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.lexers import PygmentsLexer

text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer))
print('You said: %s' % text)
```

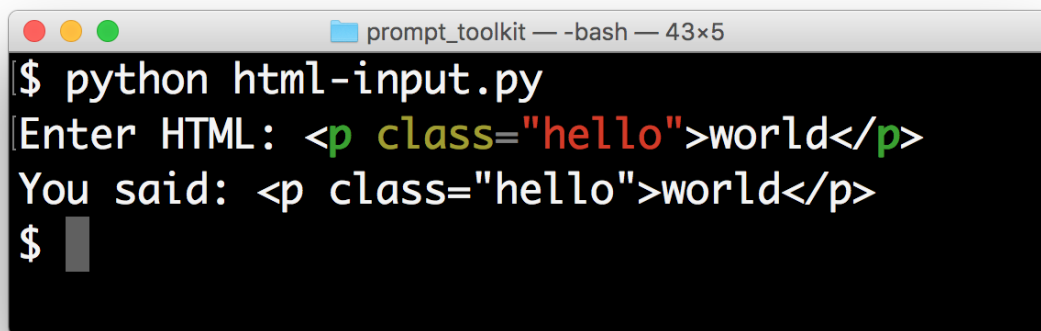

The default *Pygments* colorscheme is included as part of the default style in *prompt_toolkit*. If you want to use another *Pygments* style along with the lexer, you can do the following:

```

from pygments.lexers.html import HtmlLexer
from pygments.styles import get_style_by_name
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.lexers import PygmentsLexer
from prompt_toolkit.styles.pygments import style_from_pygments_cls

style = style_from_pygments_cls(get_style_by_name('monokai'))
text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer), style=style,
              include_default_pygments_style=False)
print('You said: %s' % text)

```

We pass `include_default_pygments_style=False`, because otherwise, both styles will be merged, possibly giving slightly different colors in the outcome for cases where our custom Pygments style doesn't specify a color.

3.5.4 Colors

The colors for syntax highlighting are defined by a `Style` instance. By default, a neutral built-in style is used, but any style instance can be passed to the `prompt()` function. A simple way to create a style, is by using the `from_dict()` function:

```

from pygments.lexers.html import HtmlLexer
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.styles import Style
from prompt_toolkit.lexers import PygmentsLexer

our_style = Style.from_dict({
    'pygments.comment':  '#888888 bold',
    'pygments.keyword':  '#ff88ff bold',
})

text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer),
              style=our_style)

```

The style dictionary is very similar to the Pygments styles dictionary, with a few differences:

- The *roman*, *sans*, *mono* and *border* options are ignored.
- The style has a few additions: `blink`, `noblink`, `reverse` and `noreverse`.
- Colors can be in the `#ff0000` format, but they can be one of the built-in ANSI color names as well. In that case, they map directly to the 16 color palette of the terminal.

Read more about styling.

Using a Pygments style

All Pygments style classes can be used as well, when they are wrapped through `style_from_pygments_cls()`.

Suppose we'd like to use a Pygments style, for instance `pygments.styles.tango.TangoStyle`, that is possible like this:

Creating a custom style could be done like this:

```
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.styles import Style, style_from_pygments_cls, merge_styles
from prompt_toolkit.lexers import PygmentsLexer

from pygments.styles.tango import TangoStyle
from pygments.lexers.html import HtmlLexer

our_style = merge_styles([
    style_from_pygments_cls(TangoStyle),
    Style.from_dict({
        'pygments.comment': '#888888 bold',
        'pygments.keyword': '#ff88ff bold',
    })
])

text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer),
              style=our_style)
```

Coloring the prompt itself

It is possible to add some colors to the prompt itself. For this, we need to build some *formatted text*. One way of doing this is by creating a list of style/text tuples. In the following example, we use class names to refer to the style.


```
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.styles import Style

style = Style.from_dict({
    # User input (default text).
    '': '#ff0066',

    # Prompt.
    'username': '#884444',
    'at': '#00aa00',
    'colon': '#0000aa',
    'pound': '#00aa00',
    'host': '#00ffff bg:#444400',
    'path': 'ansicyan underline',
})

message = [
    ('class:username', 'john'),
    ('class:at', '@'),
    ('class:host', 'localhost'),
    ('class:colon', ':'),
    ('class:path', '/user/john'),
    ('class:pound', '# '),
]

text = prompt(message, style=style)
```

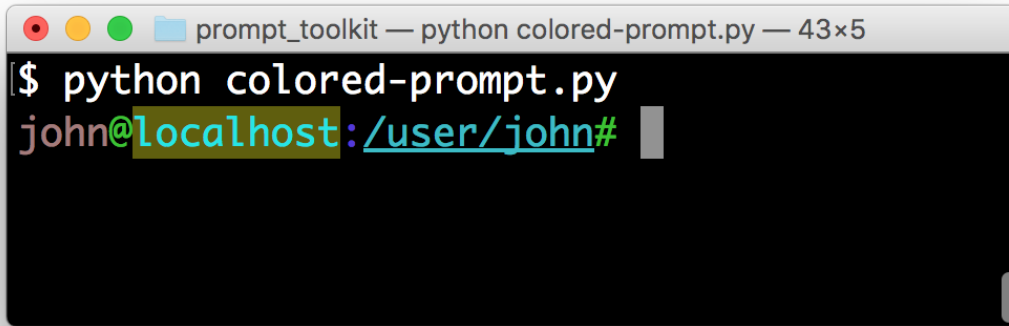

The *message* can be any kind of formatted text, as discussed [here](#). It can also be a callable that returns some formatted text.

By default, colors are taken from the 256 color palette. If you want to have 24bit true color, this is possible by adding the `color_depth=ColorDepth.TRUE_COLOR` option to the `prompt()` function.

```
from prompt_toolkit.output import ColorDepth

text = prompt(message, style=style, color_depth=ColorDepth.TRUE_COLOR)
```


3.5.5 Autocompletion

Autocompletion can be added by passing a `completer` parameter. This should be an instance of the *Completer* abstract base class. *WordCompleter* is an example of a completer that implements that interface.

```
from prompt_toolkit import prompt
from prompt_toolkit.completion import WordCompleter

html_completer = WordCompleter(['<html>', '<body>', '<head>', '<title>'])
text = prompt('Enter HTML: ', completer=html_completer)
print('You said: %s' % text)
```

WordCompleter is a simple completer that completes the last word before the cursor with any of the given words.

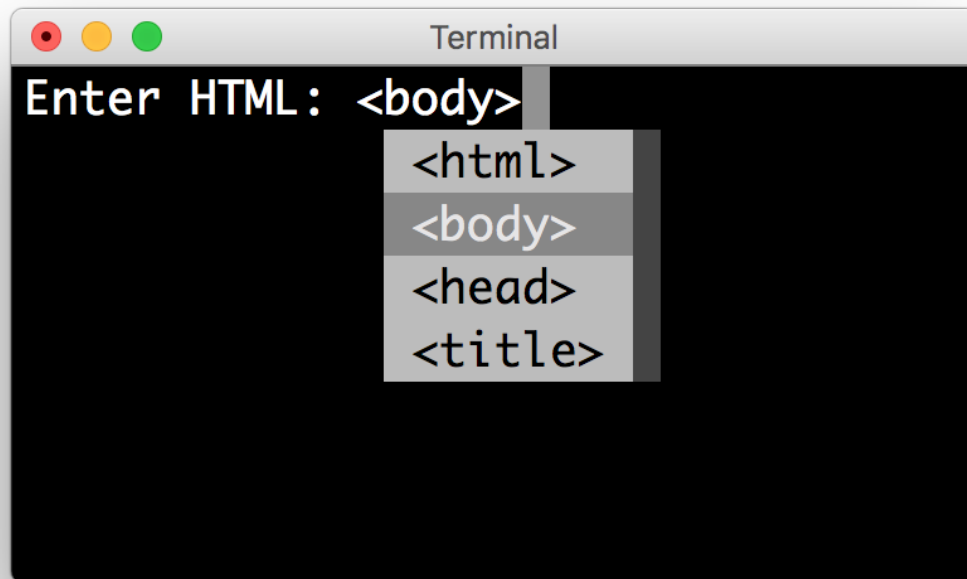

Note: Note that in `prompt_toolkit 2.0`, the auto completion became synchronous. This means that if it takes a long time to compute the completions, that this will block the event loop and the input processing.

For heavy completion algorithms, it is recommended to wrap the completer in a [*ThreadedCompleter*](#) in order to run it in a background thread.

Nested completion

Sometimes you have a command line interface where the completion depends on the previous words from the input. Examples are the CLIs from routers and switches. A simple [*WordCompleter*](#) is not enough in that case. We want to be able to define completions at multiple hierarchical levels. [*NestedCompleter*](#) solves this issue:

```
from prompt_toolkit import prompt
from prompt_toolkit.completion import NestedCompleter

completer = NestedCompleter.from_nested_dict({
    'show': {
        'version': None,
        'clock': None,
        'ip': {
            'interface': {'brief'}
        }
    },
    'exit': None,
```

(continues on next page)

(continued from previous page)

```

})

text = prompt('# ', completer=completer)
print('You said: %s' % text)

```

Whenever there is a `None` value in the dictionary, it means that there is no further nested completion at that point. When all values of a dictionary would be `None`, it can also be replaced with a set.

A custom completer

For more complex examples, it makes sense to create a custom completer. For instance:

```

from prompt_toolkit import prompt
from prompt_toolkit.completion import Completer, Completion

class MyCustomCompleter(Completer):
    def get_completions(self, document, complete_event):
        yield Completion('completion', start_position=0)

text = prompt('> ', completer=MyCustomCompleter())

```

A `Completer` class has to implement a generator named `get_completions()` that takes a `Document` and yields the current `Completion` instances. Each completion contains a portion of text, and a position.

The position is used for fixing text before the cursor. Pressing the tab key could for instance turn parts of the input from lowercase to uppercase. This makes sense for a case insensitive completer. Or in case of a fuzzy completion, it could fix typos. When `start_position` is something negative, this amount of characters will be deleted and replaced.

Styling individual completions

Each completion can provide a custom style, which is used when it is rendered in the completion menu or toolbar. This is possible by passing a style to each `Completion` instance.

```

from prompt_toolkit.completion import Completer, Completion


class MyCustomCompleter(Completer):
    def get_completions(self, document, complete_event):
        # Display this completion, black on yellow.
        yield Completion('completion1', start_position=0,
                         style='bg:ansiyellow fg:ansiblack')

        # Underline completion.
        yield Completion('completion2', start_position=0,
                         style='underline')

        # Specify class name, which will be looked up in the style sheet.
        yield Completion('completion3', start_position=0,
                         style='class:special-completion')

```

The “colorful-prompts.py” example uses completion styling:

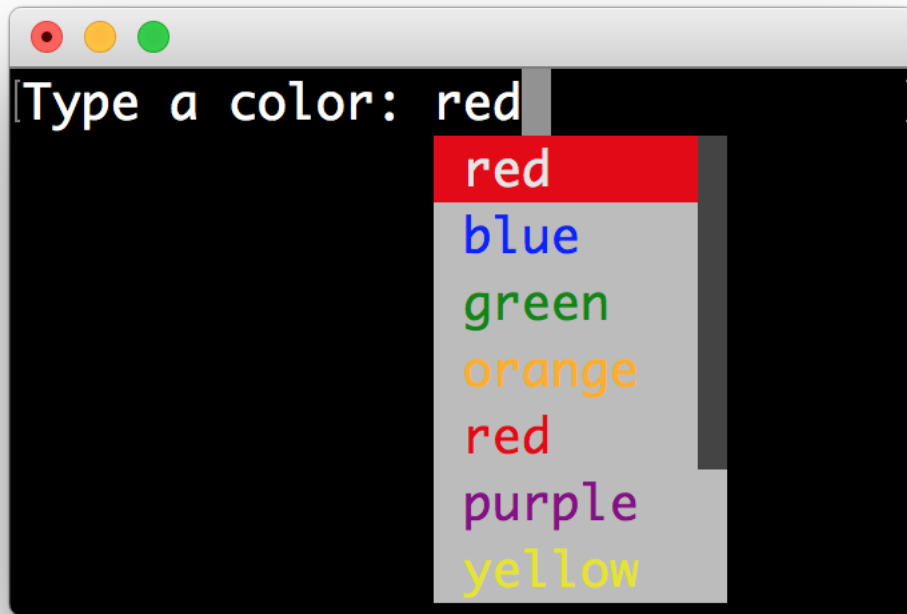

Finally, it is possible to pass *formatted text* for the display attribute of a *Completion*. This provides all the freedom you need to display the text in any possible way. It can also be combined with the *style* attribute. For instance:

```
from prompt_toolkit.completion import Completer, Completion
from prompt_toolkit.formatted_text import HTML

class MyCustomCompleter(Completer):
    def get_completions(self, document, complete_event):
        yield Completion(
            'completion1', start_position=0,
            display=HTML('<b>completion</b><ansired>1</ansired>'),
            style='bg:ansiyellow')
```

Fuzzy completion

If one possible completion is “django_migrations”, a fuzzy completer would allow you to get this by typing “djm” only, a subset of characters for this string.

Prompt_toolkit ships with a *FuzzyCompleter* and *FuzzyWordCompleter* class. These provide the means for doing this kind of “fuzzy completion”. The first one can take any completer instance and wrap it so that it becomes a fuzzy completer. The second one behaves like a *WordCompleter* wrapped into a *FuzzyCompleter*.

Complete while typing

Autocompletions can be generated automatically while typing or when the user presses the tab key. This can be configured with the `complete_while_typing` option:

```
text = prompt('Enter HTML: ', completer=my_completer,
              complete_while_typing=True)
```

Notice that this setting is incompatible with the `enable_history_search` option. The reason for this is that the up and down key bindings would conflict otherwise. So, make sure to disable history search for this.

Asynchronous completion

When generating the completions takes a lot of time, it's better to do this in a background thread. This is possible by wrapping the completer in a `ThreadedCompleter`, but also by passing the `complete_in_thread=True` argument.

```
text = prompt('> ', completer=MyCustomCompleter(), complete_in_thread=True)
```

3.5.6 Input validation

A prompt can have a validator attached. This is some code that will check whether the given input is acceptable and it will only return it if that's the case. Otherwise it will show an error message and move the cursor to a given position.

A validator should implement the `Validator` abstract base class. This requires only one method, named `validate` that takes a `Document` as input and raises `ValidationError` when the validation fails.

```
from prompt_toolkit.validation import Validator, ValidationError
from prompt_toolkit import prompt


class NumberValidator(Validator):
    def validate(self, document):
        text = document.text

        if text and not text.isdigit():
            i = 0

            # Get index of first non numeric character.
            # We want to move the cursor here.
            for i, c in enumerate(text):
                if not c.isdigit():
                    break

            raise ValidationError(message='This input contains non-numeric characters',
                                cursor_position=i)

number = int(prompt('Give a number: ', validator=NumberValidator()))
print('You said: %i' % number)
```

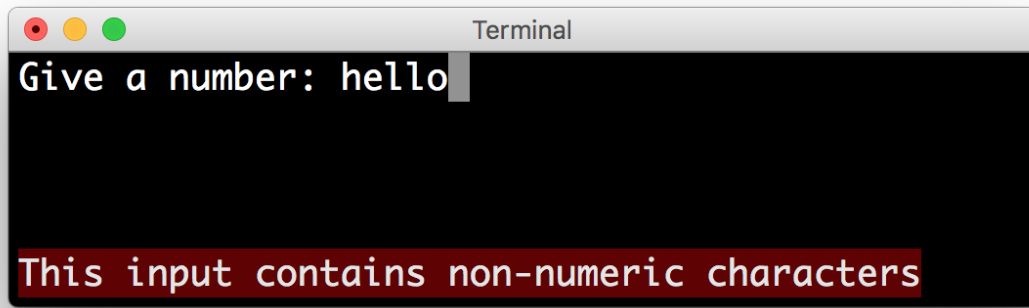

By default, the input is validated in real-time while the user is typing, but `prompt_toolkit` can also validate after the user presses the enter key:

```
prompt('Give a number: ', validator=NumberValidator(),
       validate_while_typing=False)
```

If the input validation contains some heavy CPU intensive code, but you don't want to block the event loop, then it's recommended to wrap the validator class in a [*ThreadedValidator*](#).

Validator from a callable

Instead of implementing the [*Validator*](#) abstract base class, it is also possible to start from a simple function and use the [*from_callable\(\)*](#) classmethod. This is easier and sufficient for probably 90% of the validators. It looks as follows:

```
from prompt_toolkit.validation import Validator
from prompt_toolkit import prompt

def is_number(text):
    return text.isdigit()

validator = Validator.from_callable(
    is_number,
    error_message='This input contains non-numeric characters',
    move_cursor_to_end=True)

number = int(prompt('Give a number: ', validator=validator))
print('You said: %i' % number)
```

We define a function that takes a string, and tells whether it's valid input or not by returning a boolean. [*from_callable\(\)*](#) turns that into a [*Validator*](#) instance. Notice that setting the cursor position is not possible this way.

3.5.7 History

A *History* object keeps track of all the previously entered strings, so that the up-arrow can reveal previously entered items.

The recommended way is to use a *PromptSession*, which uses an *InMemoryHistory* for the entire session by default. The following example has a history out of the box:

```
from prompt_toolkit import PromptSession

session = PromptSession()

while True:
    session.prompt()
```

To persist a history to disk, use a *FileHistory* instead of the default *InMemoryHistory*. This history object can be passed either to a *PromptSession* or to the *prompt()* function. For instance:

```
from prompt_toolkit import PromptSession
from prompt_toolkit.history import FileHistory

session = PromptSession(history=FileHistory('~/.myhistory'))

while True:
    session.prompt()
```

3.5.8 Auto suggestion

Auto suggestion is a way to propose some input completions to the user like the *fish shell*.

Usually, the input is compared to the history and when there is another entry starting with the given text, the completion will be shown as gray text behind the current input. Pressing the right arrow → or c-e will insert this suggestion, alt-f will insert the first word of the suggestion.


Note: When suggestions are based on the history, don't forget to share one *History* object between consecutive *prompt()* calls. Using a *PromptSession* does this for you.

Example:

```
from prompt_toolkit import PromptSession
from prompt_toolkit.history import InMemoryHistory
from prompt_toolkit.auto_suggest import AutoSuggestFromHistory

session = PromptSession()

while True:
    text = session.prompt('> ', auto_suggest=AutoSuggestFromHistory())
    print('You said: %s' % text)
```

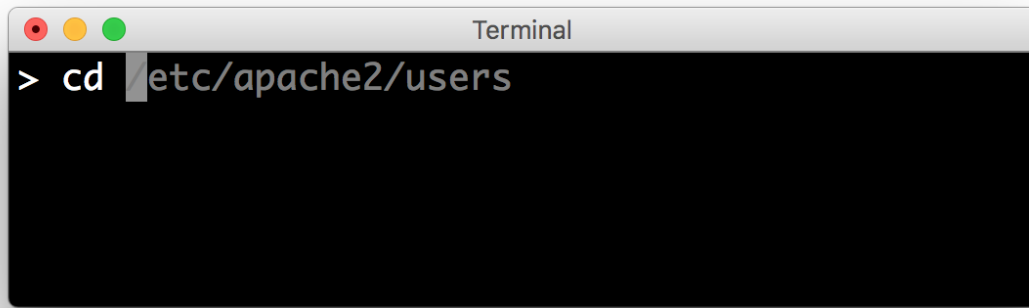

A suggestion does not have to come from the history. Any implementation of the [AutoSuggest](#) abstract base class can be passed as an argument.

3.5.9 Adding a bottom toolbar

Adding a bottom toolbar is as easy as passing a `bottom_toolbar` argument to `prompt()`. This argument can be either plain text, *formatted text* or a callable that returns plain or formatted text.


When a function is given, it will be called every time the prompt is rendered, so the bottom toolbar can be used to display dynamic information.

The toolbar is always erased when the prompt returns. Here we have an example of a callable that returns an [HTML](#) object. By default, the toolbar has the **reversed style**, which is why we are setting the background instead of the foreground.

```
from prompt_toolkit import prompt
from prompt_toolkit.formatted_text import HTML

def bottom_toolbar():
    return HTML('This is a <b><style bg="ansired">Toolbar</style></b>!')

text = prompt('> ', bottom_toolbar=bottom_toolbar)
print('You said: %s' % text)
```

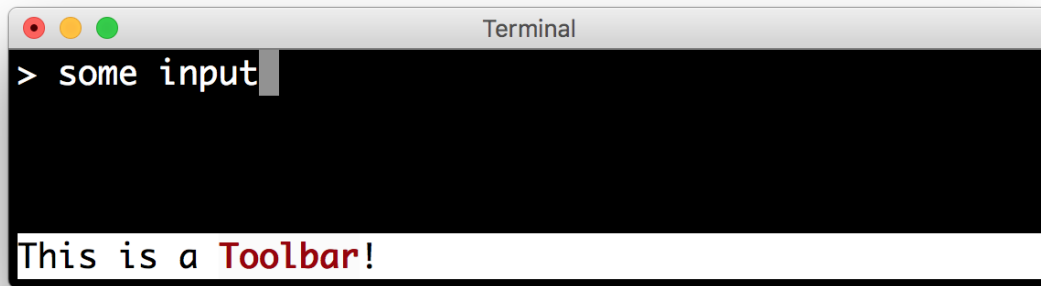

Similar, we could use a list of style/text tuples.

```
from prompt_toolkit import prompt
from prompt_toolkit.styles import Style

def bottom_toolbar():
    return [('class:bottom-toolbar', ' This is a toolbar. ')]

style = Style.from_dict({
    'bottom-toolbar': 'ffffff bg:#333333',
})

text = prompt('> ', bottom_toolbar=bottom_toolbar, style=style)
print('You said: %s' % text)
```

The default class name is `bottom-toolbar` and that will also be used to fill the background of the toolbar.

3.5.10 Adding a right prompt

The `prompt()` function has out of the box support for right prompts as well. People familiar to ZSH could recognise this as the `R_PROMPT` option.


So, similar to adding a bottom toolbar, we can pass an `rprompt` argument. This can be either plain text, *formatted text* or a callable which returns either.

```
from prompt_toolkit import prompt
from prompt_toolkit.styles import Style

example_style = Style.from_dict({
    'rprompt': 'bg:#ff0066 #ffffff',
})

def get_rprompt():
    return '<rprompt>'

answer = prompt('> ', rprompt=get_rprompt, style=example_style)
```

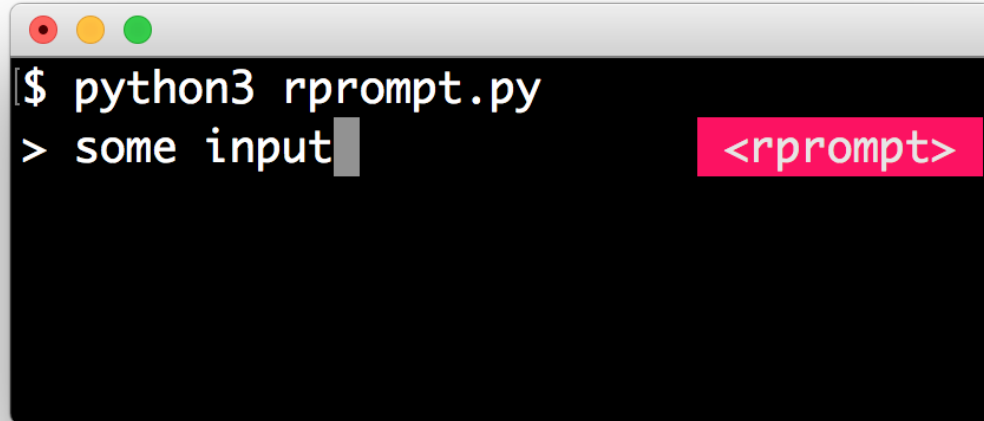

The `get_rprompt` function can return any kind of formatted text such as [HTML](#). It is also possible to pass text directly to the `rprompt` argument of the `prompt()` function. It does not have to be a callable.

3.5.11 Vi input mode

Prompt-toolkit supports both Emacs and Vi key bindings, similar to Readline. The `prompt()` function will use Emacs bindings by default. This is done because on most operating systems, also the Bash shell uses Emacs bindings by default, and that is more intuitive. If however, Vi binding are required, just pass `vi_mode=True`.

```
from prompt_toolkit import prompt

prompt('> ', vi_mode=True)
```

3.5.12 Adding custom key bindings

By default, every prompt already has a set of key bindings which implements the usual Vi or Emacs behaviour. We can extend this by passing another [KeyBindings](#) instance to the `key_bindings` argument of the `prompt()` function or the `PromptSession` class.

An example of a prompt that prints 'hello world' when Control-T is pressed.

```
from prompt_toolkit import prompt
from prompt_toolkit.application import run_in_terminal
from prompt_toolkit.key_binding import KeyBindings

bindings = KeyBindings()

@bindings.add('c-t')
def _(event):
    " Say 'hello' when `c-t` is pressed. "
```

(continues on next page)

(continued from previous page)

```

def print_hello():
    print('hello world')
run_in_terminal(print_hello)

@bindings.add('c-x')
def _(event):
    " Exit when `c-x` is pressed. "
    event.app.exit()

text = prompt('> ', key_bindings=bindings)
print('You said: %s' % text)

```

Note that we use `run_in_terminal()` for the first key binding. This ensures that the output of the print-statement and the prompt don't mix up. If the key bindings doesn't print anything, then it can be handled directly without nesting functions.

Enable key bindings according to a condition

Often, some key bindings can be enabled or disabled according to a certain condition. For instance, the Emacs and Vi bindings will never be active at the same time, but it is possible to switch between Emacs and Vi bindings at run time.

In order to enable a key binding according to a certain condition, we have to pass it a *Filter*, usually a *Condition* instance. (*Read more about filters.*)

```

from prompt_toolkit import prompt
from prompt_toolkit.filters import Condition
from prompt_toolkit.key_binding import KeyBindings

bindings = KeyBindings()

@Condition
def is_active():
    " Only activate key binding on the second half of each minute. "
    return datetime.datetime.now().second > 30

@bindings.add('c-t', filter=is_active)
def _(event):
    # ...
    pass

prompt('> ', key_bindings=bindings)

```

Dynamically switch between Emacs and Vi mode

The *Application* has an `editing_mode` attribute. We can change the key bindings by changing this attribute from `EditingMode.VI` to `EditingMode.EMACS`.

```
from prompt_toolkit import prompt
from prompt_toolkit.application.current import get_app
from prompt_toolkit.enums import EditingMode
from prompt_toolkit.key_binding import KeyBindings

def run():
    # Create a set of key bindings.
    bindings = KeyBindings()

    # Add an additional key binding for toggling this flag.
    @bindings.add('f4')
    def _(event):
        " Toggle between Emacs and Vi mode. "
        app = event.app

        if app.editing_mode == EditingMode.VI:
            app.editing_mode = EditingMode.EMACS
        else:
            app.editing_mode = EditingMode.VI

    # Add a toolbar at the bottom to display the current input mode.
    def bottom_toolbar():
        " Display the current input mode. "
        text = 'Vi' if get_app().editing_mode == EditingMode.VI else 'Emacs'
        return [
            ('class:toolbar', ' [F4] %s ' % text)
        ]

    prompt('> ', key_bindings=bindings, bottom_toolbar=bottom_toolbar)

run()
```

Read more about key bindings ...

Using control-space for completion

An popular short cut that people sometimes use it to use control-space for opening the autocompletion menu instead of the tab key. This can be done with the following key binding.

```
kb = KeyBindings()

@kb.add('c-space')
def _(event):
    " Initialize autocompletion, or select the next completion. "
    buff = event.app.current_buffer
    if buff.complete_state:
        buff.complete_next()
```

(continues on next page)

(continued from previous page)

```
else:
    buff.start_completion(select_first=False)
```

3.5.13 Other prompt options

Multiline input

Reading multiline input is as easy as passing the `multiline=True` parameter.

```
from prompt_toolkit import prompt

prompt('> ', multiline=True)
```


A side effect of this is that the enter key will now insert a newline instead of accepting and returning the input. The user will now have to press `Meta+Enter` in order to accept the input. (Or `Escape` followed by `Enter`.)

It is possible to specify a continuation prompt. This works by passing a `prompt_continuation` callable to `prompt()`. This function is supposed to return *formatted text*, or a list of `(style, text)` tuples. The width of the returned text should not exceed the given width. (The width of the prompt margin is defined by the `prompt`.)

```
from prompt_toolkit import prompt

def prompt_continuation(width, line_number, is_soft_wrap):
    return '.' * width
    # Or: return [C, '.' * width)]

prompt('multiline input> ', multiline=True,
       prompt_continuation=prompt_continuation)
```

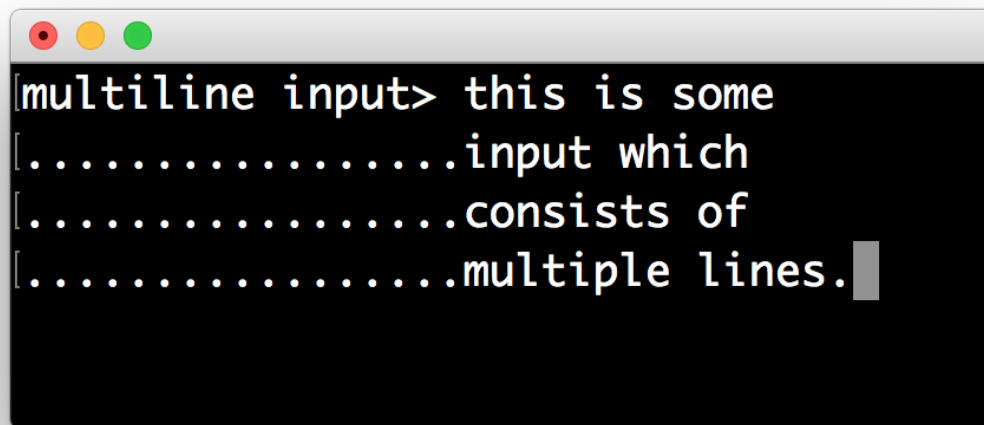

Passing a default

A default value can be given:

```
from prompt_toolkit import prompt
import getpass

prompt('What is your name: ', default='%s' % getpass.getuser())
```

Mouse support

There is limited mouse support for positioning the cursor, for scrolling (in case of large multiline inputs) and for clicking in the autocompletion menu.

Enabling can be done by passing the `mouse_support=True` option.

```
from prompt_toolkit import prompt

prompt('What is your name: ', mouse_support=True)
```

Line wrapping

Line wrapping is enabled by default. This is what most people are used to and this is what GNU Readline does. When it is disabled, the input string will scroll horizontally.

```
from prompt_toolkit import prompt

prompt('What is your name: ', wrap_lines=False)
```

Password input

When the `is_password=True` flag has been given, the input is replaced by asterisks (*) characters).

```
from prompt_toolkit import prompt

prompt('Enter password: ', is_password=True)
```

3.5.14 Cursor shapes

Many terminals support displaying different types of cursor shapes. The most common are block, beam or underscore. Either blinking or not. It is possible to decide which cursor to display while asking for input, or in case of Vi input mode, have a modal prompt for which its cursor shape changes according to the input mode.

```
from prompt_toolkit import prompt
from prompt_toolkit.cursor_shapes import CursorShape, ModalCursorShapeConfig

# Several possible values for the `cursor_shape_config` parameter:
prompt('>', cursor=CursorShape.BLOCK)
prompt('>', cursor=CursorShape.UNDERLINE)
prompt('>', cursor=CursorShape.BEAM)
```

(continues on next page)

(continued from previous page)

```

prompt('>', cursor=CursorShape.BLINKING_BLOCK)
prompt('>', cursor=CursorShape.BLINKING_UNDERLINE)
prompt('>', cursor=CursorShape.BLINKING_BEAM)
prompt('>', cursor=ModalCursorShapeConfig())

```

3.5.15 Prompt in an *asyncio* application

Note: New in prompt_toolkit 3.0. (In prompt_toolkit 2.0 this was possible using a work-around).

For *asyncio* applications, it's very important to never block the eventloop. However, `prompt()` is blocking, and calling this would freeze the whole application. Asyncio actually won't even allow us to run that function within a coroutine. The answer is to call `prompt_async()` instead of `prompt()`. The *async* variation returns a coroutines and is awaitable.

```

from prompt_toolkit import PromptSession
from prompt_toolkit.patch_stdout import patch_stdout

async def my_coroutine():
    session = PromptSession()
    while True:
        with patch_stdout():
            result = await session.prompt_async('Say something: ')
            print('You said: %s' % result)

```

The `patch_stdout()` context manager is optional, but it's recommended, because other coroutines could print to stdout. This ensures that other output won't destroy the prompt.

3.5.16 Reading keys from stdin, one key at a time, but without a prompt

Suppose that you want to use prompt_toolkit to read the keys from stdin, one key at a time, but not render a prompt to the output, that is also possible:

```

import asyncio

from prompt_toolkit.input import create_input
from prompt_toolkit.keys import Keys

async def main() -> None:
    done = asyncio.Event()
    input = create_input()

    def keys_ready():
        for key_press in input.read_keys():
            print(key_press)

            if key_press.key == Keys.ControlC:
                done.set()

```

(continues on next page)

(continued from previous page)

```
with input.raw_mode():
    with input.attach(keys_ready):
        await done.wait()

if __name__ == "__main__":
    asyncio.run(main())
```

The above snippet will print the *KeyPress* object whenever a key is pressed. This is also cross platform, and should work on Windows.

3.6 Dialogs


Prompt_toolkit ships with a high level API for displaying dialogs, similar to the Whiptail program, but in pure Python.

3.6.1 Message box

Use the `message_dialog()` function to display a simple message box. For instance:

```
from prompt_toolkit.shortcuts import message_dialog

message_dialog(
    title='Example dialog window',
    text='Do you want to continue?\nPress ENTER to quit.').run()
```

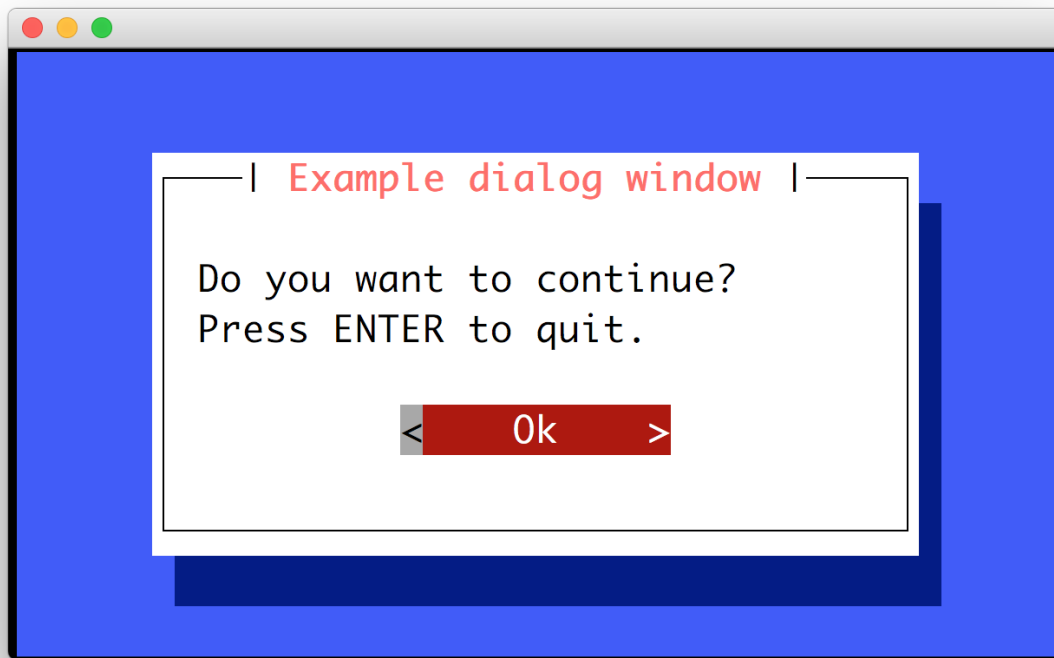


3.6.2 Input box

The `input_dialog()` function can display an input box. It will return the user input as a string.

```
from prompt_toolkit.shortcuts import input_dialog

text = input_dialog(
    title='Input dialog example',
    text='Please type your name:').run()
```

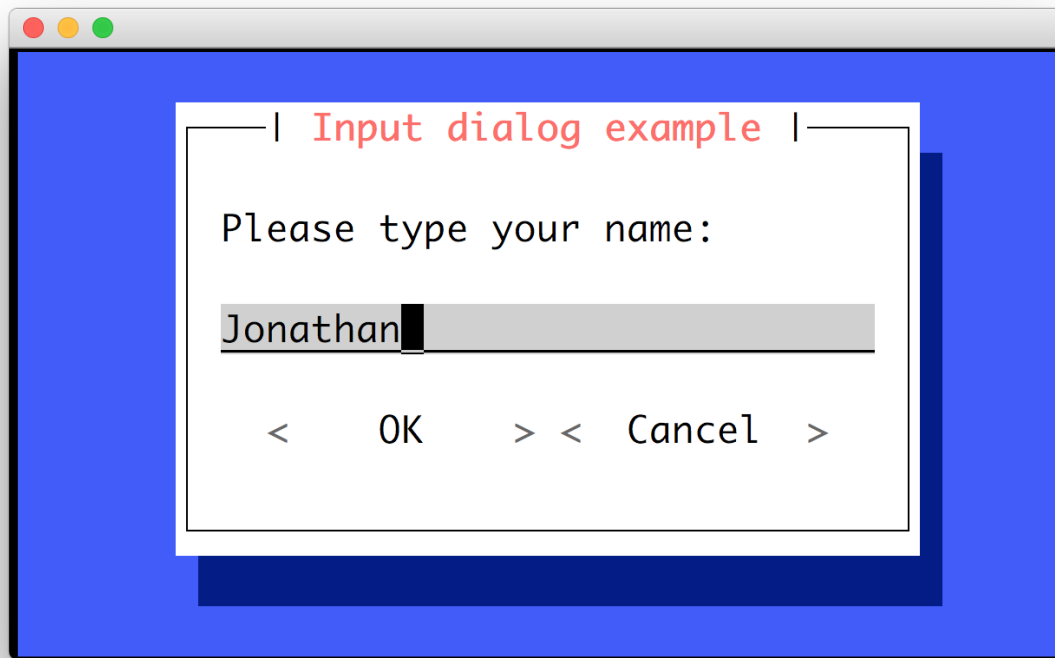


The `password=True` option can be passed to the `input_dialog()` function to turn this into a password input box.

3.6.3 Yes/No confirmation dialog

The `yes_no_dialog()` function displays a yes/no confirmation dialog. It will return a boolean according to the selection.

```
from prompt_toolkit.shortcuts import yes_no_dialog

result = yes_no_dialog(
    title='Yes/No dialog example',
    text='Do you want to confirm?').run()
```

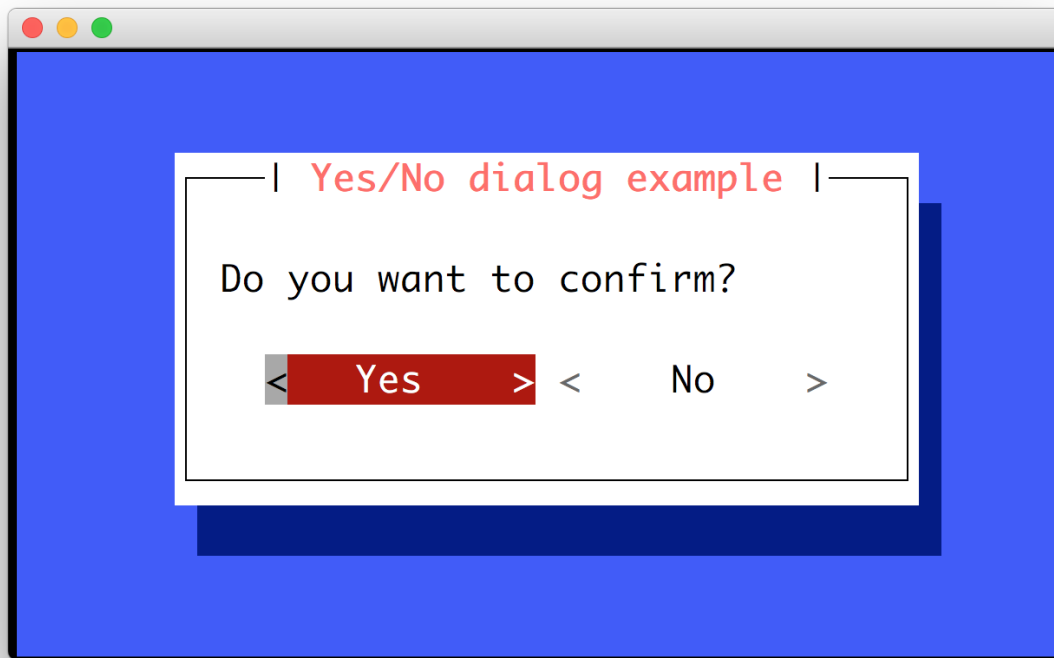


3.6.4 Button dialog

The `button_dialog()` function displays a dialog with choices offered as buttons. Buttons are indicated as a list of tuples, each providing the label (first) and return value if clicked (second).

```
from prompt_toolkit.shortcuts import button_dialog

result = button_dialog(
    title='Button dialog example',
    text='Do you want to confirm?',
    buttons=[
        ('Yes', True),
        ('No', False),
        ('Maybe...', None)
    ],
).run()
```

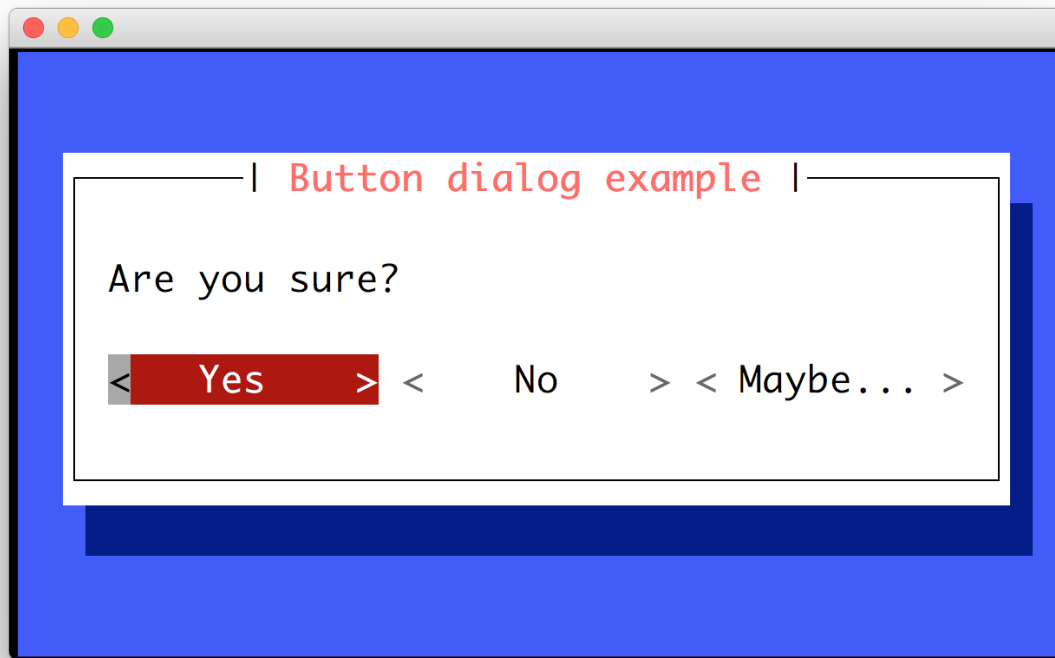

3.6.5 Radio list dialog

The `radiolist_dialog()` function displays a dialog with choices offered as a radio list. The values are provided as a list of tuples, each providing the return value (first element) and the displayed value (second element).

```
from prompt_toolkit.shortcuts import radiolist_dialog

result = radiolist_dialog(
    title="RadioList dialog",
    text="Which breakfast would you like ?",
    values=[
        ("breakfast1", "Eggs and beacon"),
        ("breakfast2", "French breakfast"),
        ("breakfast3", "Equestrian breakfast")
    ]
).run()
```

3.6.6 Checkbox list dialog

The `checkboxlist_dialog()` has the same usage and purpose than the `Radiolist` dialog, but allows several values to be selected and therefore returned.

```
from prompt_toolkit.shortcuts import checkboxlist_dialog

results_array = checkboxlist_dialog(
    title="CheckboxList dialog",
    text="What would you like in your breakfast ?",
    values=[
        ("eggs", "Eggs"),
        ("bacon", "Bacon"),
        ("croissants", "20 Croissants"),
        ("daily", "The breakfast of the day")
    ]
).run()
```

3.6.7 Styling of dialogs

A custom `Style` instance can be passed to all dialogs to override the default style. Also, text can be styled by passing an `HTML` object.

```
from prompt_toolkit.formatted_text import HTML
from prompt_toolkit.shortcuts import message_dialog
from prompt_toolkit.styles import Style

example_style = Style.from_dict({
    'dialog': 'bg:#88ff88',
    'dialog frame.label': 'bg:#ffffff #000000',
    'dialog.body': 'bg:#000000 #00ff00',
    'dialog shadow': 'bg:#00aa00',
})

message_dialog(
    title=HTML('<style bg="blue" fg="white">Styled</style> '
               '<style fg="ansired">dialog</style> window'),
    text='Do you want to continue?\nPress ENTER to quit.',
    style=example_style).run()
```



3.6.8 Styling reference sheet

In reality, the shortcut commands presented above build a full-screen frame by using a list of components. The two tables below allow you to get the classnames available for each shortcut, therefore you will be able to provide a custom style for every element that is displayed, using the method provided above.

Note: All the shortcuts use the `Dialog` component, therefore it isn't specified explicitly below.

Shortcut	Components used
yes_no_dialog	• Label • Button (x2)
button_dialog	• Label • Button
input_dialog	• TextArea • Button (x2)
message_dialog	• Label • Button
radiolist_dialog	• Label • RadioList • Button (x2)
checkboxlist_dialog	• Label • CheckboxList • Button (x2)
progress_dialog	• Label • TextArea (locked) • ProgressBar

Components	Available classnames
Dialog	• dialog • dialog.body
TextArea	• text-area • text-area.prompt
Label	• label
Button	• button • button.focused • button.arrow • button.text
Frame	• frame • frame.border • frame.label
Shadow	• shadow
RadioList	• radio-list • radio • radio-checked • radio-selected
CheckboxList	• checkbox-list • checkbox • checkbox-checked • checkbox-selected
VerticalLine	• line • vertical-line
HorizontalLine	• line • horizontal-line
ProgressBar	• progress-bar • progress-bar.used

Example

Let's customize the example of the `checkboxlist_dialog`.

It uses 2 Button, a `CheckboxList` and a `Label`, packed inside a `Dialog`. Therefore we can customize each of these elements separately, using for instance:

```
from prompt_toolkit.shortcuts import checkboxlist_dialog
from prompt_toolkit.styles import Style

results = checkboxlist_dialog(
    title="CheckboxList dialog",
    text="What would you like in your breakfast ?",
    values=[
        ("eggs", "Eggs"),
        ("bacon", "Bacon"),
        ("croissants", "20 Croissants"),
        ("daily", "The breakfast of the day")
    ],
    style=Style.from_dict({
        'dialog': 'bg:#cdbbb3',
        'button': 'bg:#bf99a4',
        'checkbox': 'bg:#e8612c',
        'dialog.body': 'bg:#a9cfd0',
        'dialog shadow': 'bg:#c98982',
        'frame.label': 'bg:#fcaca3',
        'dialog.body label': 'bg:#fd8bb6',
    })
).run()
```

3.7 Progress bars

Prompt_toolkit ships with a high level API for displaying progress bars, inspired by `tqdm`

Warning: The API for the prompt_toolkit progress bars is still very new and can possibly change in the future. It is usable and tested, but keep this in mind when upgrading.

Remember that the `examples` directory of the prompt_toolkit repository ships with many progress bar examples as well.

3.7.1 Simple progress bar

Creating a new progress bar can be done by calling the `ProgressBar` context manager.

The progress can be displayed for any iterable. This works by wrapping the iterable (like `range`) with the `ProgressBar` context manager itself. This way, the progress bar knows when the next item is consumed by the forloop and when progress happens.

```
from prompt_toolkit.shortcuts import ProgressBar
import time
```

(continues on next page)

(continued from previous page)

```
with ProgressBar() as pb:
    for i in pb(range(800)):
        time.sleep(.01)
```

```
$ python simple-progress-bar.py 39.1% [=====>] 313/800 eta [00:05]
```

Keep in mind that not all iterables can report their total length. This happens with a typical generator. In that case, you can still pass the total as follows in order to make displaying the progress possible:

```
def some_iterable():
    yield ...

with ProgressBar() as pb:
    for i in pb(some_iterable, total=1000):
        time.sleep(.01)
```

3.7.2 Multiple parallel tasks

A prompt_toolkit *ProgressBar* can display the progress of multiple tasks running in parallel. Each task can run in a separate thread and the *ProgressBar* user interface runs in its own thread.

Notice that we set the “daemon” flag for both threads that run the tasks. This is because control-c will stop the progress and quit our application. We don’t want the application to wait for the background threads to finish. Whether you want this depends on the application.

```
from prompt_toolkit.shortcuts import ProgressBar
import time
import threading

with ProgressBar() as pb:
    # Two parallel tasks.
    def task_1():
        for i in pb(range(100)):
            time.sleep(.05)

    def task_2():
        for i in pb(range(150)):
            time.sleep(.08)

    # Start threads.
    t1 = threading.Thread(target=task_1)
    t2 = threading.Thread(target=task_2)
    t1.daemon = True
    t2.daemon = True
    t1.start()
    t2.start()

    # Wait for the threads to finish. We use a timeout for the join() call,
```

(continues on next page)

(continued from previous page)

```
# because on Windows, join cannot be interrupted by Control-C or any other
# signal.
for t in [t1, t2]:
    while t.is_alive():
        t.join(timeout=.5)
```

```
$ python two-tasks.py
100.0% [=====>] 100/100 eta [00:00]
51.3% [=====>] 77/150 eta [00:05]
```

3.7.3 Adding a title and label

Each progress bar can have one title, and for each task an individual label. Both the title and the labels can be *formatted text*.

```
from prompt_toolkit.shortcuts import ProgressBar
from prompt_toolkit.formatted_text import HTML
import time

title = HTML('Downloading <style bg="yellow" fg="black">4 files...</style>')
label = HTML('<ansired>some file</ansired>: ')

with ProgressBar(title=title) as pb:
    for i in pb(range(800), label=label):
        time.sleep(.01)
```

```
$ python colored-title-and-label.py
Downloading 4 files...
some file: 31.5% [==>] 252/800 eta [00:05]
```

3.7.4 Formatting the progress bar

The visualisation of a *ProgressBar* can be customized by using a different sequence of formatters. The default formatting looks something like this:

```
from prompt_toolkit.shortcuts.progress_bar.formatters import *

default_formatting = [
    Label(),
    Text(' '),
    Percentage(),
    Text(' '),
    Bar(),
    Text(' '),
    Progress(),
    Text(' '),
    Text('eta [', style='class:time-left'),
    TimeLeft(),
    Text(']', style='class:time-left'),
```

(continues on next page)

(continued from previous page)

```
    Text(' '),
]
```

That sequence of *Formatter* can be passed to the *formatter* argument of *ProgressBar*. So, we could change this and modify the progress bar to look like an apt-get style progress bar:

```
from prompt_toolkit.shortcuts import ProgressBar
from prompt_toolkit.styles import Style
from prompt_toolkit.shortcuts.progress_bar import formatters
import time

style = Style.from_dict({
    'label': 'bg:#ffff00 #000000',
    'percentage': 'bg:#ffff00 #000000',
    'current': '#448844',
    'bar': '',
})

custom_formatters = [
    formatters.Label(),
    formatters.Text(':', style='class:percentage'),
    formatters.Percentage(),
    formatters.Text(']', style='class:percentage'),
    formatters.Text(' '),
    formatters.Bar(sym_a='#', sym_b='#', sym_c='.'),
    formatters.Text(' '),
]

with ProgressBar(style=style, formatters=custom_formatters) as pb:
    for i in pb(range(1600), label='Installing'):
        time.sleep(.01)
```

```
$ python styled-apt-get-install.py
Installing: [ 64.4%] [#####.....]
```

3.7.5 Adding key bindings and toolbar

Like other prompt_toolkit applications, we can add custom key bindings, by passing a *KeyBindings* object:

```
from prompt_toolkit import HTML
from prompt_toolkit.key_binding import KeyBindings
from prompt_toolkit.patch_stdout import patch_stdout
from prompt_toolkit.shortcuts import ProgressBar

import os
import time
import signal

bottom_toolbar = HTML('<b>[f]</b> Print "f" <b>[x]</b> Abort.')
```

(continues on next page)

(continued from previous page)

```

# Create custom key bindings first.
kb = KeyBindings()
cancel = [False]

@kb.add('f')
def _(event):
    print('You pressed `f`.')

@kb.add('x')
def _(event):
    " Send Abort (control-c) signal. "
    cancel[0] = True
    os.kill(os.getpid(), signal.SIGINT)

# Use `patch_stdout`, to make sure that prints go above the
# application.
with patch_stdout():
    with ProgressBar(key_bindings=kb, bottom_toolbar=bottom_toolbar) as pb:
        for i in pb(range(800)):
            time.sleep(.01)

            # Stop when the cancel flag has been set.
            if cancel[0]:
                break

```

Notice that we use `patch_stdout()` to make printing text possible while the progress bar is displayed. This ensures that printing happens above the progress bar.

Further, when “x” is pressed, we set a cancel flag, which stops the progress. It would also be possible to send `SIGINT` to the main thread, but that’s not always considered a clean way of cancelling something.

In the example above, we also display a toolbar at the bottom which shows the key bindings.

```

$ python custom-key-bindings-tmp.py
42.6% [=====> ] 341/800 eta [00:04]
[f] Print "f" [x] Abort.

```

Read more about key bindings ...

3.8 Building full screen applications

`prompt_toolkit` can be used to create complex full screen terminal applications. Typically, an application consists of a layout (to describe the graphical part) and a set of key bindings.

The sections below describe the components required for full screen applications (or custom, non full screen applications), and how to assemble them together.

Before going through this page, it could be helpful to go through [asking for input](#) (prompts) first. Many things that apply to an input prompt, like styling, key bindings and so on, also apply to full screen applications.

Note: Also remember that the `examples` directory of the `prompt_toolkit` repository contains plenty of examples. Each example is supposed to explain one idea. So, this as well should help you get started.

Don't hesitate to open a GitHub issue if you feel that a certain example is missing.

3.8.1 A simple application

Every `prompt_toolkit` application is an instance of an `Application` object. The simplest full screen example would look like this:

```
from prompt_toolkit import Application

app = Application(full_screen=True)
app.run()
```

This will display a dummy application that says “No layout specified. Press ENTER to quit.”.

Note: If we wouldn't set the `full_screen` option, the application would not run in the alternate screen buffer, and only consume the least amount of space required for the layout.

An application consists of several components. The most important are:

- I/O objects: the input and output device.
- The layout: this defines the graphical structure of the application. For instance, a text box on the left side, and a button on the right side. You can also think of the layout as a collection of ‘widgets’.
- A style: this defines what colors and underline/bold/italic styles are used everywhere.
- A set of key bindings.

We will discuss all of these in more detail below.

3.8.2 I/O objects

Every `Application` instance requires an I/O object for input and output:

- An `Input` instance, which is an abstraction of the input stream (stdin).
- An `Output` instance, which is an abstraction of the output stream, and is called by the renderer.

Both are optional and normally not needed to pass explicitly. Usually, the default works fine.

There is a third I/O object which is also required by the application, but not passed inside. This is the event loop, an `eventloop` instance. This is basically a while-true loop that waits for user input, and when it receives something (like a key press), it will send that to the appropriate handler, like for instance, a key binding.

When `run()` is called, the event loop will run until the application is done. An application will quit when `exit()` is called.

3.8.3 The layout

A layered layout architecture

There are several ways to create a `prompt_toolkit` layout, depending on how customizable you want things to be. In fact, there are several layers of abstraction.

- The most low-level way of creating a layout is by combining `Container` and `UIControl` objects.

Examples of `Container` objects are `VSplit` (vertical split), `HSplit` (horizontal split) and `FloatContainer`. These containers arrange the layout and can split it in multiple regions. Each container can recursively contain multiple other containers. They can be combined in any way to define the “shape” of the layout.

The `Window` object is a special kind of container that can contain a `UIControl` object. The `UIControl` object is responsible for the generation of the actual content. The `Window` object acts as an adaptor between the `UIControl` and other containers, but it’s also responsible for the scrolling and line wrapping of the content.

Examples of `UIControl` objects are `BufferControl` for showing the content of an editable/scrollable buffer, and `FormattedTextControl` for displaying (*formatted*) text.

Normally, it is never needed to create new `UIControl` or `Container` classes, but instead you would create the layout by composing instances of the existing built-ins.

- A higher level abstraction of building a layout is by using “widgets”. A widget is a reusable layout component that can contain multiple containers and controls. Widgets have a `__pt_container__` function, which returns the root container for this widget. `Prompt_toolkit` contains a couple of widgets like `TextArea`, `Button`, `Frame`, `VerticalLine` and so on.
- The highest level abstractions can be found in the `shortcuts` module. There we don’t have to think about the layout, controls and containers at all. This is the simplest way to use `prompt_toolkit`, but is only meant for specific use cases, like a prompt or a simple dialog window.

Containers and controls

The biggest difference between containers and controls is that containers arrange the layout by splitting the screen in many regions, while controls are responsible for generating the actual content.

Note: Under the hood, the difference is:

- containers use *absolute coordinates*, and paint on a `Screen` instance.
 - user controls create a `UIContent` instance. This is a collection of lines that represent the actual content. A `UIControl` is not aware of the screen.
-

Abstract base class	Examples
<code>Container</code>	<code>HSplit</code> <code>VSplit</code> <code>FloatContainer</code> <code>Window</code> <code>ScrollablePane</code>
<code>UIControl</code>	<code>BufferControl</code> <code>FormattedTextControl</code>

The `Window` class itself is particular: it is a `Container` that can contain a `UIControl`. Thus, it’s the adaptor between the two. The `Window` class also takes care of scrolling the content and wrapping the lines if needed.

Finally, there is the `Layout` class which wraps the whole layout. This is responsible for keeping track of which window has the focus.

Here is an example of a layout that displays the content of the default buffer on the left, and displays “Hello world” on the right. In between it shows a vertical line:

```
from prompt_toolkit import Application
from prompt_toolkit.buffer import Buffer
from prompt_toolkit.layout.containers import VSplit, Window
from prompt_toolkit.layout.controls import BufferControl, FormattedTextControl
from prompt_toolkit.layout.layout import Layout

buffer1 = Buffer() # Editable buffer.

root_container = VSplit([
    # One window that holds the BufferControl with the default buffer on
    # the left.
    Window(content=BufferControl(buffer=buffer1)),

    # A vertical line in the middle. We explicitly specify the width, to
    # make sure that the layout engine will not try to divide the whole
    # width by three for all these windows. The window will simply fill its
    # content by repeating this character.
    Window(width=1, char='|'),

    # Display the text 'Hello world' on the right.
    Window(content=FormattedTextControl(text='Hello world')),
])

layout = Layout(root_container)

app = Application(layout=layout, full_screen=True)
app.run() # You won't be able to Exit this app
```

Notice that if you execute this right now, there is no way to quit this application yet. This is something we explain in the next section below.

More complex layouts can be achieved by nesting multiple *VSplit*, *HSplit* and *FloatContainer* objects.

If you want to make some part of the layout only visible when a certain condition is satisfied, use a *ConditionalContainer*.

Finally, there is *ScrollablePane*, a container class that can be used to create long forms or nested layouts that are scrollable as a whole.

Focusing windows

Focusing something can be done by calling the *focus()* method. This method is very flexible and accepts a *Window*, a *Buffer*, a *UIControl* and more.

In the following example, we use *get_app()* for getting the active application.

```
from prompt_toolkit.application import get_app

# This window was created earlier.
w = Window()

# ...
```

(continues on next page)

(continued from previous page)

```
# Now focus it.
get_app().layout.focus(w)
```

Changing the focus is something which is typically done in a key binding, so read on to see how to define key bindings.

3.8.4 Key bindings

In order to react to user actions, we need to create a *KeyBindings* object and pass that to our *Application*.

There are two kinds of key bindings:

- Global key bindings, which are always active.
- Key bindings that belong to a certain *UIControl* and are only active when this control is focused. Both *BufferControl* *FormattedTextControl* take a *key_bindings* argument.

Global key bindings

Key bindings can be passed to the application as follows:

```
from prompt_toolkit import Application
from prompt_toolkit.key_binding import KeyBindings

kb = KeyBindings()
app = Application(key_bindings=kb)
app.run()
```

To register a new keyboard shortcut, we can use the *add()* method as a decorator of the key handler:

```
from prompt_toolkit import Application
from prompt_toolkit.key_binding import KeyBindings

kb = KeyBindings()

@kb.add('c-q')
def exit_(event):
    """
    Pressing Ctrl-Q will exit the user interface.

    Setting a return value means: quit the event loop that drives the user
    interface and return this value from the `Application.run()` call.
    """
    event.app.exit()

app = Application(key_bindings=kb, full_screen=True)
app.run()
```

The callback function is named *exit_* for clarity, but it could have been named *_* (underscore) as well, because we won't refer to this name.

Read more about key bindings ...

Modal containers

The following container objects take a `modal` argument *VSplit*, *HSplit*, and *FloatContainer*.

Setting `modal=True` makes what is called a **modal** container. Normally, a child container would inherit its parent key bindings. This does not apply to **modal** containers.

Consider a **modal** container (e.g. *VSplit*) is child of another container, its parent. Any key bindings from the parent are not taken into account if the **modal** container (child) has the focus.

This is useful in a complex layout, where many controls have their own key bindings, but you only want to enable the key bindings for a certain region of the layout.

The global key bindings are always active.

3.8.5 More about the Window class

As said earlier, a *Window* is a *Container* that wraps a *UIControl*, like a *BufferControl* or *FormattedTextControl*.

Note: Basically, windows are the leafs in the tree structure that represent the UI.

A *Window* provides a “view” on the *UIControl*, which provides lines of content. The window is in the first place responsible for the line wrapping and scrolling of the content, but there are much more options.

- Adding left or right margins. These are used for displaying scroll bars or line numbers.
- There are the *cursorline* and *cursorcolumn* options. These allow highlighting the line or column of the cursor position.
- Alignment of the content. The content can be left aligned, right aligned or centered.
- Finally, the background can be filled with a default character.

3.8.6 More about buffers and BufferControl

Input processors

A *Processor* is used to postprocess the content of a *BufferControl* before it’s displayed. It can for instance highlight matching brackets or change the visualisation of tabs and so on.

A *Processor* operates on individual lines. Basically, it takes a (formatted) line and produces a new (formatted) line.

Some build-in processors:

Processor	Usage:
<i>HighlightSearchProcessor</i>	Highlight the current search results.
<i>HighlightSelectionProcessor</i>	Highlight the selection.
<i>PasswordProcessor</i>	Display input as asterisks. (* characters).
<i>BracketsMismatchProcessor</i>	Highlight open/close mismatches for brackets.
<i>BeforeInput</i>	Insert some text before.
<i>AfterInput</i>	Insert some text after.
<i>AppendAutoSuggestion</i>	Append auto suggestion text.
<i>ShowLeadingWhiteSpaceProcessor</i>	Visualise leading whitespace.
<i>ShowTrailingWhiteSpaceProcessor</i>	Visualise trailing whitespace.
<i>TabsProcessor</i>	Visualise tabs as <i>n</i> spaces, or some symbols.

A *BufferControl* takes only one processor as input, but it is possible to “merge” multiple processors into one with the *merge_processors()* function.

3.9 Tutorials

3.9.1 Tutorial: Build an SQLite REPL

The aim of this tutorial is to build an interactive command line interface for an SQLite database using *prompt_toolkit*.

First, install the library using pip, if you haven’t done this already.

```
pip install prompt_toolkit
```


Read User Input

Let’s start accepting input using the *prompt()* function. This will ask the user for input, and echo back whatever the user typed. We wrap it in a *main()* function as a good practice.

```
from prompt_toolkit import prompt

def main():
    text = prompt('> ')
    print('You entered:', text)

if __name__ == '__main__':
    main()
```

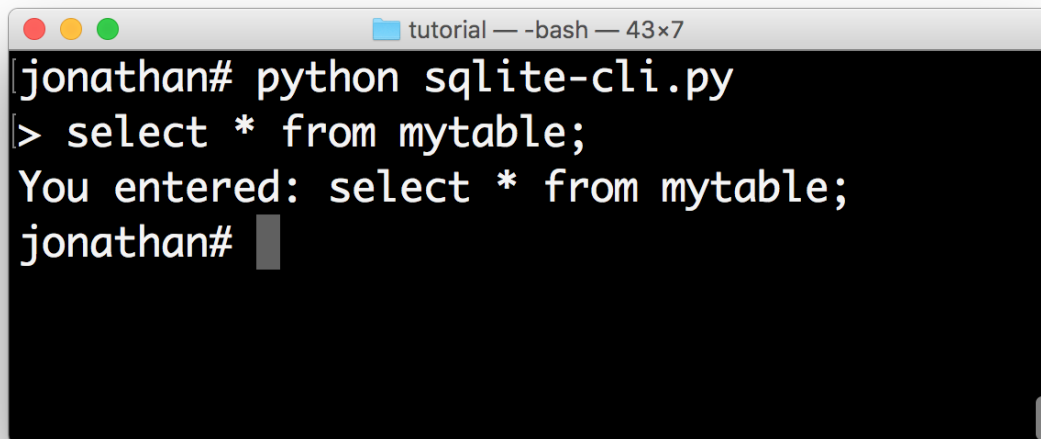

Loop The REPL

Now we want to call the `prompt()` method in a loop. In order to keep the history, the easiest way to do it is to use a `PromptSession`. This uses an `InMemoryHistory` underneath that keeps track of the history, so that if the user presses the up-arrow, they'll see the previous entries.


The `prompt()` method raises `KeyboardInterrupt` when ControlC has been pressed and `EOFError` when ControlD has been pressed. This is what people use for cancelling commands and exiting in a REPL. The try/except below handles these error conditions and make sure that we go to the next iteration of the loop or quit the loop respectively.

```
from prompt_toolkit import PromptSession

def main():
    session = PromptSession()

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
    print('GoodBye!')

if __name__ == '__main__':
    main()
```

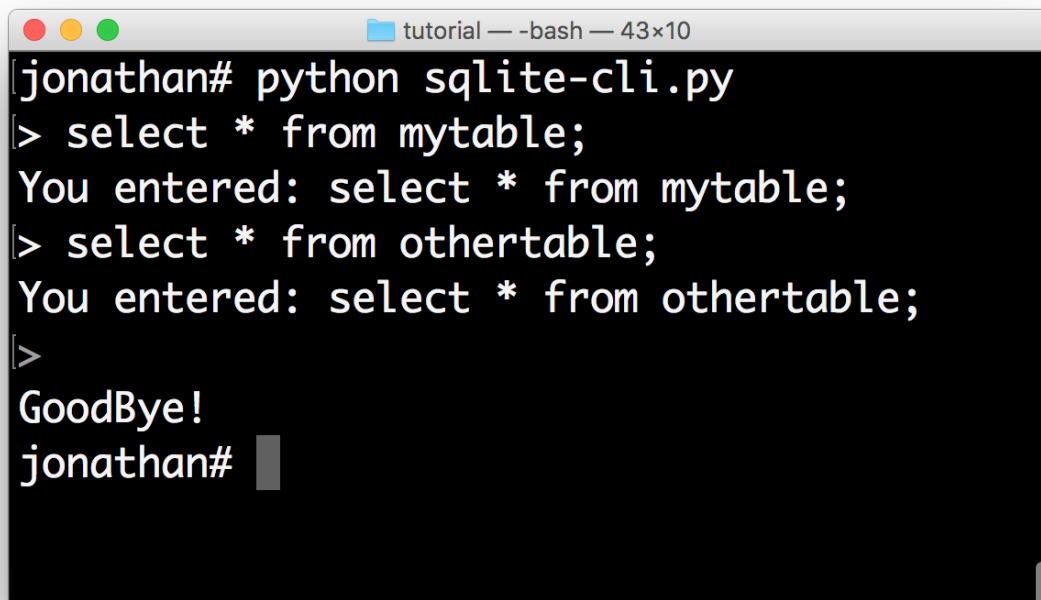A screenshot of a terminal window titled 'tutorial — -bash — 43x10'. The terminal shows the execution of a Python script named 'sqlite-cli.py'. The user 'jonathan' runs the command 'python sqlite-cli.py'. The script prompts for input with '> '. The user enters 'select * from mytable;', and the script outputs 'You entered: select * from mytable;'. The user enters 'select * from othertable;', and the script outputs 'You entered: select * from othertable;'. The user enters '>' again, and the script outputs 'GoodBye!'. The terminal then shows the prompt 'jonathan#' with a cursor.

Syntax Highlighting

This is where things get really interesting. Let's step it up a notch by adding syntax highlighting to the user input. We know that users will be entering SQL statements, so we can leverage the [Pygments](#) library for coloring the input. The `lexer` parameter allows us to set the syntax lexer. We're going to use the `SqlLexer` from the [Pygments](#) library for highlighting.

Notice that in order to pass a Pygments lexer to `prompt_toolkit`, it needs to be wrapped into a [PygmentsLexer](#).

```
from prompt_toolkit import PromptSession
from prompt_toolkit.lexers import PygmentsLexer
from pygments.lexers.sql import SqlLexer

def main():
    session = PromptSession(lexer=PygmentsLexer(SqlLexer))

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
    print('GoodBye!')

if __name__ == '__main__':
    main()
```



Auto-completion

Now we are going to add auto completion. We'd like to display a drop down menu of possible keywords when the user starts typing.

We can do this by creating an `sql_completer` object from the `WordCompleter` class, defining a set of *keywords* for the auto-completion.

Like the lexer, this `sql_completer` instance can be passed to either the `PromptSession` class or the `prompt()` method.


```
from prompt_toolkit import PromptSession
from prompt_toolkit.completion import WordCompleter
from prompt_toolkit.lexers import PygmentsLexer
from pygments.lexers.sql import SqlLexer

sql_completer = WordCompleter([
    'abort', 'action', 'add', 'after', 'all', 'alter', 'analyze', 'and',
    'as', 'asc', 'attach', 'autoincrement', 'before', 'begin', 'between',
    'by', 'cascade', 'case', 'cast', 'check', 'collate', 'column',
    'commit', 'conflict', 'constraint', 'create', 'cross', 'current_date',
    'current_time', 'current_timestamp', 'database', 'default',
    'deferrable', 'deferred', 'delete', 'desc', 'detach', 'distinct',
    'drop', 'each', 'else', 'end', 'escape', 'except', 'exclusive',
    'exists', 'explain', 'fail', 'for', 'foreign', 'from', 'full', 'glob',
    'group', 'having', 'if', 'ignore', 'immediate', 'in', 'index',
    'indexed', 'initially', 'inner', 'insert', 'instead', 'intersect',
    'into', 'is', 'isnull', 'join', 'key', 'left', 'like', 'limit',
    'match', 'natural', 'no', 'not', 'notnull', 'null', 'of', 'offset',
    'on', 'or', 'order', 'outer', 'plan', 'pragma', 'primary', 'query',
    'raise', 'recursive', 'references', 'regexp', 'reindex', 'release',
    'rename', 'replace', 'restrict', 'right', 'rollback', 'row',
    'savepoint', 'select', 'set', 'table', 'temp', 'temporary', 'then',
    'to', 'transaction', 'trigger', 'union', 'unique', 'update', 'using',
    'vacuum', 'values', 'view', 'virtual', 'when', 'where', 'with',
    'without'], ignore_case=True)

def main():
    session = PromptSession(
        lexer=PygmentsLexer(SqlLexer), completer=sql_completer)

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
    print('GoodBye!')

if __name__ == '__main__':
    main()
```

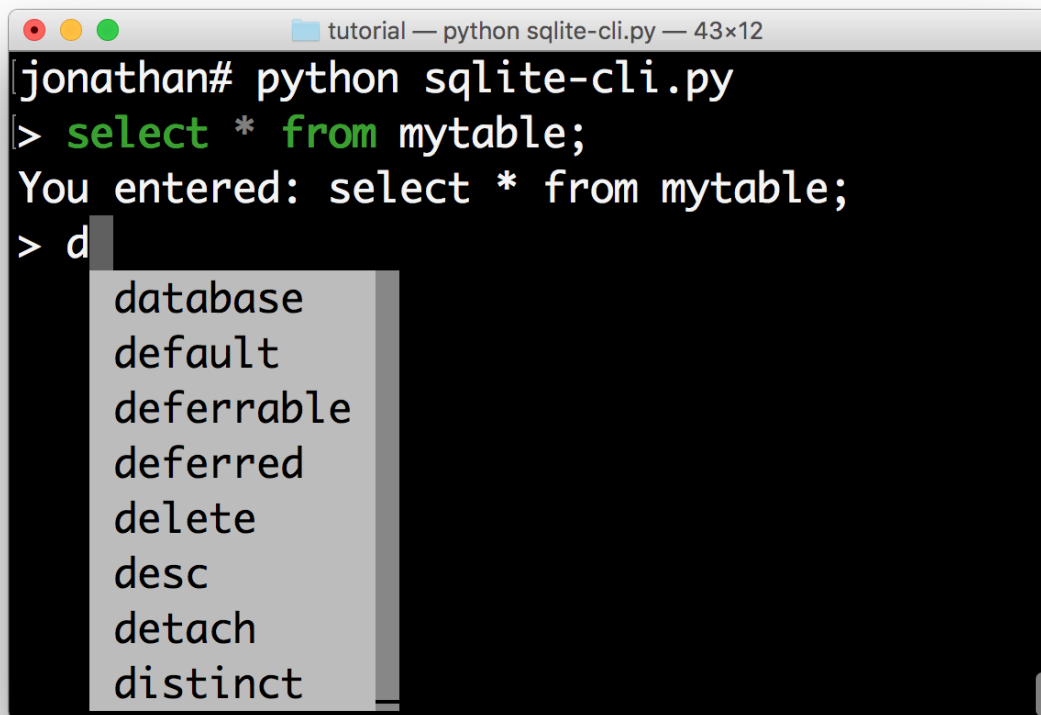

```

tutorial — python sqlite-cli.py — 43x12
jonathan# python sqlite-cli.py
> select * from mytable;
You entered: select * from mytable;
> d
database
default
deferrable
deferred
delete
desc
detach
distinct

```

In about 30 lines of code we got ourselves an auto completing, syntax highlighting REPL. Let's make it even better.

Styling the menus

If we want, we can now change the colors of the completion menu. This is possible by creating a *Style* instance and passing it to the *prompt()* function.

```

from prompt_toolkit import PromptSession
from prompt_toolkit.completion import WordCompleter
from prompt_toolkit.lexers import PygmentsLexer
from prompt_toolkit.styles import Style
from pygments.lexers.sql import SqlLexer

sql_completer = WordCompleter([
    'abort', 'action', 'add', 'after', 'all', 'alter', 'analyze', 'and',
    'as', 'asc', 'attach', 'autoincrement', 'before', 'begin', 'between',
    'by', 'cascade', 'case', 'cast', 'check', 'collate', 'column',
    'commit', 'conflict', 'constraint', 'create', 'cross', 'current_date',
    'current_time', 'current_timestamp', 'database', 'default',
    'deferrable', 'deferred', 'delete', 'desc', 'detach', 'distinct',
    'drop', 'each', 'else', 'end', 'escape', 'except', 'exclusive',
    'exists', 'explain', 'fail', 'for', 'foreign', 'from', 'full', 'glob',
    'group', 'having', 'if', 'ignore', 'immediate', 'in', 'index',

```

(continues on next page)

(continued from previous page)


```
'indexed', 'initially', 'inner', 'insert', 'instead', 'intersect',
'into', 'is', 'isnull', 'join', 'key', 'left', 'like', 'limit',
'match', 'natural', 'no', 'not', 'notnull', 'null', 'of', 'offset',
'on', 'or', 'order', 'outer', 'plan', 'pragma', 'primary', 'query',
'raise', 'recursive', 'references', 'regexp', 'reindex', 'release',
'rename', 'replace', 'restrict', 'right', 'rollback', 'row',
'savepoint', 'select', 'set', 'table', 'temp', 'temporary', 'then',
'to', 'transaction', 'trigger', 'union', 'unique', 'update', 'using',
'vacuum', 'values', 'view', 'virtual', 'when', 'where', 'with',
'without'], ignore_case=True)

style = Style.from_dict({
    'completion-menu.completion': 'bg:#008888 #ffffff',
    'completion-menu.completion.current': 'bg:#00aaaa #000000',
    'scrollbar.background': 'bg:#88aaaa',
    'scrollbar.button': 'bg:#222222',
})

def main():
    session = PromptSession(
        lexer=PygmentsLexer(SqlLexer), completer=sql_completer, style=style)

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
    print('GoodBye!')

if __name__ == '__main__':
    main()
```

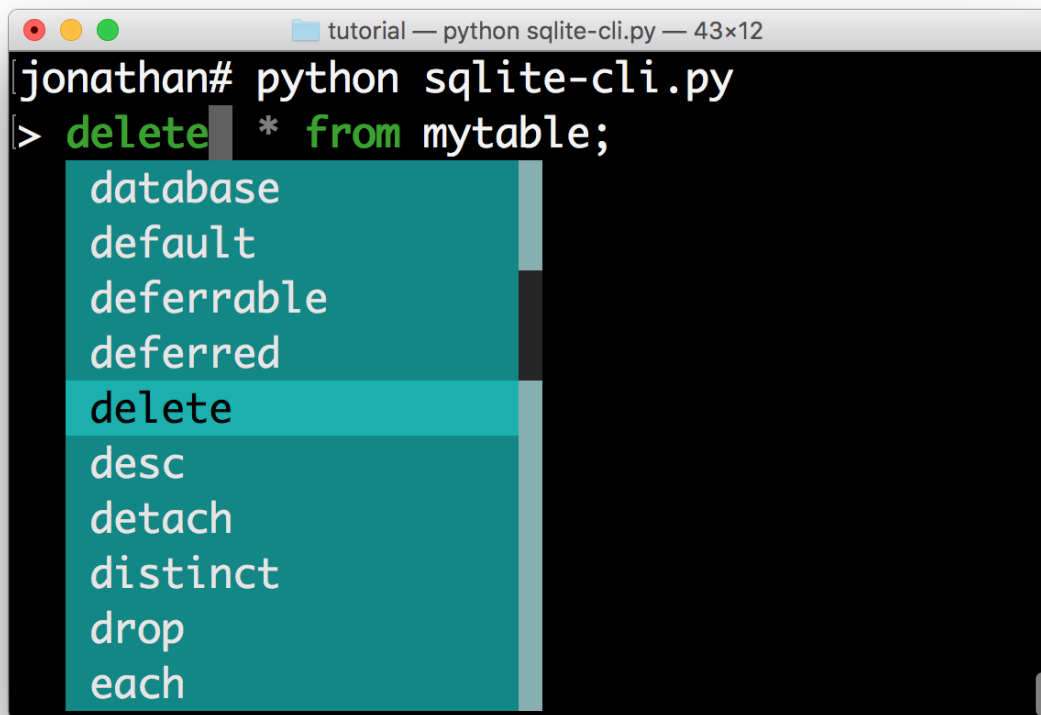

```

tutorial — python sqlite-cli.py — 43x12
jonathan# python sqlite-cli.py
> delete * from mytable;
database
default
deferrable
deferred
delete
desc
detach
distinct
drop
each

```

All that's left is hooking up the sqlite backend, which is left as an exercise for the reader. Just kidding... Keep reading.

Hook up Sqlite

This step is the final step to make the SQLite REPL actually work. It's time to relay the input to SQLite.

Obviously I haven't done the due diligence to deal with the errors. But it gives a good idea of how to get started.

```

#!/usr/bin/env python
import sys
import sqlite3

from prompt_toolkit import PromptSession
from prompt_toolkit.completion import WordCompleter
from prompt_toolkit.lexers import PygmentsLexer
from prompt_toolkit.styles import Style
from pygments.lexers.sql import SqlLexer

sql_completer = WordCompleter([
    'abort', 'action', 'add', 'after', 'all', 'alter', 'analyze', 'and',
    'as', 'asc', 'attach', 'autoincrement', 'before', 'begin', 'between',
    'by', 'cascade', 'case', 'cast', 'check', 'collate', 'column',
    'commit', 'conflict', 'constraint', 'create', 'cross', 'current_date',
    'current_time', 'current_timestamp', 'database', 'default',

```

(continues on next page)

(continued from previous page)

```

'defferrable', 'deferred', 'delete', 'desc', 'detach', 'distinct',
'drop', 'each', 'else', 'end', 'escape', 'except', 'exclusive',
'exists', 'explain', 'fail', 'for', 'foreign', 'from', 'full', 'glob',
'group', 'having', 'if', 'ignore', 'immediate', 'in', 'index',
'indexed', 'initially', 'inner', 'insert', 'instead', 'intersect',
'into', 'is', 'isnull', 'join', 'key', 'left', 'like', 'limit',
'match', 'natural', 'no', 'not', 'notnull', 'null', 'of', 'offset',
'on', 'or', 'order', 'outer', 'plan', 'pragma', 'primary', 'query',
'raise', 'recursive', 'references', 'regexp', 'reindex', 'release',
'rename', 'replace', 'restrict', 'right', 'rollback', 'row',
'savepoint', 'select', 'set', 'table', 'temp', 'temporary', 'then',
'to', 'transaction', 'trigger', 'union', 'unique', 'update', 'using',
'vacuum', 'values', 'view', 'virtual', 'when', 'where', 'with',
'without'], ignore_case=True)

style = Style.from_dict({
    'completion-menu.completion': 'bg:#008888 #ffffff',
    'completion-menu.completion.current': 'bg:#00aaaa #000000',
    'scrollbar.background': 'bg:#88aaaa',
    'scrollbar.button': 'bg:#222222',
})

def main(database):
    connection = sqlite3.connect(database)
    session = PromptSession(
        lexer=PygmentsLexer(SqlLexer), completer=sql_completer, style=style)

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue # Control-C pressed. Try again.
        except EOFError:
            break # Control-D pressed.

        with connection:
            try:
                messages = connection.execute(text)
            except Exception as e:
                print(repr(e))
            else:
                for message in messages:
                    print(message)

    print('GoodBye!')


if __name__ == '__main__':
    if len(sys.argv) < 2:
        db = ':memory:'
    else:
        db = sys.argv[1]

```

(continues on next page)

(continued from previous page)

```
main(db)
```

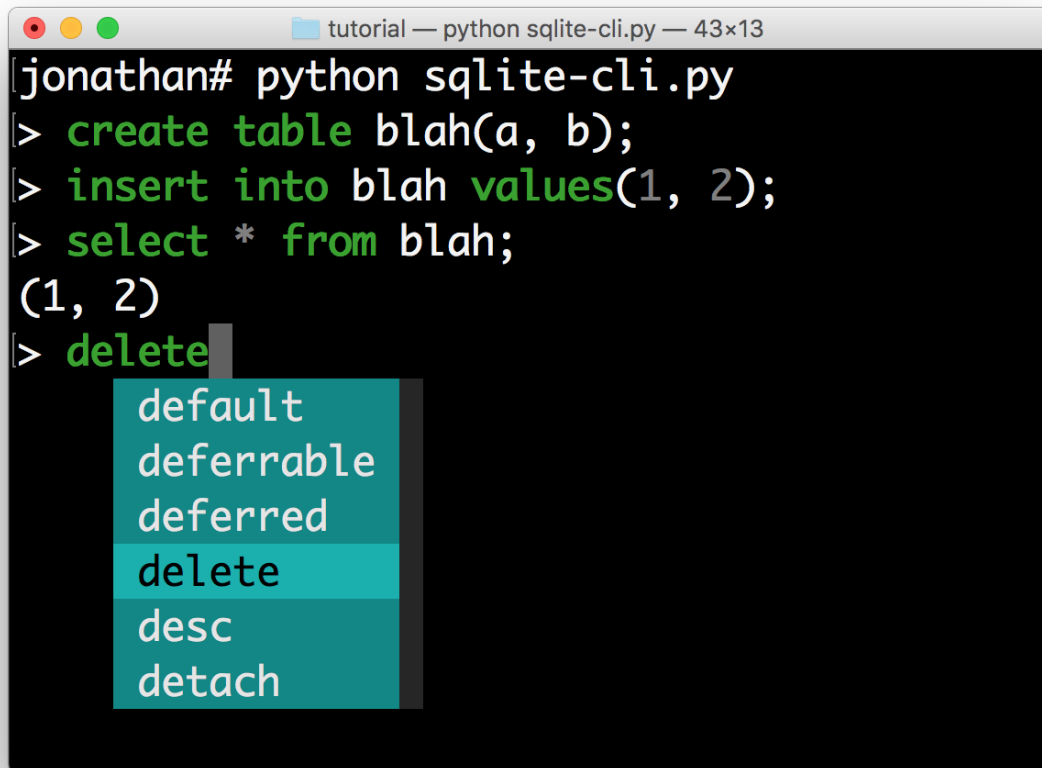

```
jonathan# python sqlite-cli.py
> create table blah(a, b);
> insert into blah values(1, 2);
> select * from blah;
(1, 2)
> delete
  default
  deferrable
  deferred
  delete
  desc
  detach
```

I hope that gives an idea of how to get started on building command line interfaces.

The End.

3.10 Advanced topics

3.10.1 More about key bindings

This page contains a few additional notes about key bindings.

Key bindings can be defined as follows by creating a *KeyBindings* instance:

```
from prompt_toolkit.key_binding import KeyBindings

bindings = KeyBindings()

@bindings.add('a')
def _(event):
```

(continues on next page)

(continued from previous page)

```
" Do something if 'a' has been pressed. "  
...  
  
@bindings.add('c-t')  
def _(event):  
    " Do something if Control-T has been pressed. "  
    ...
```

Note: `c-q` (control-q) and `c-s` (control-s) are often captured by the terminal, because they were used traditionally for software flow control. When this is enabled, the application will automatically freeze when `c-s` is pressed, until `c-q` is pressed. It won't be possible to bind these keys.

In order to disable this, execute the following command in your shell, or even add it to your `.bashrc`.

```
stty -ixon
```

Key bindings can even consist of a sequence of multiple keys. The binding is only triggered when all the keys in this sequence are pressed.

```
@bindings.add('a', 'b')  
def _(event):  
    " Do something if 'a' is pressed and then 'b' is pressed. "  
    ...
```

If the user presses only *a*, then nothing will happen until either a second key (like *b*) has been pressed or until the timeout expires (see later).

List of special keys

Besides literal characters, any of the following keys can be used in a key binding:

Name	Possible keys
Escape Shift + escape	escape s-escape
Arrows	left, right, up, down
Navigation	home, end, delete, pageup, pagedown, insert
Control+letter	c-a, c-b, c-c, c-d, c-e, c-f, c-g, c-h, c-i, c-j, c-k, c-l, c-m, c-n, c-o, c-p, c-q, c-r, c-s, c-t, c-u, c-v, c-w, c-x, c-y, c-z
Control + number	c-1, c-2, c-3, c-4, c-5, c-6, c-7, c-8, c-9, c-0
Control + arrow	c-left, c-right, c-up, c-down
Other control keys	c-@, c-\, c-], c-^, c-_, c-delete
Shift + arrow	s-left, s-right, s-up, s-down
Control + Shift + arrow	c-s-left, c-s-right, c-s-up, c-s-down
Other shift keys	s-delete, s-tab
F-keys	f1, f2, f3, f4, f5, f6, f7, f8, f9, f10, f11, f12, f13, f14, f15, f16, f17, f18, f19, f20, f21, f22, f23, f24

There are a couple of useful aliases as well:

c-h	backspace
c-@	c-space
c-m	enter
c-i	tab

Note: Note that the supported keys are limited to what typical VT100 terminals offer. Binding c-7 (control + number 7) for instance is not supported.

Binding alt+something, option+something or meta+something

Vt100 terminals translate the alt key into a leading escape key. For instance, in order to handle alt-f, we have to handle escape + f. Notice that we receive this as two individual keys. This means that it's exactly the same as first typing escape and then typing f. Something this alt-key is also known as option or meta.

In code that looks as follows:

```
@bindings.add('escape', 'f')
def _(event):
    " Do something if alt-f or meta-f have been pressed. "
```

Wildcards

Sometimes you want to catch any key that follows after a certain key stroke. This is possible by binding the ‘<any>’ key:

```
@bindings.add('a', '<any>')
def _(event):
    ...
```

This will handle *aa*, *ab*, *ac*, etcetera. The key binding can check the *event* object for which keys exactly have been pressed.

Attaching a filter (condition)

In order to enable a key binding according to a certain condition, we have to pass it a *Filter*, usually a *Condition* instance. (*Read more about filters.*)

```
from prompt_toolkit.filters import Condition

@Condition
def is_active():
    " Only activate key binding on the second half of each minute. "
    return datetime.datetime.now().second > 30

@bindings.add('c-t', filter=is_active)
def _(event):
    # ...
    pass
```

The key binding will be ignored when this condition is not satisfied.

ConditionalKeyBindings: Disabling a set of key bindings

Sometimes you want to enable or disable a whole set of key bindings according to a certain condition. This is possible by wrapping it in a *ConditionalKeyBindings* object.

```
from prompt_toolkit.key_binding import ConditionalKeyBindings

@Condition
def is_active():
    " Only activate key binding on the second half of each minute. "
    return datetime.datetime.now().second > 30

bindings = ConditionalKeyBindings(
    key_bindings=my_bindings,
    filter=is_active)
```

If the condition is not satisfied, all the key bindings in *my_bindings* above will be ignored.

Merging key bindings

Sometimes you have different parts of your application generate a collection of key bindings. It is possible to merge them together through the `merge_key_bindings()` function. This is preferred above passing a `KeyBindings` object around and having everyone populate it.

```
from prompt_toolkit.key_binding import merge_key_bindings

bindings = merge_key_bindings([
    bindings1,
    bindings2,
])
```

Eager

Usually not required, but if ever you have to override an existing key binding, the *eager* flag can be useful.

Suppose that there is already an active binding for *ab* and you'd like to add a second binding that only handles *a*. When the user presses only *a*, prompt_toolkit has to wait for the next key press in order to know which handler to call.

By passing the *eager* flag to this second binding, we are actually saying that prompt_toolkit shouldn't wait for longer matches when all the keys in this key binding are matched. So, if *a* has been pressed, this second binding will be called, even if there's an active *ab* binding.

```
@bindings.add('a', 'b')
def binding_1(event):
    ...

@bindings.add('a', eager=True)
def binding_2(event):
    ...
```

This is mainly useful in order to conditionally override another binding.

Asyncio coroutines

Key binding handlers can be asyncio coroutines.

```
from prompt_toolkit.application import in_terminal

@bindings.add('x')
async def print_hello(event):
    """
    Pressing 'x' will print 5 times "hello" in the background above the
    prompt.
    """
    for i in range(5):
        # Print hello above the current prompt.
        async with in_terminal():
            print('hello')

        # Sleep, but allow further input editing in the meantime.
        await asyncio.sleep(1)
```

If the user accepts the input on the prompt, while this coroutine is not yet finished, an `asyncio.CancelledError` exception will be thrown in this coroutine.

Timeouts

There are two timeout settings that effect the handling of keys.

- `Application.ttimeoutlen`: Like Vim's `ttimeoutlen` option. When to flush the input (For flushing escape keys.) This is important on terminals that use vt100 input. We can't distinguish the escape key from for instance the left-arrow key, if we don't know what follows after "x1b". This little timer will consider "x1b" to be escape if nothing did follow in this time span. This seems to work like the `ttimeoutlen` option in Vim.
- `KeyProcessor.timeoutlen`: like Vim's `timeoutlen` option. This can be `None` or a float. For instance, suppose that we have a key binding AB and a second key binding A. If the user presses A and then waits, we don't handle this binding yet (unless it was marked 'eager'), because we don't know what will follow. This timeout is the maximum amount of time that we wait until we call the handlers anyway. Pass `None` to disable this timeout.

Recording macros

Both Emacs and Vi mode allow macro recording. By default, all key presses are recorded during a macro, but it is possible to exclude certain keys by setting the `record_in_macro` parameter to `False`:

```
@bindings.add('c-t', record_in_macro=False)
def _(event):
    # ...
    pass
```

Creating new Vi text objects and operators

We tried very hard to ship prompt_toolkit with as many as possible Vi text objects and operators, so that text editing feels as natural as possible to Vi users.

If you wish to create a new text object or key binding, that is actually possible. Check the `custom-vi-operator-and-text-object.py` example for more information.

Handling SIGINT

The SIGINT Unix signal can be handled by binding `<sigint>`. For instance:

```
@bindings.add('<sigint>')
def _(event):
    # ...
    pass
```

This will handle a SIGINT that was sent by an external application into the process. Handling control-c should be done by binding `c-c`. (The terminal input is set to raw mode, which means that a `c-c` won't be translated into a SIGINT.)

For a `PromptSession`, there is a default binding for `<sigint>` that corresponds to `c-c`: it will exit the prompt, raising a `KeyboardInterrupt` exception.

Processing *.inputrc*

GNU readline can be configured using an *.inputrc* configuration file. This file contains key bindings as well as certain settings. Right now, prompt_toolkit doesn't support *.inputrc*, but it should be possible in the future.

3.10.2 More about styling

This page will attempt to explain in more detail how to use styling in prompt_toolkit.

To some extent, it is very similar to how [Pygments](#) styling works.

Style strings

Many user interface controls, like [Window](#) accept a *style* argument which can be used to pass the formatting as a string. For instance, we can select a foreground color:

- "fg:ansired" (ANSI color palette)
- "fg:ansiblue" (ANSI color palette)
- "fg:#ffaa33" (hexadecimal notation)
- "fg:darkred" (named color)

Or a background color:

- "bg:ansired" (ANSI color palette)
- "bg:#ffaa33" (hexadecimal notation)

Or we can add one of the following flags:

- "bold"
- "italic"
- "underline"
- "blink"
- "reverse" (reverse foreground and background on the terminal.)
- "hidden"

Or their negative variants:

- "nobold"
- "noitalic"
- "nounderline"
- "noblink"
- "noreverse"
- "nohidden"

All of these formatting options can be combined as well:

- "fg:ansiyellow bg:black bold underline"

The style string can be given to any user control directly, or to a [Container](#) object from where it will propagate to all its children. A style defined by a parent user control can be overridden by any of its children. The parent can for instance say `style="bold underline"` where a child overrides this style partly by specifying `style="nobold bg:ansired"`.

Note: These styles are actually compatible with [Pygments](#) styles, with additional support for *reverse* and *blink*. Further, we ignore flags like *roman*, *sans*, *mono* and *border*.

The following ANSI colors are available (both for foreground and background):

```
# Low intensity, dark. (One or two components 0x80, the other 0x00.)
ansiblack, ansired, ansigreen, ansiyellow, ansiblue
ansimagenta, 'ansicyan, ansigray

# High intensity, bright.
ansibrightblack, ansibrightred, ansibrightgreen, ansibrightyellow
ansibrightblue, ansibrightmagenta, ansibrightcyan, ansiwhite
```

In order to know which styles are actually used in an application, it is possible to call `get_used_style_strings()`, when the application is done.

Class names

Like we do for web design, it is not a good habit to specify all styling inline. Instead, we can attach class names to UI controls and have a style sheet that refers to these class names. The [Style](#) can be passed as an argument to the [Application](#).

```
from prompt_toolkit.layout import VSplit, Window
from prompt_toolkit.styles import Style

layout = VSplit([
    Window(BufferControl(...), style='class:left'),
    HSplit([
        Window(BufferControl(...), style='class:top'),
        Window(BufferControl(...), style='class:bottom'),
    ], style='class:right')
])

style = Style([
    ('left', 'bg:ansired'),
    ('top', 'fg:#00aaaa'),
    ('bottom', 'underline bold'),
])
```

It is possible to add multiple class names to an element. That way we'll combine the styling for these class names. Multiple classes can be passed by using a comma separated list, or by using the `class:` prefix twice.

```
Window(BufferControl(...), style='class:left,bottom'),
Window(BufferControl(...), style='class:left class:bottom'),
```

It is possible to combine class names and inline styling. The order in which the class names and inline styling is specified determines the order of priority. In the following example for instance, we'll take first the style of the “header” class, and then override that with a red background color.

```
Window(BufferControl(...), style='class:header bg:red'),
```

Dot notation in class names

The dot operator has a special meaning in a class name. If we write: `style="class:a.b.c"`, then this will actually expand to the following: `style="class:a class:a.b class:a.b.c"`.

This is mainly added for `Pygments` lexers, which specify “Tokens” like this, but it’s useful in other situations as well.

Multiple classes in a style sheet

A style sheet can be more complex as well. We can for instance specify two class names. The following will underline the left part within the header, or whatever has both the class “left” and the class “header” (the order doesn’t matter).

```
style = Style([
    ('header left', 'underline'),
])
```

If you have a dotted class, then it’s required to specify the whole path in the style sheet (just typing `c` or `b.c` doesn’t work if the class is `a.b.c`):

```
style = Style([
    ('a.b.c', 'underline'),
])
```

It is possible to combine this:

```
style = Style([
    ('header body left.text', 'underline'),
])
```

Evaluation order of rules in a style sheet

The style is determined as follows:

- First, we concatenate all the style strings from the root control through all the parents to the child in one big string. (Things at the right take precedence anyway.)

E.g: `class:body bg:#aaaaaa #000000 class:header.focused class:left.text.highlighted underline`

- Then we go through this style from left to right, starting from the default style. Inline styling is applied directly.

If we come across a class name, then we generate all combinations of the class names that we collected so far (this one and all class names to the left), and for each combination which includes the new class name, we look for matching rules in our style sheet. All these rules are then applied (later rules have higher priority).

If we find a dotted class name, this will be expanded in the individual names (like `class:left class:left.text class:left.text.highlighted`), and all these are applied like any class names.

- Then this final style is applied to this user interface element.

Using a dictionary as a style sheet

The order of the rules in a style sheet is meaningful, so typically, we use a list of tuples to specify the style. But is also possible to use a dictionary as a style sheet. This makes sense for Python 3.6, where dictionaries remember their ordering. An `OrderedDict` works as well.

```
from prompt_toolkit.styles import Style

style = Style.from_dict({
    'header body left.text': 'underline',
})
```

Loading a style from Pygments

`Pygments` has a slightly different notation for specifying styles, because it maps styling to Pygments “Tokens”. A Pygments style can however be loaded and used as follows:

```
from prompt_toolkit.styles.pygments import style_from_pygments_cls
from pygments.styles import get_style_by_name

style = style_from_pygments_cls(get_style_by_name('monokai'))
```

Merging styles together

Multiple `Style` objects can be merged together as follows:

```
from prompt_toolkit.styles import merge_styles

style = merge_styles([
    style1,
    style2,
    style3
])
```

Color depths

There are four different levels of color depths available:

1 bit	Black and white	<code>ColorDepth.DEPTH_1_BIT</code>	<code>ColorDepth.MONOCHROME</code>
4 bit	ANSI colors	<code>ColorDepth.DEPTH_4_BIT</code>	<code>ColorDepth.ANSI_COLORS_ONLY</code>
8 bit	256 colors	<code>ColorDepth.DEPTH_8_BIT</code>	<code>ColorDepth.DEFAULT</code>
24 bit	True colors	<code>ColorDepth.DEPTH_24_BIT</code>	<code>ColorDepth.TRUE_COLOR</code>

By default, 256 colors are used, because this is what most terminals support these days. If the `TERM` environment variable is set to `linux` or `eterm-color`, then only ANSI colors are used, because of these terminals. The 24 bit true color output needs to be enabled explicitly. When 4 bit color output is chosen, all colors will be mapped to the closest ANSI color.

Setting the default color depth for any `prompt_toolkit` application can be done by setting the `PROMPT_TOOLKIT_COLOR_DEPTH` environment variable. You could for instance copy the following into your `.bashrc` file.

```
# export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_1_BIT
export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_4_BIT
# export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_8_BIT
# export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_24_BIT
```

An application can also decide to set the color depth manually by passing a *ColorDepth* value to the *Application* object:

```
from prompt_toolkit.output.color_depth import ColorDepth

app = Application(
    color_depth=ColorDepth.ANSI_COLORS_ONLY,
    # ...
)
```

Style transformations

Prompt_toolkit supports a way to apply certain transformations to the styles near the end of the rendering pipeline. This can be used for instance to change certain colors to improve the rendering in some terminals.

One useful example is the *AdjustBrightnessStyleTransformation* class, which takes *min_brightness* and *max_brightness* as arguments which by default have 0.0 and 1.0 as values. In the following code snippet, we increase the minimum brightness to improve rendering on terminals with a dark background.

```
from prompt_toolkit.styles import AdjustBrightnessStyleTransformation

app = Application(
    style_transformation=AdjustBrightnessStyleTransformation(
        min_brightness=0.5, # Increase the minimum brightness.
        max_brightness=1.0,
    )
    # ...
)
```

3.10.3 Filters

Many places in *prompt_toolkit* require a boolean value that can change over time. For instance:

- to specify whether a part of the layout needs to be visible or not;
- or to decide whether a certain key binding needs to be active or not;
- or the *wrap_lines* option of *BufferControl*;
- etcetera.

These booleans are often dynamic and can change at runtime. For instance, the search toolbar should only be visible when the user is actually searching (when the search buffer has the focus). The *wrap_lines* option could be changed with a certain key binding. And that key binding could only work when the default buffer got the focus.

In *prompt_toolkit*, we decided to reduce the amount of state in the whole framework, and apply a simple kind of reactive programming to describe the flow of these booleans as expressions. (It's one-way only: if a key binding needs to know whether it's active or not, it can follow this flow by evaluating an expression.)

The (abstract) base class is *Filter*, which wraps an expression that takes no input and evaluates to a boolean. Getting the state of a filter is done by simply calling it.

An example

The most obvious way to create such a *Filter* instance is by creating a *Condition* instance from a function. For instance, the following condition will evaluate to True when the user is searching:

```
from prompt_toolkit.application.current import get_app
from prompt_toolkit.filters import Condition

is_searching = Condition(lambda: get_app().is_searching)
```

A different way of writing this, is by using the decorator syntax:

```
from prompt_toolkit.application.current import get_app
from prompt_toolkit.filters import Condition

@Condition
def is_searching():
    return get_app().is_searching
```

This filter can then be used in a key binding, like in the following snippet:

```
from prompt_toolkit.key_binding import KeyBindings

kb = KeyBindings()

@kb.add('c-t', filter=is_searching)
def _(event):
    # Do, something, but only when searching.
    pass
```

If we want to know the boolean value of this filter, we have to call it like a function:

```
print(is_searching())
```

Built-in filters

There are many built-in filters, ready to use. All of them have a lowercase name, because they represent the wrapped function underneath, and can be called as a function.

- `has_arg`
- `has_completions`
- `has_focus`
- `buffer_has_focus`
- `has_selection`
- `has_validation_error`
- `is_aborting`
- `is_done`

- `is_read_only`
- `is_multiline`
- `renderer_height_is_known`
- `in_editing_mode`
- `in_paste_mode`
- `vi_mode`
- `vi_navigation_mode`
- `vi_insert_mode`
- `vi_insert_multiple_mode`
- `vi_replace_mode`
- `vi_selection_mode`
- `vi_waiting_for_text_object_mode`
- `vi_digraph_mode`
- `emacs_mode`
- `emacs_insert_mode`
- `emacs_selection_mode`
- `is_searching`
- `control_is_searchable`
- `vi_search_direction_reversed`

Combining filters

Filters can be chained with the `&` (AND) and `|` (OR) operators and negated with the `~` (negation) operator.

Some examples:

```
from prompt_toolkit.key_binding import KeyBindings
from prompt_toolkit.filters import has_selection, has_search

kb = KeyBindings()

@kb.add('c-t', filter=~is_searching)
def _(event):
    " Do something, but not while searching. "
    pass

@kb.add('c-t', filter=has_search | has_selection)
def _(event):
    " Do something, but only when searching or when there is a selection. "
    pass
```

to_filter

Finally, in many situations you want your code to expose an API that is able to deal with both booleans as well as filters. For instance, when for most users a boolean works fine because they don't need to change the value over time, while some advanced users want to be able this value to a certain setting or event that does changes over time.

In order to handle both use cases, there is a utility called `to_filter()`.

This is a function that takes either a boolean or an actual `Filter` instance, and always returns a `Filter`.

```
from prompt_toolkit.filters.utils import to_filter

# In each of the following three examples, 'f' will be a `Filter`
# instance.
f = to_filter(True)
f = to_filter(False)
f = to_filter(Condition(lambda: True))
f = to_filter(has_search | has_selection)
```

3.10.4 The rendering flow

Understanding the rendering flow is important for understanding how `Container` and `UIControl` objects interact. We will demonstrate it by explaining the flow around a `BufferControl`.

Note: A `BufferControl` is a `UIControl` for displaying the content of a `Buffer`. A buffer is the object that holds any editable region of text. Like all controls, it has to be wrapped into a `Window`.

Let's take the following code:

```
from prompt_toolkit.enums import DEFAULT_BUFFER
from prompt_toolkit.layout.containers import Window
from prompt_toolkit.layout.controls import BufferControl
from prompt_toolkit.buffer import Buffer

b = Buffer(name=DEFAULT_BUFFER)
Window(content=BufferControl(buffer=b))
```

What happens when a `Renderer` objects wants a `Container` to be rendered on a certain `Screen`?

The visualisation happens in several steps:

1. The `Renderer` calls the `write_to_screen()` method of a `Container`. This is a request to paint the layout in a rectangle of a certain size.

The `Window` object then requests the `UIControl` to create a `UIContent` instance (by calling `create_content()`). The user control receives the dimensions of the window, but can still decide to create more or less content.

Inside the `create_content()` method of `UIControl`, there are several steps:

2. First, the buffer's text is passed to the `lex_document()` method of a `Lexer`. This returns a function which for a given line number, returns a "formatted text list" for that line (that's a list of `(style_string, text)` tuples).
3. This list is passed through a list of `Processor` objects. Each processor can do a transformation for each line. (For instance, they can insert or replace some text, highlight the selection or search string, etc...)

4. The `UIControl` returns a `UIContent` instance which generates such a token lists for each lines.

The `Window` receives the `UIContent` and then:

5. It calculates the horizontal and vertical scrolling, if applicable (if the content would take more space than what is available).
6. The content is copied to the correct absolute position `Screen`, as requested by the `Renderer`. While doing this, the `Window` can possible wrap the lines, if line wrapping was configured.

Note that this process is lazy: if a certain line is not displayed in the `Window`, then it is not requested from the `UIContent`. And from there, the line is not passed through the processors or even asked from the `Lexer`.

3.10.5 Running on top of the `asyncio` event loop

Note: New in prompt_toolkit 3.0. (In prompt_toolkit 2.0 this was possible using a work-around).

Prompt_toolkit 3.0 uses `asyncio` natively. Calling `Application.run()` will automatically run the `asyncio` event loop.

If however you want to run a prompt_toolkit `Application` within an `asyncio` environment, you have to call the `run_async` method, like this:

```
from prompt_toolkit.application import Application

async def main():
    # Define application.
    application = Application(
        ...
    )

    result = await application.run_async()
    print(result)

asyncio.get_event_loop().run_until_complete(main())
```

3.10.6 Unit testing

Testing user interfaces is not always obvious. Here are a few tricks for testing prompt_toolkit applications.

PosixPipeInput and DummyOutput

During the creation of a prompt_toolkit `Application`, we can specify what input and output device to be used. By default, these are output objects that correspond with `sys.stdin` and `sys.stdout`. In unit tests however, we want to replace these.

- For the input, we want a “pipe input”. This is an input device, in which we can programatically send some input. It can be created with `create_pipe_input()`, and that return either a `PosixPipeInput` or a `Win32PipeInput` depending on the platform.
- For the output, we want a `DummyOutput`. This is an output device that doesn’t render anything. We don’t want to render anything to `sys.stdout` in the unit tests.

Note: Typically, we don't want to test the bytes that are written to `sys.stdout`, because these can change any time when the rendering algorithm changes, and are not so meaningful anyway. Instead, we want to test the return value from the `Application` or test how data structures (like text buffers) change over time.

So we programmatically feed some input to the input pipe, have the key bindings process the input and then test what comes out of it.

In the following example we use a `PromptSession`, but the same works for any `Application`.

```
from prompt_toolkit.shortcuts import PromptSession
from prompt_toolkit.input import create_pipe_input
from prompt_toolkit.output import DummyOutput

def test_prompt_session():
    inp = create_pipe_input()

    try:
        inp.send_text("hello\n")
        session = PromptSession(
            input=inp,
            output=DummyOutput(),
        )

        result = session.prompt()
    finally:
        inp.close()

    assert result == "hello"
```

In the above example, don't forget to send the `\n` character to accept the prompt, otherwise the `Application` will wait forever for some more input to receive.

Using an AppSession

Sometimes it's not convenient to pass input or output objects to the `Application`, and in some situations it's not even possible at all. This happens when these parameters are not passed down the call stack, through all function calls.

An easy way to specify which input/output to use for all applications, is by creating an `AppSession` with this input/output and running all code in that `AppSession`. This way, we don't need to inject it into every `Application` or `print_formatted_text()` call.

Here is an example where we use `create_app_session()`:

```
from prompt_toolkit.application import create_app_session
from prompt_toolkit.shortcuts import print_formatted_text
from prompt_toolkit.output import DummyOutput

def test_something():
    with create_app_session(output=DummyOutput()):
        ...
        print_formatted_text('Hello world')
        ...
```

Pytest fixtures

In order to get rid of the boilerplate of creating the input, the *DummyOutput*, and the *AppSession*, we create a single fixture that does it for every test. Something like this:

```
import pytest
from prompt_toolkit.application import create_app_session
from prompt_toolkit.input import create_pipe_input
from prompt_toolkit.output import DummyOutput

@pytest.fixture(autouse=True, scope="function")
def mock_input():
    pipe_input = create_pipe_input()
    try:
        with create_app_session(input=pipe_input, output=DummyOutput()):
            yield pipe_input
    finally:
        pipe_input.close()
```

Type checking

Prompt_toolkit 3.0 is fully type annotated. This means that if a prompt_toolkit application is typed too, it can be verified with mypy. This is complementary to unit tests, but also great for testing for correctness.

3.10.7 Input hooks

Input hooks are a tool for inserting an external event loop into the prompt_toolkit event loop, so that the other loop can run as long as prompt_toolkit (actually asyncio) is idle. This is used in applications like *IPython*, so that GUI toolkits can display their windows while we wait at the prompt for user input.

As a consequence, we will “trampoline” back and forth between two event loops.

Note: This will use a *SelectorEventLoop*, not the *ProactorEventLoop* (on Windows) due to the way the implementation works (contributions are welcome to make that work).

```
from prompt_toolkit.eventloop.inpuhook import set_eventloop_with_inpuhook

def inpuhook(inpuhook_context):
    # At this point, we run the other loop. This loop is supposed to run
    # until either `inpuhook_context.fileno` becomes ready for reading or
    # `inpuhook_context.input_is_ready()` returns True.

    # A good way is to register this file descriptor in this other event
    # loop with a callback that stops this loop when this FD becomes ready.
    # There is no need to actually read anything from the FD.

    while True:
        ...

set_eventloop_with_inpuhook(inpuhook)
```


(continues on next page)

(continued from previous page)

```
# Any asyncio code at this point will now use this new loop, with input
# hook installed.
```

3.10.8 Architecture

TODO: this is a little outdated.

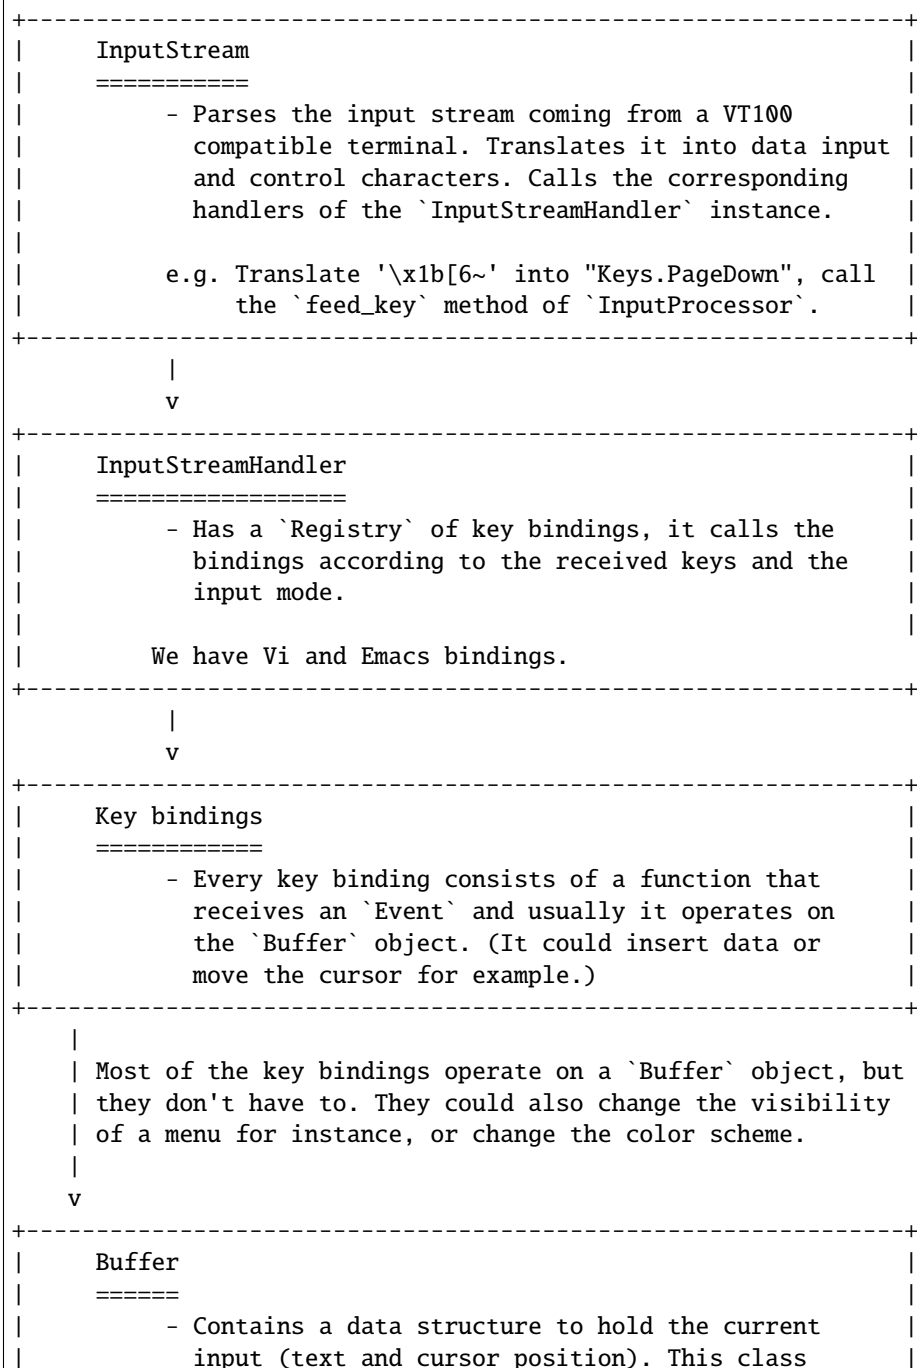

(continues on next page)

(continued from previous page)

<pre> implements all text manipulations and cursor movements (Like e.g. cursor_forward, insert_char or delete_word.) +-----+ Document (text, cursor_position) ===== Accessed as the `document` property of the `Buffer` class. This is a wrapper around the text and cursor position, and contains methods for querying this data , e.g. to give the text before the cursor. +-----+ +-----+ </pre>	
<pre> Normally after every key press, the output will be rendered again. This happens in the event loop of the `Application` where `Renderer.render` is called. v +-----+ </pre>	
<pre> Layout ===== - When the renderer should redraw, the renderer asks the layout what the output should look like. - The layout operates on a `Screen` object that he received from the `Renderer` and will put the toolbars, menus, highlighted content and prompt in place. +-----+ Menus, toolbars, prompt ===== +-----+ +-----+ </pre>	
<pre> v +-----+ </pre>	
<pre> Renderer ===== - Calculates the difference between the last output and the new one and writes it to the terminal output. +-----+ </pre>	

3.10.9 The rendering pipeline

This document is an attempt to describe how prompt_toolkit applications are rendered. It's a complex but logical process that happens more or less after every key stroke. We'll go through all the steps from the point where the user hits a key, until the character appears on the screen.

Waiting for user input

Most of the time when a prompt_toolkit application is running, it is idle. It's sitting in the event loop, waiting for some I/O to happen. The most important kind of I/O we're waiting for is user input. So, within the event loop, we have one file descriptor that represents the input device from where we receive key presses. The details are a little different between operating systems, but it comes down to a selector (like `select` or `epoll`) which waits for one or more file descriptor. The event loop is then responsible for calling the appropriate feedback when one of the file descriptors becomes ready.

It is like that when the user presses a key: the input device becomes ready for reading, and the appropriate callback is called. This is the `read_from_input` function somewhere in `application.py`. It will read the input from the `Input` object, by calling `read_keys()`.

Reading the user input

The actual reading is also operating system dependent. For instance, on a Linux machine with a vt100 terminal, we read the input from the pseudo terminal device, by calling `os.read`. This however returns a sequence of bytes. There are two difficulties:

- The input could be UTF-8 encoded, and there is always the possibility that we receive only a portion of a multi-byte character.
- vt100 key presses consist of multiple characters. For instance the “left arrow” would generate something like `\x1b[D`. It could be that when we read this input stream, that at some point we only get the first part of such a key press, and we have to wait for the rest to arrive.

Both problems are implemented using state machines.

- The UTF-8 problem is solved using `codecs.getincrementaldecoder`, which is an object in which we can feed the incoming bytes, and it will only return the complete UTF-8 characters that we have so far. The rest is buffered for the next read operation.
- Vt100 parsing is solved by the `Vt100Parser` state machine. The state machine itself is implemented using a generator. We feed the incoming characters to the generator, and it will call the appropriate callback for key presses once they arrive. One thing here to keep in mind is that the characters for some key presses are a prefix of other key presses, like for instance, escape (`\x1b`) is a prefix of the left arrow key (`\x1b[D`). So for those, we don't know what key is pressed until more data arrives or when the input is flushed because of a timeout.

For Windows systems, it's a little different. Here we use Win32 syscalls for reading the console input.

Processing the key presses

The `Key` objects that we receive are then passed to the `KeyProcessor` for matching against the currently registered and active key bindings.

This is another state machine, because key bindings are linked to a sequence of key presses. We cannot call the handler until all of these key presses arrive and until we're sure that this combination is not a prefix of another combination. For instance, sometimes people bind `jj` (a double `j` key press) to `esc` in Vi mode. This is convenient, but we want to make sure that pressing `j` once only, followed by a different key will still insert the `j` character as usual.

Now, there are hundreds of key bindings in `prompt_toolkit` (in `ptpython`, right now we have 585 bindings). This is mainly caused by the way that Vi key bindings are generated. In order to make this efficient, we keep a cache of handlers which match certain sequences of keys.

Of course, key bindings also have filters attached for enabling/disabling them. So, if at some point, we get a list of handlers from that cache, we still have to discard the inactive bindings. Luckily, many bindings share exactly the same filter, and we have to check every filter only once.

[Read more about key bindings ...](#)

The key handlers

Once a key sequence is matched, the handler is called. This can do things like text manipulation, changing the focus or anything else.

After the handler is called, the user interface is invalidated and rendered again.

Rendering the user interface

The rendering is pretty complex for several reasons:

- We have to compute the dimensions of all user interface elements. Sometimes they are given, but sometimes this requires calculating the size of `UIControl` objects.
- It needs to be very efficient, because it's something that happens on every single key stroke.
- We should output as little as possible on stdout in order to reduce latency on slow network connections and older terminals.

Calculating the total UI height

Unless the application is a full screen application, we have to know how much vertical space is going to be consumed. The total available width is given, but the vertical space is more dynamic. We do this by asking the root `Container` object to calculate its preferred height. If this is a `VSplit` or `HSplit` then this involves recursively querying the child objects for their preferred widths and heights and either summing it up, or taking maximum values depending on the actual layout. In the end, we get the preferred height, for which we make sure it's at least the distance from the cursor position to the bottom of the screen.

Painting to the screen

Then we create a `Screen` object. This is like a canvas on which user controls can paint their content. The `write_to_screen()` method of the root `Container` is called with the screen dimensions. This will call recursively `write_to_screen()` methods of nested child containers, each time passing smaller dimensions while we traverse what is a tree of `Container` objects.

The most inner containers are `Window` objects, they will do the actual painting of the `UIControl` to the screen. This involves line wrapping the `UIControl`'s text and maybe scrolling the content horizontally or vertically.

Rendering to stdout

Finally, when we have painted the screen, this needs to be rendered to stdout. This is done by taking the difference of the previously rendered screen and the new one. The algorithm that we have is heavily optimized to compute this difference as quickly as possible, and call the appropriate output functions of the *Output* back-end. At the end, it will position the cursor in the right place.

3.11 Reference

3.11.1 Application

```
class prompt_toolkit.application.AppSession(input: Optional[Input] = None, output: Optional[Output]
                                             = None)
```

An AppSession is an interactive session, usually connected to one terminal. Within one such session, interaction with many applications can happen, one after the other.

The input/output device is not supposed to change during one session.

Warning: Always use the *create_app_session* function to create an instance, so that it gets activated correctly.

Parameters

- **input** – Use this as a default input for all applications running in this session, unless an input is passed to the *Application* explicitly.
- **output** – Use this as a default output.

```

class prompt_toolkit.application.Application(layout: Optional[prompt_toolkit.layout.layout.Layout] =
None, style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None,
include_default_pygments_style:
Union[prompt_toolkit.filters.base.Filter, bool] = True,
style_transformation: Op-
tional[prompt_toolkit.styles.style_transformation.StyleTransformation]
= None, key_bindings: Op-
tional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]
= None, clipboard:
Optional[prompt_toolkit.clipboard.base.Clipboard] =
None, full_screen: bool = False, color_depth: Op-
tional[Union[prompt_toolkit.output.color_depth.ColorDepth,
Callable[[], Op-
tional[prompt_toolkit.output.color_depth.ColorDepth]]]]
= None, mouse_support:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
enable_page_navigation_bindings:
Optional[Union[prompt_toolkit.filters.base.Filter, bool]]
= None, paste_mode:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
editing_mode: prompt_toolkit.enums.EditingMode =
EditingMode.EMACS, erase_when_done: bool = False,
reverse_vi_search_direction:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
min_redraw_interval: Optional[Union[float, int]] =
None, max_render_postpone_time: Optional[Union[float,
int]] = 0.01, refresh_interval: Optional[float] = None,
terminal_size_polling_interval: Optional[float] = 0.5,
cursor: Op-
tional[Union[prompt_toolkit.cursor_shapes.CursorShape,
prompt_toolkit.cursor_shapes.CursorShapeConfig]] =
None, on_reset:
Optional[ApplicationEventHandler[_AppResult]] =
None, on_invalidate:
Optional[ApplicationEventHandler[_AppResult]] =
None, before_render:
Optional[ApplicationEventHandler[_AppResult]] =
None, after_render:
Optional[ApplicationEventHandler[_AppResult]] =
None, input: Optional[prompt_toolkit.input.base.Input] =
None, output:
Optional[prompt_toolkit.output.base.Output] = None)

```

The main Application class! This glues everything together.

Parameters

- **layout** – A [Layout](#) instance.
- **key_bindings** – [KeyBindingsBase](#) instance for the key bindings.
- **clipboard** – [Clipboard](#) to use.
- **full_screen** – When True, run the application on the alternate screen buffer.
- **color_depth** – Any [ColorDepth](#) value, a callable that returns a [ColorDepth](#) or *None* for default.

- **erase_when_done** – (bool) Clear the application output when it finishes.
- **reverse_vi_search_direction** – Normally, in Vi mode, a ‘/’ searches forward and a ‘?’ searches backward. In Readline mode, this is usually reversed.
- **min_redraw_interval** – Number of seconds to wait between redraws. Use this for applications where *invalidate* is called a lot. This could cause a lot of terminal output, which some terminals are not able to process.

None means that every *invalidate* will be scheduled right away (which is usually fine).

When one *invalidate* is called, but a scheduled redraw of a previous *invalidate* call has not been executed yet, nothing will happen in any case.

- **max_render_postpone_time** – When there is high CPU (a lot of other scheduled calls), postpone the rendering max x seconds. ‘0’ means: don’t postpone. ‘.5’ means: try to draw at least twice a second.
- **refresh_interval** – Automatically invalidate the UI every so many seconds. When *None* (the default), only invalidate when *invalidate* has been called.
- **terminal_size_polling_interval** – Poll the terminal size every so many seconds. Useful if the applications runs in a thread other than the main thread where SIGWINCH can’t be handled, or on Windows.

Filters:

Parameters

- **mouse_support** – (*Filter* or boolean). When True, enable mouse support.
- **paste_mode** – *Filter* or boolean.
- **editing_mode** – *EditMode*.
- **enable_page_navigation_bindings** – When *True*, enable the page navigation key bindings. These include both Emacs and Vi bindings like page-up, page-down and so on to scroll through pages. Mostly useful for creating an editor or other full screen applications. Probably, you don’t want this for the implementation of a REPL. By default, this is enabled if *full_screen* is set.

Callbacks (all of these should accept an *Application* object as input.)

Parameters

- **on_reset** – Called during reset.
- **on_invalidate** – Called when the UI has been invalidated.
- **before_render** – Called right before rendering.
- **after_render** – Called right after rendering.

I/O: (Note that the preferred way to change the input/output is by creating an *AppSession* with the required input/output objects. If you need multiple applications running at the same time, you have to create a separate *AppSession* using a *with create_app_session()*: block.

Parameters

- **input** – *Input* instance.
- **output** – *Output* instance. (Probably *Vt100_Output* or *Win32Output*.)

Usage:

```
app = Application(...) app.run()
```

```
# Or await app.run_async()
```

async cancel_and_wait_for_background_tasks() → None

Cancel all background tasks, and wait for the cancellation to be done. If any of the background tasks raised an exception, this will also propagate the exception.

(If we had nurseries like Trio, this would be the `__aexit__` of a nursery.)

property color_depth: `prompt_toolkit.output.color_depth.ColorDepth`

The active `ColorDepth`.

The current value is determined as follows:

- If a color depth was given explicitly to this application, use that value.
- Otherwise, fall back to the color depth that is reported by the `Output` implementation. If the `Output` class was created using `output.defaults.create_output`, then this value is coming from the `$PROMPT_TOOLKIT_COLOR_DEPTH` environment variable.

cpr_not_supported_callback() → None

Called when we don't receive the cursor position response in time.

create_background_task(*coroutine: Awaitable[None]*) → `asyncio.Task[None]`

Start a background task (coroutine) for the running application. When the *Application* terminates, unfinished background tasks will be cancelled.

If `asyncio` had nurseries like Trio, we would create a nursery in *Application.run_async*, and run the given coroutine in that nursery.

Not threadsafe.

property current_buffer: `prompt_toolkit.buffer.Buffer`

The currently focused `Buffer`.

(This returns a dummy `Buffer` when none of the actual buffers has the focus. In this case, it's really not practical to check for *None* values or catch exceptions every time.)

property current_search_state: `prompt_toolkit.search.SearchState`

Return the current `SearchState`. (The one for the focused `BufferControl`.)

exit() → None

exit(**result: prompt_toolkit.application.application._AppResult*, *style: str = ""*) → None

exit(**exception: Union[BaseException, Type[BaseException]]*, *style: str = ""*) → None

Exit application.

Note: If *Application.exit* is called before *Application.run()* is called, then the *Application* won't exit (because the *Application.future* doesn't correspond to the current run). Use a *pre_run* hook and an event to synchronize the closing if there's a chance this can happen.

Parameters

- **result** – Set this result for the application.
- **exception** – Set this exception as the result for an application. For a prompt, this is often `EOFError` or `KeyboardInterrupt`.
- **style** – Apply this style on the whole content when quitting, often this is 'class:exiting' for a prompt. (Used when *erase_when_done* is not set.)

get_used_style_strings() → List[str]

Return a list of used style strings. This is helpful for debugging, and for writing a new *Style*.

invalidate() → None

Thread safe way of sending a repaint trigger to the input event loop.

property invalidated: bool

True when a redraw operation has been scheduled.

property is_running: bool

True when the application is currently active/running.

key_processor

The *InputProcessor* instance.

print_text(text: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]], style: Optional[prompt_toolkit.styles.base.BaseStyle] = None) → None

Print a list of (style_str, text) tuples to the output. (When the UI is running, this method has to be called through *run_in_terminal*, otherwise it will destroy the UI.)

Parameters

- **text** – List of (style_str, text) tuples.
- **style** – Style class to use. Defaults to the active style in the CLI.

quoted_insert

Quoted insert. This flag is set if we go into quoted insert mode.

render_counter

Render counter. This one is increased every time the UI is rendered. It can be used as a key for caching certain information during one rendering.

reset() → None

Reset everything, for reading the next input.

run(pre_run: Optional[Callable[[], None]] = None, set_exception_handler: bool = True, handle_sigint: bool = True, in_thread: bool = False) → prompt_toolkit.application.application._AppResult

A blocking ‘run’ call that waits until the UI is finished.

This will start the current asyncio event loop. If no loop is set for the current thread, then it will create a new loop. If a new loop was created, this won’t close the new loop (if *in_thread=False*).

Parameters

- **pre_run** – Optional callable, which is called right after the “reset” of the application.
- **set_exception_handler** – When set, in case of an exception, go out of the alternate screen and hide the application, display the exception, and wait for the user to press ENTER.
- **in_thread** – When true, run the application in a background thread, and block the current thread until the application terminates. This is useful if we need to be sure the application won’t use the current event loop (asyncio does not support nested event loops). A new event loop will be created in this background thread, and that loop will also be closed when the background thread terminates. When this is used, it’s especially important to make sure that all asyncio background tasks are managed through *get_app().create_background_task()*, so that unfinished tasks are properly cancelled before the event loop is closed. This is used for instance in ptypython.
- **handle_sigint** – Handle SIGINT signal. Call the key binding for *Keys.SIGINT*. (This only works in the main thread.)

```
async run_async(pre_run: Optional[Callable[[], None]] = None, set_exception_handler: bool = True,
                 handle_sigint: bool = True, slow_callback_duration: float = 0.5) →
                 prompt_toolkit.application.application._AppResult
```

Run the prompt_toolkit *Application* until *exit()* has been called. Return the value that was passed to *exit()*.

This is the main entry point for a prompt_toolkit *Application* and usually the only place where the event loop is actually running.

Parameters

- **pre_run** – Optional callable, which is called right after the “reset” of the application.
- **set_exception_handler** – When set, in case of an exception, go out of the alternate screen and hide the application, display the exception, and wait for the user to press ENTER.
- **handle_sigint** – Handle SIGINT signal if possible. This will call the *<sigint>* key binding when a SIGINT is received. (This only works in the main thread.)
- **slow_callback_duration** – Display warnings if code scheduled in the asyncio event loop takes more time than this. The asyncio default of *0.1* is sometimes not sufficient on a slow system, because exceptionally, the drawing of the app, which happens in the event loop, can take a bit longer from time to time.

```
async run_system_command(command: str, wait_for_enter: bool = True, display_before_text:
                          Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str],
                                   Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
                                   Callable[[], Any]]] = "", wait_text: str = 'Press ENTER to continue...') →
                          None
```

Run system command (While hiding the prompt. When finished, all the output will scroll above the prompt.)

Parameters

- **command** – Shell command to be executed.
- **wait_for_enter** – FWait for the user to press enter, when the command is finished.
- **display_before_text** – If given, text to be displayed before the command executes.

Returns A *Future* object.

```
suspend_to_background(suspend_group: bool = True) → None
```

(Not thread safe – to be called from inside the key bindings.) Suspend process.

Parameters **suspend_group** – When true, suspend the whole process group. (This is the default, and probably what you want.)

timeoutlen

Like Vim’s *timeoutlen* option. This can be *None* or a float. For instance, suppose that we have a key binding AB and a second key binding A. If the user presses A and then waits, we don’t handle this binding yet (unless it was marked ‘eager’), because we don’t know what will follow. This timeout is the maximum amount of time that we wait until we call the handlers anyway. Pass *None* to disable this timeout.

ttimeoutlen

When to flush the input (For flushing escape keys.) This is important on terminals that use vt100 input. We can’t distinguish the escape key from for instance the left-arrow key, if we don’t know what follows after “x1b”. This little timer will consider “x1b” to be escape if nothing did follow in this time span. This seems to work like the *ttimeoutlen* option in Vim.

vi_state

Vi state. (For Vi key bindings.)

class prompt_toolkit.application.DummyApplication

When no [Application](#) is running, [get_app\(\)](#) will run an instance of this [DummyApplication](#) instead.

run(*pre_run*: Optional[Callable[[], None]] = None, *set_exception_handler*: bool = True, *handle_sigint*: bool = True, *in_thread*: bool = False) → None

A blocking ‘run’ call that waits until the UI is finished.

This will start the current asyncio event loop. If no loop is set for the current thread, then it will create a new loop. If a new loop was created, this won’t close the new loop (if *in_thread*=False).

Parameters

- **pre_run** – Optional callable, which is called right after the “reset” of the application.
- **set_exception_handler** – When set, in case of an exception, go out of the alternate screen and hide the application, display the exception, and wait for the user to press ENTER.
- **in_thread** – When true, run the application in a background thread, and block the current thread until the application terminates. This is useful if we need to be sure the application won’t use the current event loop (asyncio does not support nested event loops). A new event loop will be created in this background thread, and that loop will also be closed when the background thread terminates. When this is used, it’s especially important to make sure that all asyncio background tasks are managed through [get_app\(\).create_background_task\(\)](#), so that unfinished tasks are properly cancelled before the event loop is closed. This is used for instance in ptython.
- **handle_sigint** – Handle SIGINT signal. Call the key binding for *Keys.SIGINT*. (This only works in the main thread.)

async run_async(*pre_run*: Optional[Callable[[], None]] = None, *set_exception_handler*: bool = True, *handle_sigint*: bool = True, *slow_callback_duration*: float = 0.5) → None

Run the prompt_toolkit [Application](#) until [exit\(\)](#) has been called. Return the value that was passed to [exit\(\)](#).

This is the main entry point for a prompt_toolkit [Application](#) and usually the only place where the event loop is actually running.

Parameters

- **pre_run** – Optional callable, which is called right after the “reset” of the application.
- **set_exception_handler** – When set, in case of an exception, go out of the alternate screen and hide the application, display the exception, and wait for the user to press ENTER.
- **handle_sigint** – Handle SIGINT signal if possible. This will call the *<sigint>* key binding when a SIGINT is received. (This only works in the main thread.)
- **slow_callback_duration** – Display warnings if code scheduled in the asyncio event loop takes more time than this. The asyncio default of 0.1 is sometimes not sufficient on a slow system, because exceptionally, the drawing of the app, which happens in the event loop, can take a bit longer from time to time.

async run_system_command(*command*: str, *wait_for_enter*: bool = True, *display_before_text*: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = "", *wait_text*: str = "") → None

Run system command (While hiding the prompt. When finished, all the output will scroll above the prompt.)

Parameters

- **command** – Shell command to be executed.
- **wait_for_enter** – FWait for the user to press enter, when the command is finished.

- **display_before_text** – If given, text to be displayed before the command executes.

Returns A *Future* object.

suspend_to_background(*suspend_group: bool = True*) → None

(Not thread safe – to be called from inside the key bindings.) Suspend process.

Parameters **suspend_group** – When true, suspend the whole process group. (This is the default, and probably what you want.)

`prompt_toolkit.application.create_app_session(input: Optional[Input] = None, output: Optional[Output] = None) → Generator[prompt_toolkit.application.current.AppSession, None, None]`

Create a separate AppSession.

This is useful if there can be multiple individual `AppSession`'s going on. Like in the case of an Telnet/SSH server. This functionality uses contextvars and requires at least Python 3.7.

`prompt_toolkit.application.get_app() → Application[Any]`

Get the current active (running) Application. An *Application* is active during the *Application.run_async()* call.

We assume that there can only be one *Application* active at the same time. There is only one terminal window, with only one stdin and stdout. This makes the code significantly easier than passing around the *Application* everywhere.

If no *Application* is running, then return by default a *DummyApplication*. For practical reasons, we prefer to not raise an exception. This way, we don't have to check all over the place whether an actual *Application* was returned.

(For applications like *pymux* where we can have more than one *Application*, we'll use a work-around to handle that.)

`prompt_toolkit.application.get_app_or_none() → Optional[Application[Any]]`

Get the current active (running) Application, or return *None* if no application is running.

`prompt_toolkit.application.in_terminal(render_cli_done: bool = False) → AsyncGenerator[None, None]`

Asynchronous context manager that suspends the current application and runs the body in the terminal.

```
async def f():
    async with in_terminal():
        call_some_function()
        await call_some_async_function()
```

`prompt_toolkit.application.run_in_terminal(func: Callable[[], prompt_toolkit.application.run_in_terminal._T], render_cli_done: bool = False, in_executor: bool = False) →`

`Awaitable[prompt_toolkit.application.run_in_terminal._T]`

Run function on the terminal above the current application or prompt.

What this does is first hiding the prompt, then running this callable (which can safely output to the terminal), and then again rendering the prompt which causes the output of this function to scroll above the prompt.

func is supposed to be a synchronous function. If you need an asynchronous version of this function, use the *in_terminal* context manager directly.

Parameters

- **func** – The callable to execute.

- **render_cli_done** – When True, render the interface in the ‘Done’ state first, then execute the function. If False, erase the interface first.
- **in_executor** – When True, run in executor. (Use this for long blocking functions, when you don’t want to block the event loop.)

Returns A *Future*.

`prompt_toolkit.application.set_app(app: Application[Any]) → Generator[None, None, None]`
Context manager that sets the given *Application* active in an *AppSession*.

This should only be called by the *Application* itself. The application will automatically be active while its running. If you want the application to be active in other threads/coroutines, where that’s not the case, use *contextvars.copy_context()*, or use *Application.context* to run it in the appropriate context.

3.11.2 Formatted text

Many places in `prompt_toolkit` can take either plain text, or formatted text. For instance the `prompt()` function takes either plain text or formatted text for the prompt. The *FormattedTextControl* can also take either plain text or formatted text.

In any case, there is an input that can either be just plain text (a string), an *HTML* object, an *ANSI* object or a sequence of *(style_string, text)* tuples. The `to_formatted_text()` conversion function takes any of these and turns all of them into such a tuple sequence.

class `prompt_toolkit.formatted_text.ANSI(value: str)`

ANSI formatted text. Take something ANSI escaped text, for use as a formatted string. E.g.

```
ANSI('\x1b[31mhello \x1b[32mworld')
```

Characters between `\001` and `\002` are supposed to have a zero width when printed, but these are literally sent to the terminal output. This can be used for instance, for inserting Final Term prompt commands. They will be translated into a `prompt_toolkit` ‘[ZeroWidthEscape]’ fragment.

format(**args: str, **kwargs: str*) → *prompt_toolkit.formatted_text.ansi.ANSI*

Like *str.format*, but make sure that the arguments are properly escaped. (No ANSI escapes can be injected.)

class `prompt_toolkit.formatted_text.FormattedText(iterable=(), /)`

A list of *(style, text)* tuples.

(In some situations, this can also be *(style, text, mouse_handler)* tuples.)

class `prompt_toolkit.formatted_text.HTML(value: str)`

HTML formatted text. Take something HTML-like, for use as a formatted string.

```
# Turn something into red.
HTML('<style fg="ansired" bg="#00ff44">...</style>')

# Italic, bold, underline and strike.
HTML('<i>...</i>')
HTML('<b>...</b>')
HTML('<u>...</u>')
HTML('<s>...</s>')
```

All HTML elements become available as a “class” in the style sheet. E.g. `<username>...</username>` can be styled, by setting a style for `username`.

format(**args: object, **kwargs: object*) → *prompt_toolkit.formatted_text.html.HTML*

Like *str.format*, but make sure that the arguments are properly escaped.

class `prompt_toolkit.formatted_text.PygmentsTokens(token_list: List[Tuple[Token, str]])`
 Turn a pygments token list into a list of prompt_toolkit text fragments ((style_str, text) tuples).

class `prompt_toolkit.formatted_text.Template(text: str)`
 Template for string interpolation with formatted text.

Example:

```
Template(' ... {} ... ').format(HTML(...))
```

Parameters **text** – Plain text.

`prompt_toolkit.formatted_text.fragment_list_len(fragments: List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]) → int`

Return the amount of characters in this text fragment list.

Parameters **fragments** – List of (style_str, text) or (style_str, text, mouse_handler) tuples.

`prompt_toolkit.formatted_text.fragment_list_to_text(fragments: List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]) → str`

Concatenate all the text parts again.

Parameters **fragments** – List of (style_str, text) or (style_str, text, mouse_handler) tuples.

`prompt_toolkit.formatted_text.fragment_list_width(fragments: List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]) → int`

Return the character width of this text fragment list. (Take double width characters into account.)

Parameters **fragments** – List of (style_str, text) or (style_str, text, mouse_handler) tuples.

`prompt_toolkit.formatted_text.is_formatted_text(value: object) → TypeGuard[AnyFormattedText]`
 Check whether the input is valid formatted text (for use in assert statements). In case of a callable, it doesn't check the return type.

`prompt_toolkit.formatted_text.merge_formatted_text(items: Iterable[Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]]]) → Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]]`

Merge (Concatenate) several pieces of formatted text together.

`prompt_toolkit.formatted_text.split_lines(fragments: List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]) → Iterable[List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]]`

Take a single list of (style_str, text) tuples and yield one such list for each line. Just like str.split, this will yield at least one item.

Parameters **fragments** – List of (style_str, text) or (style_str, text, mouse_handler) tuples.

`prompt_toolkit.formatted_text.to_formatted_text`(value: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]], style: str = "", auto_convert: bool = False) → *FormattedText*

Convert the given value (which can be formatted text) into a list of text fragments. (Which is the canonical form of formatted text.) The outcome is always a *FormattedText* instance, which is a list of (style, text) tuples.

It can take a plain text string, an *HTML* or *ANSI* object, anything that implements `__pt_formatted_text__` or a callable that takes no arguments and returns one of those.

Parameters

- **style** – An additional style string which is applied to all text fragments.
- **auto_convert** – If *True*, also accept other types, and convert them to a string first.

`prompt_toolkit.formatted_text.to_plain_text`(value: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]]) → str

Turn any kind of formatted text back into plain text.

3.11.3 Buffer

Data structures for the Buffer. It holds the text, cursor position, history, etc...

```
class prompt_toolkit.buffer.Buffer(completer: Optional[prompt_toolkit.completion.base.Completer] =
    None, auto_suggest:
    Optional[prompt_toolkit.auto_suggest.AutoSuggest] = None, history:
    Optional[prompt_toolkit.history.History] = None, validator:
    Optional[prompt_toolkit.validation.Validator] = None, tempfile_suffix:
    Union[str, Callable[[], str]] = "", tempfile: Union[str, Callable[[], str]]
    = "", name: str = "", complete_while_typing:
    Union[prompt_toolkit.filters.base.Filter, bool] = False,
    validate_while_typing: Union[prompt_toolkit.filters.base.Filter, bool]
    = False, enable_history_search:
    Union[prompt_toolkit.filters.base.Filter, bool] = False, document:
    Optional[prompt_toolkit.document.Document] = None,
    accept_handler: Optional[Callable[[prompt_toolkit.buffer.Buffer],
    bool]] = None, read_only: Union[prompt_toolkit.filters.base.Filter,
    bool] = False, multiline: Union[prompt_toolkit.filters.base.Filter,
    bool] = True, on_text_changed:
    Optional[Callable[[prompt_toolkit.buffer.Buffer], None]] = None,
    on_text_insert: Optional[Callable[[prompt_toolkit.buffer.Buffer],
    None]] = None, on_cursor_position_changed:
    Optional[Callable[[prompt_toolkit.buffer.Buffer], None]] = None,
    on_completions_changed:
    Optional[Callable[[prompt_toolkit.buffer.Buffer], None]] = None,
    on_suggestion_set: Optional[Callable[[prompt_toolkit.buffer.Buffer],
    None]] = None)
```

The core data structure that holds the text and cursor position of the current input line and implements all text manipulations on top of it. It also implements the history, undo stack and the completion state.

Parameters

- **completer** – *Completer* instance.
- **history** – *History* instance.
- **tempfile_suffix** – The tempfile suffix (extension) to be used for the “open in editor” function. For a Python REPL, this would be “.py”, so that the editor knows the syntax highlighting to use. This can also be a callable that returns a string.
- **tempfile** – For more advanced tempfile situations where you need control over the subdirectories and filename. For a Git Commit Message, this would be “.git/COMMIT_EDITMSG”, so that the editor knows the syntax highlighting to use. This can also be a callable that returns a string.
- **name** – Name for this buffer. E.g. DEFAULT_BUFFER. This is mostly useful for key bindings where we sometimes prefer to refer to a buffer by their name instead of by reference.
- **accept_handler** – Called when the buffer input is accepted. (Usually when the user presses *enter*.) The accept handler receives this *Buffer* as input and should return True when the buffer text should be kept instead of calling reset.

In case of a *PromptSession* for instance, we want to keep the text, because we will exit the application, and only reset it during the next run.

Events:

Parameters

- **on_text_changed** – When the buffer text changes. (Callable or None.)
- **on_text_insert** – When new text is inserted. (Callable or None.)
- **on_cursor_position_changed** – When the cursor moves. (Callable or None.)
- **on_completions_changed** – When the completions were changed. (Callable or None.)
- **on_suggestion_set** – When an auto-suggestion text has been set. (Callable or None.)

Filters:

Parameters

- **complete_while_typing** – *Filter* or *bool*. Decide whether or not to do asynchronous autocompleting while typing.
- **validate_while_typing** – *Filter* or *bool*. Decide whether or not to do asynchronous validation while typing.
- **enable_history_search** – *Filter* or *bool* to indicate when up-arrow partial string matching is enabled. It is advised to not enable this at the same time as *complete_while_typing*, because when there is an autocompletion found, the up arrows usually browse through the completions, rather than through the history.
- **read_only** – *Filter*. When True, changes will not be allowed.
- **multiline** – *Filter* or *bool*. When not set, pressing *Enter* will call the *accept_handler*. Otherwise, pressing *Esc-Enter* is required.

append_to_history() → None

Append the current input to the history.

apply_completion(completion: [prompt_toolkit.completion.base.Completion](#)) → None

Insert a given completion.

apply_search(*search_state: prompt_toolkit.search.SearchState, include_current_position: bool = True, count: int = 1*) → None

Apply search. If something is found, set *working_index* and *cursor_position*.

auto_down(*count: int = 1, go_to_start_of_line_if_history_changes: bool = False*) → None

If we're not on the last line (of a multiline input) go a line down, otherwise go forward in history. (If nothing is selected.)

auto_up(*count: int = 1, go_to_start_of_line_if_history_changes: bool = False*) → None

If we're not on the first line (of a multiline input) go a line up, otherwise go back in history. (If nothing is selected.)

cancel_completion() → None

Cancel completion, go back to the original text.

complete_next(*count: int = 1, disable_wrap_around: bool = False*) → None

Browse to the next completions. (Does nothing if there are no completion.)

complete_previous(*count: int = 1, disable_wrap_around: bool = False*) → None

Browse to the previous completions. (Does nothing if there are no completion.)

copy_selection(*_cut: bool = False*) → *prompt_toolkit.clipboard.base.ClipboardData*

Copy selected text and return *ClipboardData* instance.

Notice that this doesn't store the copied data on the clipboard yet. You can store it like this:

```
data = buffer.copy_selection()
get_app().clipboard.set_data(data)
```

cursor_down(*count: int = 1*) → None

(for multiline edit). Move cursor to the next line.

cursor_up(*count: int = 1*) → None

(for multiline edit). Move cursor to the previous line.

cut_selection() → *prompt_toolkit.clipboard.base.ClipboardData*

Delete selected text and return *ClipboardData* instance.

delete(*count: int = 1*) → str

Delete specified number of characters and Return the deleted text.

delete_before_cursor(*count: int = 1*) → str

Delete specified number of characters before cursor and return the deleted text.

property document: *prompt_toolkit.document.Document*

Return *Document* instance from the current text, cursor position and selection state.

document_for_search(*search_state: prompt_toolkit.search.SearchState*) →

prompt_toolkit.document.Document

Return a *Document* instance that has the text/cursor position for this search, if we would apply it. This will be used in the *BufferControl* to display feedback while searching.

get_search_position(*search_state: prompt_toolkit.search.SearchState, include_current_position: bool = True, count: int = 1*) → int

Get the cursor position for this search. (This operation won't change the *working_index*. It's won't go through the history. Vi text objects can't span multiple items.)

go_to_completion(*index: Optional[int]*) → None

Select a completion from the list of current completions.

go_to_history(*index: int*) → None

Go to this item in the history.

history_backward(*count: int = 1*) → None

Move backwards through history.

history_forward(*count: int = 1*) → None

Move forwards through the history.

Parameters **count** – Amount of items to move forward.

insert_line_above(*copy_margin: bool = True*) → None

Insert a new line above the current one.

insert_line_below(*copy_margin: bool = True*) → None

Insert a new line below the current one.

insert_text(*data: str, overwrite: bool = False, move_cursor: bool = True, fire_event: bool = True*) → None

Insert characters at cursor position.

Parameters **fire_event** – Fire *on_text_insert* event. This is mainly used to trigger autocompletion while typing.

property is_returnable: bool

True when there is something handling accept.

join_next_line(*separator: str = ''*) → None

Join the next line to the current one by deleting the line ending after the current line.

join_selected_lines(*separator: str = ''*) → None

Join the selected lines.

load_history_if_not_yet_loaded() → None

Create task for populating the buffer history (if not yet done).

Note:

This needs to be called from within the event loop of the application, because history loading is async, and we need to be sure the right event loop is active. Therefore, we call this method in the ``BufferControl.create_content``.

There are situations where `prompt_toolkit` applications are created in one thread, but will later run in a different thread (Ptpython is one example. The REPL runs in a separate thread, in order to prevent interfering with a potential different event loop in the main thread. The REPL UI however is still created in the main thread.) We could decide to not support creating `prompt_toolkit` objects in one thread and running the application in a different thread, but history loading is the only place where it matters, and this solves it.

newline(*copy_margin: bool = True*) → None

Insert a line ending at the current position.

open_in_editor(*validate_and_handle: bool = False*) → `asyncio.Task[None]`

Open code in editor.

This returns a future, and runs in a thread executor.

paste_clipboard_data(data: `prompt_toolkit.clipboard.base.ClipboardData`, paste_mode: `prompt_toolkit.selection.PasteMode = PasteMode.EMACS`, count: int = 1) → None

Insert the data from the clipboard.

reset(document: Optional[`prompt_toolkit.document.Document`] = None, append_to_history: bool = False) → None

Parameters **append_to_history** – Append current input to history first.

save_to_undo_stack(clear_redo_stack: bool = True) → None

Save current state (input text and cursor position), so that we can restore it by calling undo.

set_document(value: `prompt_toolkit.document.Document`, bypass_readonly: bool = False) → None

Set `Document` instance. Like the `document` property, but accept an `bypass_readonly` argument.

Parameters **bypass_readonly** – When True, don't raise an `EditReadOnlyBuffer` exception, even when the buffer is read-only.

Warning: When this buffer is read-only and `bypass_readonly` was not passed, the `EditReadOnlyBuffer` exception will be caught by the `KeyProcessor` and is silently suppressed. This is important to keep in mind when writing key bindings, because it won't do what you expect, and there won't be a stack trace. Use try/finally around this function if you need some cleanup code.

start_completion(select_first: bool = False, select_last: bool = False, insert_common_part: bool = False, complete_event: Optional[`prompt_toolkit.completion.base.CompleteEvent`] = None) → None

Start asynchronous autocompletion of this buffer. (This will do nothing if a previous completion was still in progress.)

start_history_lines_completion() → None

Start a completion based on all the other lines in the document and the history.

start_selection(selection_type: `prompt_toolkit.selection.SelectionType = SelectionType.CHARACTERS`) → None

Take the current cursor position as the start of this selection.

swap_characters_before_cursor() → None

Swap the last two characters before the cursor.

transform_current_line(transform_callback: Callable[[str], str]) → None

Apply the given transformation function to the current line.

Parameters **transform_callback** – callable that takes a string and return a new string.

transform_lines(line_index_iterator: Iterable[int], transform_callback: Callable[[str], str]) → str

Transforms the text on a range of lines. When the iterator yield an index not in the range of lines that the document contains, it skips them silently.

To uppercase some lines:

```
new_text = transform_lines(range(5,10), lambda text: text.upper())
```

Parameters

- **line_index_iterator** – Iterator of line numbers (int)

- **transform_callback** – callable that takes the original text of a line, and return the new text for this line.

Returns The new text.

transform_region(*from_*: int, *to*: int, *transform_callback*: Callable[[str], str]) → None

Transform a part of the input string.

Parameters

- **from** – (int) start position.
- **to** – (int) end position.
- **transform_callback** – Callable which accepts a string and returns the transformed string.

validate(*set_cursor*: bool = False) → bool

Returns *True* if valid.

Parameters **set_cursor** – Set the cursor position, if an error was found.

validate_and_handle() → None

Validate buffer and handle the accept action.

yank_last_arg(*n*: Optional[int] = None) → None

Like *yank_nth_arg*, but if no argument has been given, yank the last word by default.

yank_nth_arg(*n*: Optional[int] = None, *_yank_last_arg*: bool = False) → None

Pick *n*th word from previous history entry (depending on current *yank_nth_arg_state*) and insert it at current position. Rotate through history if called repeatedly. If no *n* has been given, take the first argument. (The second word.)

Parameters **n** – (None or int), The index of the word from the previous line to take.

class prompt_toolkit.buffer.**CompletionState**(*original_document*: prompt_toolkit.document.Document, *completions*: Optional[List[prompt_toolkit.completion.base.Completion]] = None, *complete_index*: Optional[int] = None)

Immutable class that contains a completion state.

complete_index

Position in the *completions* array. This can be *None* to indicate “no completion”, the original text.

completions

List of all the current Completion instances which are possible at this point.

property current_completion: Optional[prompt_toolkit.completion.base.Completion]

Return the current completion, or return *None* when no completion is selected.

go_to_index(*index*: Optional[int]) → None

Create a new *CompletionState* object with the new index.

When *index* is *None* deselect the completion.

new_text_and_position() → Tuple[str, int]

Return (new_text, new_cursor_position) for this completion.

original_document

Document as it was when the completion started.

exception prompt_toolkit.buffer.**EditReadOnlyBuffer**

Attempt editing of read-only *Buffer*.

`prompt_toolkit.buffer.indent(buffer: prompt_toolkit.buffer.Buffer, from_row: int, to_row: int, count: int = 1) → None`

Indent text of a *Buffer* object.

`prompt_toolkit.buffer.reshape_text(buffer: prompt_toolkit.buffer.Buffer, from_row: int, to_row: int) → None`

Reformat text, taking the width into account. *to_row* is included. (Vi ‘gq’ operator.)

`prompt_toolkit.buffer.unindent(buffer: prompt_toolkit.buffer.Buffer, from_row: int, to_row: int, count: int = 1) → None`

Unindent text of a *Buffer* object.

3.11.4 Selection

Data structures for the selection.

`class prompt_toolkit.selection.PasteMode(value)`
An enumeration.

`class prompt_toolkit.selection.SelectionState(original_cursor_position: int = 0, type: prompt_toolkit.selection.SelectionType = SelectionType.CHARACTERS)`

State of the current selection.

Parameters

- **original_cursor_position** – int
- **type** – *SelectionType*

`class prompt_toolkit.selection.SelectionType(value)`
Type of selection.

BLOCK = 'BLOCK'
A block selection. (Visual-Block in Vi.)

CHARACTERS = 'CHARACTERS'
Characters. (Visual in Vi.)

LINES = 'LINES'
Whole lines. (Visual-Line in Vi.)

3.11.5 Clipboard

`class prompt_toolkit.clipboard.Clipboard`
Abstract baseclass for clipboards. (An implementation can be in memory, it can share the X11 or Windows keyboard, or can be persistent.)

abstract get_data() → *prompt_toolkit.clipboard.base.ClipboardData*
Return clipboard data.

rotate() → None
For Emacs mode, rotate the kill ring.

abstract set_data(data: prompt_toolkit.clipboard.base.ClipboardData) → None
Set data to the clipboard.

Parameters **data** – *ClipboardData* instance.

set_text(*text: str*) → None
 Shortcut for setting plain text on clipboard.

class prompt_toolkit.clipboard.**ClipboardData**(*text: str = "", type: prompt_toolkit.selection.SelectionType = SelectionType.CHARACTERS*)

Text on the clipboard.

Parameters

- **text** – string
- **type** – *SelectionType*

class prompt_toolkit.clipboard.**DummyClipboard**
 Clipboard implementation that doesn't remember anything.

get_data() → *prompt_toolkit.clipboard.base.ClipboardData*
 Return clipboard data.

rotate() → None
 For Emacs mode, rotate the kill ring.

set_data(*data: prompt_toolkit.clipboard.base.ClipboardData*) → None
 Set data to the clipboard.

Parameters **data** – *ClipboardData* instance.

set_text(*text: str*) → None
 Shortcut for setting plain text on clipboard.

class prompt_toolkit.clipboard.**DynamicClipboard**(*get_clipboard: Callable[[], Optional[prompt_toolkit.clipboard.base.Clipboard]]*)

Clipboard class that can dynamically returns any Clipboard.

Parameters **get_clipboard** – Callable that returns a *Clipboard* instance.

get_data() → *prompt_toolkit.clipboard.base.ClipboardData*
 Return clipboard data.

rotate() → None
 For Emacs mode, rotate the kill ring.

set_data(*data: prompt_toolkit.clipboard.base.ClipboardData*) → None
 Set data to the clipboard.

Parameters **data** – *ClipboardData* instance.

set_text(*text: str*) → None
 Shortcut for setting plain text on clipboard.

class prompt_toolkit.clipboard.**InMemoryClipboard**(*data: Optional[prompt_toolkit.clipboard.base.ClipboardData] = None, max_size: int = 60*)

Default clipboard implementation. Just keep the data in memory.

This implements a kill-ring, for Emacs mode.

get_data() → *prompt_toolkit.clipboard.base.ClipboardData*
 Return clipboard data.

rotate() → None
 For Emacs mode, rotate the kill ring.

set_data(*data: prompt_toolkit.clipboard.base.ClipboardData*) → None
 Set data to the clipboard.

Parameters **data** – *ClipboardData* instance.

class `prompt_toolkit.clipboard.pyperclip.PyperclipClipboard`

Clipboard that synchronizes with the Windows/Mac/Linux system clipboard, using the pyperclip module.

get_data() → *prompt_toolkit.clipboard.base.ClipboardData*

Return clipboard data.

set_data(data: prompt_toolkit.clipboard.base.ClipboardData) → None

Set data to the clipboard.

Parameters **data** – *ClipboardData* instance.

3.11.6 Auto completion

class `prompt_toolkit.completion.CompleteEvent`(*text_inserted: bool = False, completion_requested: bool = False*)

Event that called the completer.

Parameters

- **text_inserted** – When True, it means that completions are requested because of a text insert. (*Buffer.complete_while_typing*.)
- **completion_requested** – When True, it means that the user explicitly pressed the *Tab* key in order to view the completions.

These two flags can be used for instance to implement a completer that shows some completions when Tab has been pressed, but not automatically when the user presses a space. (Because of *complete_while_typing*.)

completion_requested

Used explicitly requested completion by pressing ‘tab’.

text_inserted

Automatic completion while typing.

class `prompt_toolkit.completion.Completer`

Base class for completer implementations.

abstract **get_completions**(*document: prompt_toolkit.document.Document, complete_event: prompt_toolkit.completion.base.CompleteEvent*) → *Iterable[prompt_toolkit.completion.base.Completion]*

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

get_completions_async(*document: prompt_toolkit.document.Document, complete_event: prompt_toolkit.completion.base.CompleteEvent*) → *AsyncGenerator[prompt_toolkit.completion.base.Completion, None]*

Asynchronous generator for completions. (Probably, you won’t have to override this.)

Asynchronous generator of *Completion* objects.

```
class prompt_toolkit.completion.Completion(text: str, start_position: int = 0, display:
    Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent],
    None]]], Callable[[], Any]]] = None, display_meta:
    Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent],
    None]]], Callable[[], Any]]] = None, style: str = "",
    selected_style: str = "")
```

Parameters

- **text** – The new string that will be inserted into the document.
- **start_position** – Position relative to the cursor_position where the new text will start. The text will be inserted between the start_position and the original cursor position.
- **display** – (optional string or formatted text) If the completion has to be displayed differently in the completion menu.
- **display_meta** – (Optional string or formatted text) Meta information about the completion, e.g. the path or source where it's coming from. This can also be a callable that returns a string.
- **style** – Style string.
- **selected_style** – Style string, used for a selected completion. This can override the *style* parameter.

```
property display_meta: List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]
    Return meta-text. (This is lazy when using a callable).
```

```
property display_meta_text: str
    The 'meta' field as plain text.
```

```
property display_text: str
    The 'display' field as plain text.
```

```
new_completion_from_position(position: int) → prompt_toolkit.completion.base.Completion
    (Only for internal use!) Get a new completion by splitting this one. Used by Application when it needs to
    have a list of new completions after inserting the common prefix.
```

```
class prompt_toolkit.completion.ConditionalCompleter(completer:
    prompt_toolkit.completion.base.Completer,
    filter: Union[prompt_toolkit.filters.base.Filter,
    bool])
```

Wrapper around any other completer that will enable/disable the completions depending on whether the received condition is satisfied.

Parameters

- **completer** – *Completer* instance.
- **filter** – *Filter* instance.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
    This should be a generator that yields Completion instances.
```

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
get_completions_async(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    AsyncGenerator[prompt_toolkit.completion.base.Completion, None]
```

Asynchronous generator for completions. (Probably, you won't have to override this.)

Asynchronous generator of *Completion* objects.

```
class prompt_toolkit.completion.DeduplicateCompleter(completer:
    prompt_toolkit.completion.base.Completer)
```

Wrapper around a completer that removes duplicates. Only the first unique completions are kept.

Completions are considered to be a duplicate if they result in the same document text when they would be applied.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
class prompt_toolkit.completion.DummyCompleter
```

A completer that doesn't return any completion.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
class prompt_toolkit.completion.DynamicCompleter(get_completer: Callable[[], Op-
    tional[prompt_toolkit.completion.base.Completer]])
```

Completer class that can dynamically returns any *Completer*.

Parameters **get_completer** – Callable that returns a *Completer* instance.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
get_completions_async(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    AsyncGenerator[prompt_toolkit.completion.base.Completion, None]
```

Asynchronous generator for completions. (Probably, you won't have to override this.)

Asynchronous generator of *Completion* objects.

```
class prompt_toolkit.completion.ExecutableCompleter
```

Complete only executable files in the current path.

```
class prompt_toolkit.completion.FuzzyCompleter(completer: prompt_toolkit.completion.base.Completer,
    WORD: bool = False, pattern: Optional[str] = None,
    enable_fuzzy: Union[prompt_toolkit.filters.base.Filter,
    bool] = True)
```

Fuzzy completion. This wraps any other completer and turns it into a fuzzy completer.

If the list of words is: ["leopard", "gorilla", "dinosaur", "cat", "bee"] Then trying to complete "oar" would yield "leopard" and "dinosaur", but not the others, because they match the regular expression 'o.*a.*r'. Similar, in another application "djm" could expand to "django_migrations".

The results are sorted by relevance, which is defined as the start position and the length of the match.

Notice that this is not really a tool to work around spelling mistakes, like what would be possible with difflib. The purpose is rather to have a quicker or more intuitive way to filter the given completions, especially when many completions have a common prefix.

Fuzzy algorithm is based on this post: <https://blog.amjith.com/fuzzyfinder-in-10-lines-of-python>

Parameters

- **completer** – A *Completer* instance.
- **WORD** – When True, use WORD characters.
- **pattern** – Regex pattern which selects the characters before the cursor that are considered for the fuzzy matching.
- **enable_fuzzy** – (bool or *Filter*) Enabled the fuzzy behavior. For easily turning fuzzyness on or off according to a certain condition.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
class prompt_toolkit.completion.FuzzyWordCompleter(words: Union[List[str], Callable[[], List[str]]],
                                                    meta_dict: Optional[Dict[str, str]] = None,
                                                    WORD: bool = False)
```

Fuzzy completion on a list of words.

(This is basically a *WordCompleter* wrapped in a *FuzzyCompleter*.)

Parameters

- **words** – List of words or callable that returns a list of words.
- **meta_dict** – Optional dict mapping words to their meta-information.
- **WORD** – When True, use WORD characters.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
                  prompt_toolkit.completion.base.CompleteEvent) →
                  Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
class prompt_toolkit.completion.NestedCompleter(options: Dict[str, Op-
                                                  tional[prompt_toolkit.completion.base.Completer]],
                                                  ignore_case: bool = True)
```

Completer which wraps around several other completers, and calls any the one that corresponds with the first word of the input.

By combining multiple *NestedCompleter* instances, we can achieve multiple hierarchical levels of autocompletion. This is useful when *WordCompleter* is not sufficient.

If you need multiple levels, check out the *from_nested_dict* classmethod.

```
classmethod from_nested_dict(data: Mapping[str, Union[Any, Set[str], None,
                                              prompt_toolkit.completion.base.Completer]]) →
                           prompt_toolkit.completion.nested.NestedCompleter
```

Create a *NestedCompleter*, starting from a nested dictionary data structure, like this:

```
data = {
    'show': {
        'version': None,
        'interfaces': None,
        'clock': None,
        'ip': {'interface': {'brief'}}
    },
    'exit': None
    'enable': None
}
```

The value should be *None* if there is no further completion at some point. If all values in the dictionary are *None*, it is also possible to use a set instead.

Values in this data structure can be a completers as well.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
class prompt_toolkit.completion.PathCompleter(only_directories: bool = False, get_paths:
    Optional[Callable[[], List[str]]] = None, file_filter:
    Optional[Callable[[str], bool]] = None, min_input_len:
    int = 0, expanduser: bool = False)
```

Complete for Path variables.

Parameters

- **get_paths** – Callable which returns a list of directories to look into when the user enters a relative path.
- **file_filter** – Callable which takes a filename and returns whether this file should show up in the completion. *None* when no filtering has to be done.
- **min_input_len** – Don't do autocompletion when the input string is shorter.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
class prompt_toolkit.completion.ThreadedCompleter(completer:
    prompt_toolkit.completion.base.Completer)
```

Wrapper that runs the *get_completions* generator in a thread.

(Use this to prevent the user interface from becoming unresponsive if the generation of completions takes too much time.)

The completions will be displayed as soon as they are produced. The user can already select a completion, even if not all completions are displayed.

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
get_completions_async(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    AsyncGenerator[prompt_toolkit.completion.base.Completion, None]
```

Asynchronous generator of completions.

```
class prompt_toolkit.completion.WordCompleter(words: Union[List[str], Callable[[], List[str]]],
    ignore_case: bool = False, display_dict:
    Optional[Mapping[str, Optional[Union[str,
    MagicFormattedText, List[Union[Tuple[str, str],
    Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent],
    None]]], Callable[[], Any]]]]] = None, meta_dict:
    Optional[Mapping[str, Optional[Union[str,
    MagicFormattedText, List[Union[Tuple[str, str],
    Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent],
    None]]], Callable[[], Any]]]]] = None, WORD: bool =
    False, sentence: bool = False, match_middle: bool =
    False, pattern: Optional[Pattern[str]] = None)
```

Simple autocompletion on a list of words.

Parameters

- **words** – List of words or callable that returns a list of words.
- **ignore_case** – If True, case-insensitive completion.
- **meta_dict** – Optional dict mapping words to their meta-text. (This should map strings to strings or formatted text.)
- **WORD** – When True, use WORD characters.
- **sentence** – When True, don't complete by comparing the word before the cursor, but by comparing all the text before the cursor. In this case, the list of words is just a list of strings, where each string can contain spaces. (Can not be used together with the WORD option.)
- **match_middle** – When True, match not only the start, but also in the middle of the word.
- **pattern** – Optional compiled regex for finding the word before the cursor to complete. When given, use this regex pattern instead of default one (see `document.FIND_WORD_RE`)

```
get_completions(document: prompt_toolkit.document.Document, complete_event:
    prompt_toolkit.completion.base.CompleteEvent) →
    Iterable[prompt_toolkit.completion.base.Completion]
```

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

Parameters

- **document** – *Document* instance.
- **complete_event** – *CompleteEvent* instance.

```
prompt_toolkit.completion.get_common_complete_suffix(document:
                                                    prompt_toolkit.document.Document,
                                                    completions: Sequence[prompt_toolkit.completion.base.Completion])
                                                    → str
```

Return the common prefix for all completions.

```
prompt_toolkit.completion.merge_completers(completers:
                                             Sequence[prompt_toolkit.completion.base.Completer],
                                             deduplicate: bool = False) →
                                             prompt_toolkit.completion.base.Completer
```

Combine several completers into one.

Parameters deduplicate – If *True*, wrap the result in a *DeduplicateCompleter* so that completions that would result in the same text will be deduplicated.

3.11.7 Document

The *Document* that implements all the text operations/querying.

```
class prompt_toolkit.document.Document(text: str = "", cursor_position: Optional[int] = None, selection:
                                       Optional[prompt_toolkit.selection.SelectionState] = None)
```

This is a immutable class around the text and cursor position, and contains methods for querying this data, e.g. to give the text before the cursor.

This class is usually instantiated by a *Buffer* object, and accessed as the *document* property of that class.

Parameters

- **text** – string
- **cursor_position** – int
- **selection** – *SelectionState*

```
property char_before_cursor: str
    Return character before the cursor or an empty string.
```

```
property current_char: str
    Return character under cursor or an empty string.
```

```
property current_line: str
    Return the text on the line where the cursor is. (when the input consists of just one line, it equals text.)
```

```
property current_line_after_cursor: str
    Text from the cursor until the end of the line.
```

```
property current_line_before_cursor: str
    Text from the start of the line until the cursor.
```

```
property cursor_position: int
    The document cursor position.
```

property cursor_position_col: int

Current column. (0-based.)

property cursor_position_row: int

Current row. (0-based.)

cut_selection() → Tuple[prompt_toolkit.document.Document,
prompt_toolkit.clipboard.base.ClipboardData]

Return a (Document, ClipboardData) tuple, where the document represents the new document when the selection is cut, and the clipboard data, represents whatever has to be put on the clipboard.

empty_line_count_at_the_end() → int

Return number of empty lines at the end of the document.

end_of_paragraph(count: int = 1, after: bool = False) → int

Return the end of the current paragraph. (Relative cursor position.)

find(sub: str, in_current_line: bool = False, include_current_position: bool = False, ignore_case: bool = False, count: int = 1) → Optional[int]

Find *text* after the cursor, return position relative to the cursor position. Return *None* if nothing was found.

Parameters count – Find the n-th occurrence.

find_all(sub: str, ignore_case: bool = False) → List[int]

Find all occurrences of the substring. Return a list of absolute positions in the document.

find_backwards(sub: str, in_current_line: bool = False, ignore_case: bool = False, count: int = 1) → Optional[int]

Find *text* before the cursor, return position relative to the cursor position. Return *None* if nothing was found.

Parameters count – Find the n-th occurrence.

find_boundaries_of_current_word(WORD: bool = False, include_leading_whitespace: bool = False, include_trailing_whitespace: bool = False) → Tuple[int, int]

Return the relative boundaries (startpos, endpos) of the current word under the cursor. (This is at the current line, because line boundaries obviously don't belong to any word.) If not on a word, this returns (0,0)

find_enclosing_bracket_left(left_ch: str, right_ch: str, start_pos: Optional[int] = None) → Optional[int]

Find the left bracket enclosing current position. Return the relative position to the cursor position.

When *start_pos* is given, don't look past the position.

find_enclosing_bracket_right(left_ch: str, right_ch: str, end_pos: Optional[int] = None) → Optional[int]

Find the right bracket enclosing current position. Return the relative position to the cursor position.

When *end_pos* is given, don't look past the position.

find_matching_bracket_position(start_pos: Optional[int] = None, end_pos: Optional[int] = None) → int

Return relative cursor position of matching [, (, { or < bracket.

When *start_pos* or *end_pos* are given. Don't look past the positions.

find_next_matching_line(match_func: Callable[[str], bool], count: int = 1) → Optional[int]

Look downwards for empty lines. Return the line index, relative to the current line.

find_next_word_beginning(count: int = 1, WORD: bool = False) → Optional[int]

Return an index relative to the cursor position pointing to the start of the next word. Return *None* if nothing was found.

find_next_word_ending(*include_current_position*: bool = False, *count*: int = 1, *WORD*: bool = False) → Optional[int]

Return an index relative to the cursor position pointing to the end of the next word. Return *None* if nothing was found.

find_previous_matching_line(*match_func*: Callable[[str], bool], *count*: int = 1) → Optional[int]

Look upwards for empty lines. Return the line index, relative to the current line.

find_previous_word_beginning(*count*: int = 1, *WORD*: bool = False) → Optional[int]

Return an index relative to the cursor position pointing to the start of the previous word. Return *None* if nothing was found.

find_previous_word_ending(*count*: int = 1, *WORD*: bool = False) → Optional[int]

Return an index relative to the cursor position pointing to the end of the previous word. Return *None* if nothing was found.

find_start_of_previous_word(*count*: int = 1, *WORD*: bool = False, *pattern*: Optional[Pattern[str]] = None) → Optional[int]

Return an index relative to the cursor position pointing to the start of the previous word. Return *None* if nothing was found.

Parameters pattern – (None or compiled regex). When given, use this regex pattern.

get_column_cursor_position(*column*: int) → int

Return the relative cursor position for this column at the current line. (It will stay between the boundaries of the line in case of a larger number.)

get_cursor_down_position(*count*: int = 1, *preferred_column*: Optional[int] = None) → int

Return the relative cursor position (character index) where we would be if the user pressed the arrow-down button.

Parameters preferred_column – When given, go to this column instead of staying at the current column.

get_cursor_left_position(*count*: int = 1) → int

Relative position for cursor left.

get_cursor_right_position(*count*: int = 1) → int

Relative position for cursor_right.

get_cursor_up_position(*count*: int = 1, *preferred_column*: Optional[int] = None) → int

Return the relative cursor position (character index) where we would be if the user pressed the arrow-up button.

Parameters preferred_column – When given, go to this column instead of staying at the current column.

get_end_of_document_position() → int

Relative position for the end of the document.

get_end_of_line_position() → int

Relative position for the end of this line.

get_start_of_document_position() → int

Relative position for the start of the document.

get_start_of_line_position(*after_whitespace*: bool = False) → int

Relative position for the start of this line.

get_word_before_cursor(*WORD*: bool = False, *pattern*: Optional[Pattern[str]] = None) → str

Give the word before the cursor. If we have whitespace before the cursor this returns an empty string.

Parameters pattern – (None or compiled regex). When given, use this regex pattern.

get_word_under_cursor(WORD: bool = False) → str

Return the word, currently below the cursor. This returns an empty string when the cursor is on a whitespace region.

has_match_at_current_position(sub: str) → bool

True when this substring is found at the cursor position.

insert_after(text: str) → *prompt_toolkit.document.Document*

Create a new document, with this text inserted after the buffer. It keeps selection ranges and cursor position in sync.

insert_before(text: str) → *prompt_toolkit.document.Document*

Create a new document, with this text inserted before the buffer. It keeps selection ranges and cursor position in sync.

property is_cursor_at_the_end: bool

True when the cursor is at the end of the text.

property is_cursor_at_the_end_of_line: bool

True when the cursor is at the end of this line.

last_non_blank_of_current_line_position() → int

Relative position for the last non blank character of this line.

property leading_whitespace_in_current_line: str

The leading whitespace in the left margin of the current line.

property line_count: int

Return the number of lines in this document. If the document ends with a trailing n, that counts as the beginning of a new line.

property lines: List[str]

Array of all the lines.

property lines_from_current: List[str]

Array of the lines starting from the current line, until the last line.

property on_first_line: bool

True when we are at the first line.

property on_last_line: bool

True when we are at the last line.

paste_clipboard_data(data: *prompt_toolkit.clipboard.base.ClipboardData*, paste_mode:

prompt_toolkit.selection.PasteMode = *PasteMode.EMACS*, count: int = 1) →

prompt_toolkit.document.Document

Return a new *Document* instance which contains the result if we would paste this data at the current cursor position.

Parameters

- **paste_mode** – Where to paste. (Before/after/emacs.)
- **count** – When >1, Paste multiple times.

property selection: Optional[*prompt_toolkit.selection.SelectionState*]

SelectionState object.

selection_range() → Tuple[int, int]

Return (from, to) tuple of the selection. start and end position are included.

This doesn't take the selection type into account. Use *selection_ranges* instead.

selection_range_at_line(*row: int*) → Optional[Tuple[int, int]]

If the selection spans a portion of the given line, return a (from, to) tuple.

The returned upper boundary is not included in the selection, so (0, 0) is an empty selection. (0, 1), is a one character selection.

Returns None if the selection doesn't cover this line at all.

selection_ranges() → Iterable[Tuple[int, int]]

Return a list of (*from*, *to*) tuples for the selection or none if nothing was selected. The upper boundary is not included.

This will yield several (from, to) tuples in case of a BLOCK selection. This will return zero ranges, like (8,8) for empty lines in a block selection.

start_of_paragraph(*count: int = 1, before: bool = False*) → int

Return the start of the current paragraph. (Relative cursor position.)

property text: str

The document text.

translate_index_to_position(*index: int*) → Tuple[int, int]

Given an index for the text, return the corresponding (row, col) tuple. (0-based. Returns (0, 0) for index=0.)

translate_row_col_to_index(*row: int, col: int*) → int

Given a (row, col) tuple, return the corresponding index. (Row and col params are 0-based.)

Negative row/col values are turned into zero.

3.11.8 Enums

`prompt_toolkit.enums.DEFAULT_BUFFER = 'DEFAULT_BUFFER'`

Name of the default buffer.

`class prompt_toolkit.enums.EditingMode(value)`

An enumeration.

`prompt_toolkit.enums.SEARCH_BUFFER = 'SEARCH_BUFFER'`

Name of the search buffer.

`prompt_toolkit.enums.SYSTEM_BUFFER = 'SYSTEM_BUFFER'`

Name of the system buffer.

3.11.9 History

Implementations for the history of a *Buffer*.

NOTE: There is no *DynamicHistory*: This doesn't work well, because the *Buffer* needs to be able to attach an event handler to the event when a history entry is loaded. This loading can be done asynchronously and making the history swappable would probably break this.

`class prompt_toolkit.history.DummyHistory`

History object that doesn't remember anything.

append_string(*string: str*) → None

Add string to the history.

load_history_strings() → Iterable[str]

This should be a generator that yields *str* instances.

It should yield the most recent items first, because they are the most important. (The history can already be used, even when it's only partially loaded.)

store_string(string: str) → None

Store the string in persistent storage.

class prompt_toolkit.history.**FileHistory**(filename: str)

History class that stores all strings in a file.

load_history_strings() → Iterable[str]

This should be a generator that yields *str* instances.

It should yield the most recent items first, because they are the most important. (The history can already be used, even when it's only partially loaded.)

store_string(string: str) → None

Store the string in persistent storage.

class prompt_toolkit.history.**History**

Base History class.

This also includes abstract methods for loading/storing history.

append_string(string: str) → None

Add string to the history.

get_strings() → List[str]

Get the strings from the history that are loaded so far. (In order. Oldest item first.)

load() → AsyncGenerator[str, None]

Load the history and yield all the entries in reverse order (latest, most recent history entry first).

This method can be called multiple times from the *Buffer* to repopulate the history when prompting for a new input. So we are responsible here for both caching, and making sure that strings that were appended to the history will be incorporated next time this method is called.

abstract load_history_strings() → Iterable[str]

This should be a generator that yields *str* instances.

It should yield the most recent items first, because they are the most important. (The history can already be used, even when it's only partially loaded.)

abstract store_string(string: str) → None

Store the string in persistent storage.

class prompt_toolkit.history.**InMemoryHistory**(history_strings: Optional[Sequence[str]] = None)

History class that keeps a list of all strings in memory.

In order to prepopulate the history, it's possible to call either *append_string* for all items or pass a list of strings to *__init__* here.

load_history_strings() → Iterable[str]

This should be a generator that yields *str* instances.

It should yield the most recent items first, because they are the most important. (The history can already be used, even when it's only partially loaded.)

store_string(string: str) → None

Store the string in persistent storage.

class prompt_toolkit.history.**ThreadedHistory**(history: prompt_toolkit.history.History)

Wrapper around *History* implementations that run the *load()* generator in a thread.

Use this to increase the start-up time of prompt_toolkit applications. History entries are available as soon as they are loaded. We don't have to wait for everything to be loaded.

append_string(string: str) → None

Add string to the history.

load() → AsyncGenerator[str, None]

Like *History.load()*, but call *self.load_history_strings()* in a background thread.

load_history_strings() → Iterable[str]

This should be a generator that yields *str* instances.

It should yield the most recent items first, because they are the most important. (The history can already be used, even when it's only partially loaded.)

store_string(string: str) → None

Store the string in persistent storage.

3.11.10 Keys

class prompt_toolkit.keys.**Keys**(value)

List of keys for use in key bindings.

Note that this is an “StrEnum”, all values can be compared against strings.

3.11.11 Style

Styling for prompt_toolkit applications.

class prompt_toolkit.styles.**AdjustBrightnessStyleTransformation**(min_brightness:
Union[Callable[[], float], float]
= 0.0, max_brightness:
Union[Callable[[], float], float]
= 1.0)

Adjust the brightness to improve the rendering on either dark or light backgrounds.

For dark backgrounds, it's best to increase *min_brightness*. For light backgrounds it's best to decrease *max_brightness*. Usually, only one setting is adjusted.

This will only change the brightness for text that has a foreground color defined, but no background color. It works best for 256 or true color output.

Note: Notice that there is no universal way to detect whether the application is running in a light or dark terminal. As a developer of an command line application, you'll have to make this configurable for the user.

Parameters

- **min_brightness** – Float between 0.0 and 1.0 or a callable that returns a float.
- **max_brightness** – Float between 0.0 and 1.0 or a callable that returns a float.

invalidation_hash() → Hashable

When this changes, the cache should be invalidated.

transform_attrs(attrs: [prompt_toolkit.styles.base.Attrs](#)) → [prompt_toolkit.styles.base.Attrs](#)

Take an *Attrs* object and return a new *Attrs* object.

Remember that the color formats can be either “ansi...” or a 6 digit lowercase hexadecimal color (without ‘#’ prefix).

class [prompt_toolkit.styles.Attrs](#)(color, bgcolor, bold, underline, strike, italic, blink, reverse, hidden)

property **bgcolor**

Alias for field number 1

property **blink**

Alias for field number 6

property **bold**

Alias for field number 2

property **color**

Alias for field number 0

property **hidden**

Alias for field number 8

property **italic**

Alias for field number 5

property **reverse**

Alias for field number 7

property **strike**

Alias for field number 4

property **underline**

Alias for field number 3

class [prompt_toolkit.styles.BaseStyle](#)

Abstract base class for [prompt_toolkit](#) styles.

abstract **get_attrs_for_style_str**(style_str: str, default: [prompt_toolkit.styles.base.Attrs](#) = [Attrs](#)(color="", bgcolor="", bold=False, underline=False, strike=False, italic=False, blink=False, reverse=False, hidden=False)) → [prompt_toolkit.styles.base.Attrs](#)

Return [Attrs](#) for the given style string.

Parameters

- **style_str** – The style string. This can contain inline styling as well as classnames (e.g. “class:title”).
- **default** – *Attrs* to be used if no styling was defined.

abstract **invalidation_hash**() → Hashable

Invalidation hash for the style. When this changes over time, the renderer knows that something in the style changed, and that everything has to be redrawn.

abstract **property** **style_rules**: List[Tuple[str, str]]

The list of style rules, used to create this style. (Required for *DynamicStyle* and *_MergedStyle* to work.)

```
class prompt_toolkit.styles.ConditionalStyleTransformation(style_transformation:
    prompt_toolkit.styles.style_transformation.StyleTransformation,
    filter:
        Union[prompt_toolkit.filters.base.Filter,
        bool])
```

Apply the style transformation depending on a condition.

invalidation_hash() → Hashable

When this changes, the cache should be invalidated.

transform_attrs(*attrs*: prompt_toolkit.styles.base.Attrs) → prompt_toolkit.styles.base.Attrs

Take an *Attrs* object and return a new *Attrs* object.

Remember that the color formats can be either “ansi...” or a 6 digit lowercase hexadecimal color (without ‘#’ prefix).

```
class prompt_toolkit.styles.DummyStyle
```

A style that doesn’t style anything.

```
get_attrs_for_style_str(style_str: str, default: prompt_toolkit.styles.base.Attrs = Attrs(color="",
    bgcolor="", bold=False, underline=False, strike=False, italic=False,
    blink=False, reverse=False, hidden=False)) →
    prompt_toolkit.styles.base.Attrs
```

Return *Attrs* for the given style string.

Parameters

- **style_str** – The style string. This can contain inline styling as well as classnames (e.g. “class:title”).
- **default** – *Attrs* to be used if no styling was defined.

invalidation_hash() → Hashable

Invalidation hash for the style. When this changes over time, the renderer knows that something in the style changed, and that everything has to be redrawn.

property style_rules: List[Tuple[str, str]]

The list of style rules, used to create this style. (Required for *DynamicStyle* and *_MergedStyle* to work.)

```
class prompt_toolkit.styles.DummyStyleTransformation
```

Don’t transform anything at all.

invalidation_hash() → Hashable

When this changes, the cache should be invalidated.

transform_attrs(*attrs*: prompt_toolkit.styles.base.Attrs) → prompt_toolkit.styles.base.Attrs

Take an *Attrs* object and return a new *Attrs* object.

Remember that the color formats can be either “ansi...” or a 6 digit lowercase hexadecimal color (without ‘#’ prefix).

```
class prompt_toolkit.styles.DynamicStyle(get_style: Callable[[],
    Optional[prompt_toolkit.styles.base.BaseStyle]])
```

Style class that can dynamically returns an other *Style*.

Parameters **get_style** – Callable that returns a *Style* instance.

```
get_attrs_for_style_str(style_str: str, default: prompt_toolkit.styles.base.Attrs = Attrs(color="",
    bgcolor="", bold=False, underline=False, strike=False, italic=False,
    blink=False, reverse=False, hidden=False)) →
    prompt_toolkit.styles.base.Attrs
```

Return *Attrs* for the given style string.

Parameters

- **style_str** – The style string. This can contain inline styling as well as classnames (e.g. “class:title”).
- **default** – *Attrs* to be used if no styling was defined.

invalidation_hash() → Hashable

Invalidation hash for the style. When this changes over time, the renderer knows that something in the style changed, and that everything has to be redrawn.

property style_rules: List[Tuple[str, str]]

The list of style rules, used to create this style. (Required for *DynamicStyle* and *_MergedStyle* to work.)

class prompt_toolkit.styles.**DynamicStyleTransformation**(*get_style_transformation: Callable[[], Optional[prompt_toolkit.styles.style_transformation.StyleTransformation]*)

StyleTransformation class that can dynamically returns any *StyleTransformation*.

Parameters **get_style_transformation** – Callable that returns a *StyleTransformation* instance.

invalidation_hash() → Hashable

When this changes, the cache should be invalidated.

transform_attrs(*attrs: prompt_toolkit.styles.base.Attrs*) → *prompt_toolkit.styles.base.Attrs*

Take an *Attrs* object and return a new *Attrs* object.

Remember that the color formats can be either “ansi...” or a 6 digit lowercase hexadecimal color (without ‘#’ prefix).

class prompt_toolkit.styles.**Priority**(*value*)

The priority of the rules, when a style is created from a dictionary.

In a *Style*, rules that are defined later will always override previous defined rules, however in a dictionary, the key order was arbitrary before Python 3.6. This means that the style could change at random between rules.

We have two options:

- **DICT_KEY_ORDER:** This means, iterate through the dictionary, and take the key/value pairs in order as they come. This is a good option if you have Python >3.6. Rules at the end will override rules at the beginning.
- **MOST_PRECISE:** keys that are defined with most precision will get higher priority. (More precise means: more elements.)

class prompt_toolkit.styles.**Style**(*style_rules: List[Tuple[str, str]]*)

Create a *Style* instance from a list of style rules.

The *style_rules* is supposed to be a list of (‘classnames’, ‘style’) tuples. The classnames are a whitespace separated string of class names and the style string is just like a Pygments style definition, but with a few additions: it supports ‘reverse’ and ‘blink’.

Later rules always override previous rules.

Usage:

```
Style([
    ('title', '#ff0000 bold underline'),
    ('something-else', 'reverse'),
    ('class1 class2', 'reverse'),
])
```

The `from_dict` classmethod is similar, but takes a dictionary as input.

```
classmethod from_dict(style_dict: Dict[str, str], priority: prompt_toolkit.styles.style.Priority =
    Priority.DICT_KEY_ORDER) → prompt_toolkit.styles.style.Style
```

Parameters

- **style_dict** – Style dictionary.
- **priority** – Priority value.

```
get_attrs_for_style_str(style_str: str, default: prompt_toolkit.styles.base.Attrs = Attrs(color="",
    bgcolor="", bold=False, underline=False, strike=False, italic=False,
    blink=False, reverse=False, hidden=False)) →
    prompt_toolkit.styles.base.Attrs
```

Get *Attrs* for the given style string.

```
invalidation_hash() → Hashable
```

Invalidation hash for the style. When this changes over time, the renderer knows that something in the style changed, and that everything has to be redrawn.

```
property style_rules: List[Tuple[str, str]]
```

The list of style rules, used to create this style. (Required for *DynamicStyle* and *_MergedStyle* to work.)

```
class prompt_toolkit.styles.StyleTransformation
```

Base class for any style transformation.

```
invalidation_hash() → Hashable
```

When this changes, the cache should be invalidated.

```
abstract transform_attrs(attrs: prompt_toolkit.styles.base.Attrs) → prompt_toolkit.styles.base.Attrs
```

Take an *Attrs* object and return a new *Attrs* object.

Remember that the color formats can be either “ansi...” or a 6 digit lowercase hexadecimal color (without ‘#’ prefix).

```
class prompt_toolkit.styles.SwapLightAndDarkStyleTransformation
```

Turn dark colors into light colors and the other way around.

This is meant to make color schemes that work on a dark background usable on a light background (and the other way around).

Notice that this doesn’t swap foreground and background like “reverse” does. It turns light green into dark green and the other way around. Foreground and background colors are considered individually.

Also notice that when <reverse> is used somewhere and no colors are given in particular (like what is the default for the bottom toolbar), then this doesn’t change anything. This is what makes sense, because when the ‘default’ color is chosen, it’s what works best for the terminal, and reverse works good with that.

```
transform_attrs(attrs: prompt_toolkit.styles.base.Attrs) → prompt_toolkit.styles.base.Attrs
```

Return the *Attrs* used when opposite luminosity should be used.

```
prompt_toolkit.styles.merge_style_transformations(style_transformations: Se-
```

```
quence[prompt_toolkit.styles.style_transformation.StyleTransformation]
    →
```

```
    prompt_toolkit.styles.style_transformation.StyleTransformation
```

Merge multiple transformations together.

```
prompt_toolkit.styles.merge_styles(styles: List[prompt_toolkit.styles.base.BaseStyle]) →
```

```
    prompt_toolkit.styles.style._MergedStyle
```

Merge multiple *Style* objects.

```
prompt_toolkit.styles.pygments_token_to_classname(token: Token) → str
```

Turn e.g. *Token.Name.Exception* into ‘*pygments.name.exception*’.

(Our Pygments lexer will also turn the tokens that pygments produces in a `prompt_toolkit` list of fragments that match these styling rules.)

`prompt_toolkit.styles.style_from_pygments_cls`(*pygments_style_cls: Type[PygmentsStyle]*) → *prompt_toolkit.styles.style.Style*

Shortcut to create a *Style* instance from a Pygments style class and a style dictionary.

Example:

```
from prompt_toolkit.styles.from_pygments import style_from_pygments_cls
from pygments.styles import get_style_by_name
style = style_from_pygments_cls(get_style_by_name('monokai'))
```

Parameters *pygments_style_cls* – Pygments style class to start from.

`prompt_toolkit.styles.style_from_pygments_dict`(*pygments_dict: Dict[Token, str]*) → *prompt_toolkit.styles.style.Style*

Create a *Style* instance from a Pygments style dictionary. (One that maps Token objects to style strings.)

3.11.12 Shortcuts

`class prompt_toolkit.shortcuts.CompleteStyle`(*value*)

How to display autocompletions for the prompt.

`class prompt_toolkit.shortcuts.ProgressBar`(*title: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None, formatters: Optional[Sequence[prompt_toolkit.shortcuts.progress_bar.formatters.Formatter]] = None, bottom_toolbar: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None, style: Optional[prompt_toolkit.styles.base.BaseStyle] = None, key_bindings: Optional[prompt_toolkit.key_binding.key_bindings.KeyBindings] = None, file: Optional[TextIO] = None, color_depth: Optional[prompt_toolkit.output.color_depth.ColorDepth] = None, output: Optional[prompt_toolkit.output.base.Output] = None, input: Optional[prompt_toolkit.input.base.Input] = None)*

Progress bar context manager.

Usage

```
with ProgressBar(...) as pb:
    for item in pb(data):
        ...
```

Parameters

- **title** – Text to be displayed above the progress bars. This can be a callable or formatted text as well.
- **formatters** – List of *Formatter* instances.

- **bottom_toolbar** – Text to be displayed in the bottom toolbar. This can be a callable or formatted text.
- **style** – *prompt_toolkit.styles.BaseStyle* instance.
- **key_bindings** – *KeyBindings* instance.
- **file** – The file object used for rendering, by default *sys.stderr* is used.
- **color_depth** – *prompt_toolkit.ColorDepth* instance.
- **output** – *Output* instance.
- **input** – *Input* instance.

```
class prompt_toolkit.shortcuts.PromptSession(message: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = "", *, multiline:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
wrap_lines: Union[prompt_toolkit.filters.base.Filter,
bool] = True, is_password:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
vi_mode: bool = False, editing_mode:
prompt_toolkit.enums.EditingMode =
EditingMode.EMACS, complete_while_typing:
Union[prompt_toolkit.filters.base.Filter, bool] = True,
validate_while_typing:
Union[prompt_toolkit.filters.base.Filter, bool] = True,
enable_history_search:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
search_ignore_case:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
lexer: Optional[prompt_toolkit.lexers.base.Lexer] =
None, enable_system_prompt:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
enable_suspend: Union[prompt_toolkit.filters.base.Filter,
bool] = False, enable_open_in_editor:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
validator: Optional[prompt_toolkit.validation.Validator]
= None, completer:
Optional[prompt_toolkit.completion.base.Completer] =
None, complete_in_thread: bool = False,
reserve_space_for_menu: int = 8, complete_style:
prompt_toolkit.shortcuts.prompt.CompleteStyle =
CompleteStyle.COLUMN, auto_suggest:
Optional[prompt_toolkit.auto_suggest.AutoSuggest] =
None, style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None,
style_transformation: Op-
tional[prompt_toolkit.styles.style_transformation.StyleTransformation]
= None, swap_light_and_dark_colors:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
color_depth:
Optional[prompt_toolkit.output.color_depth.ColorDepth]
= None, cursor: Op-
tional[Union[prompt_toolkit.cursor_shapes.CursorShape,
prompt_toolkit.cursor_shapes.CursorShapeConfig]] =
None, include_default_pygments_style:
Union[prompt_toolkit.filters.base.Filter, bool] = True,
history: Optional[prompt_toolkit.history.History] =
None, clipboard:
Optional[prompt_toolkit.clipboard.base.Clipboard] =
None, prompt_continuation: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str,
str, Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[int, int, int], Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str,
str, Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]]]]]] = None, rprompt:
Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = None, bottom_toolbar:
Optional[Union[str, MagicFormattedText,
```

This is a wrapper around a lot of `prompt_toolkit` functionality and can be a replacement for `raw_input`.

All parameters that expect “formatted text” can take either just plain text (a unicode object), a list of `(style_str, text)` tuples or an HTML object.

Example usage:

```
s = PromptSession(message='>')
text = s.prompt()
```

Parameters

- **message** – Plain text or formatted text to be shown before the prompt. This can also be a callable that returns formatted text.
- **multiline** – *bool* or *Filter*. When True, prefer a layout that is more adapted for multiline input. Text after newlines is automatically indented, and search/arg input is shown below the input, instead of replacing the prompt.
- **wrap_lines** – *bool* or *Filter*. When True (the default), automatically wrap long lines instead of scrolling horizontally.
- **is_password** – Show asterisks instead of the actual typed characters.
- **editing_mode** – `EditMode.VI` or `EditMode.EMACS`.
- **vi_mode** – *bool*, if True, Identical to `editing_mode=EditMode.VI`.
- **complete_while_typing** – *bool* or *Filter*. Enable autocompletion while typing.
- **validate_while_typing** – *bool* or *Filter*. Enable input validation while typing.
- **enable_history_search** – *bool* or *Filter*. Enable up-arrow parting string matching.
- **search_ignore_case** – *Filter*. Search case insensitive.
- **lexer** – *Lexer* to be used for the syntax highlighting.
- **validator** – *Validator* instance for input validation.
- **completer** – *Completer* instance for input completion.
- **complete_in_thread** – *bool* or *Filter*. Run the completer code in a background thread in order to avoid blocking the user interface. For `CompleteStyle.READLINE_LIKE`, this setting has no effect. There we always run the completions in the main thread.
- **reserve_space_for_menu** – Space to be reserved for displaying the menu. (0 means that no space needs to be reserved.)
- **auto_suggest** – *AutoSuggest* instance for input suggestions.
- **style** – *Style* instance for the color scheme.
- **include_default_pygments_style** – *bool* or *Filter*. Tell whether the default styling for Pygments lexers has to be included. By default, this is true, but it is recommended to be disabled if another Pygments style is passed as the *style* argument, otherwise, two Pygments styles will be merged.
- **style_transformation** – *StyleTransformation* instance.
- **swap_light_and_dark_colors** – *bool* or *Filter*. When enabled, apply `SwapLightAndDarkStyleTransformation`. This is useful for switching between dark and light terminal backgrounds.
- **enable_system_prompt** – *bool* or *Filter*. Pressing Meta+’!’ will show a system prompt.

- **enable_suspend** – *bool* or *Filter*. Enable Control-Z style suspension.
- **enable_open_in_editor** – *bool* or *Filter*. Pressing ‘v’ in Vi mode or C-X C-E in emacs mode will open an external editor.
- **history** – *History* instance.
- **clipboard** – *Clipboard* instance. (e.g. *InMemoryClipboard*)
- **rprompt** – Text or formatted text to be displayed on the right side. This can also be a callable that returns (formatted) text.
- **bottom_toolbar** – Formatted text or callable which is supposed to return formatted text.
- **prompt_continuation** – Text that needs to be displayed for a multiline prompt continuation. This can either be formatted text or a callable that takes a *prompt_width*, *line_number* and *wrap_count* as input and returns formatted text. When this is *None* (the default), then *prompt_width* spaces will be used.
- **complete_style** – `CompleteStyle.COLUMN`, `CompleteStyle.MULTI_COLUMN` or `CompleteStyle.READLINE_LIKE`.
- **mouse_support** – *bool* or *Filter* to enable mouse support.
- **placeholder** – Text to be displayed when no input has been given yet. Unlike the *default* parameter, this won’t be returned as part of the output ever. This can be formatted text or a callable that returns formatted text.
- **refresh_interval** – (number; in seconds) When given, refresh the UI every so many seconds.
- **input** – *Input* object. (Note that the preferred way to change the input/output is by creating an *AppSession*.)
- **output** – *Output* object.

```

prompt(message: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None, *,
editing_mode: Optional[prompt_toolkit.enums.EditingMode] = None, refresh_interval:
Optional[float] = None, vi_mode: Optional[bool] = None, lexer:
Optional[prompt_toolkit.lexers.base.Lexer] = None, completer:
Optional[prompt_toolkit.completion.base.Completer] = None, complete_in_thread: Optional[bool]
= None, is_password: Optional[bool] = None, key_bindings:
Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase] = None, bottom_toolbar:
Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None, style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None, color_depth:
Optional[prompt_toolkit.output.color_depth.ColorDepth] = None, cursor:
Optional[Union[prompt_toolkit.cursor_shapes.CursorShape,
prompt_toolkit.cursor_shapes.CursorShapeConfig]] = None, include_default_pygments_style:
Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None, style_transformation:
Optional[prompt_toolkit.styles.style_transformation.StyleTransformation] = None,
swap_light_and_dark_colors: Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None,
rprompt: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None,
multiline: Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None, prompt_continuation:
Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[int, int, int],
Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]]]]]] = None,
wrap_lines: Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None,
enable_history_search: Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None,
search_ignore_case: Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None,
complete_while_typing: Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None,
validate_while_typing: Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None,
complete_style: Optional[prompt_toolkit.shortcuts.prompt.CompleteStyle] = None, auto_suggest:
Optional[prompt_toolkit.auto_suggest.AutoSuggest] = None, validator:
Optional[prompt_toolkit.validation.Validator] = None, clipboard:
Optional[prompt_toolkit.clipboard.base.Clipboard] = None, mouse_support:
Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None, input_processors:
Optional[List[prompt_toolkit.layout.processors.Processor]] = None, placeholder:
Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None,
reserve_space_for_menu: Optional[int] = None, enable_system_prompt:
Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None, enable_suspend:
Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None, enable_open_in_editor:
Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None, tempfile_suffix:
Optional[Union[str, Callable[[], str]]] = None, tempfile: Optional[Union[str, Callable[[], str]]] =
None, default: Union[str, prompt_toolkit.document.Document] = "", accept_default: bool = False,
pre_run: Optional[Callable[[], None]] = None, set_exception_handler: bool = True, in_thread: bool
= False) → prompt_toolkit.shortcuts.prompt._T

```

Display the prompt.

The first set of arguments is a subset of the `PromptSession` class itself. For these, passing in `None` will keep the current values that are active in the session. Passing in a value will set the attribute for the session, which means that it applies to the current, but also to the next prompts.

Note that in order to erase a `Completer`, `Validator` or `AutoSuggest`, you can't use `None`. Instead pass in a `DummyCompleter`, `DummyValidator` or `DummyAutoSuggest` instance respectively. For a `Lexer` you can pass in an empty `SimpleLexer`.

Additional arguments, specific for this prompt:

Parameters

- **default** – The default input text to be shown. (This can be edited by the user).
- **accept_default** – When *True*, automatically accept the default value without allowing the user to edit the input.
- **pre_run** – Callable, called at the start of *Application.run*.
- **in_thread** – Run the prompt in a background thread; block the current thread. This avoids interference with an event loop in the current thread. Like *Application.run(in_thread=True)*.

This method will raise `KeyboardInterrupt` when control-c has been pressed (for abort) and `EOFError` when control-d has been pressed (for exit).

```
prompt_toolkit.shortcuts.button_dialog(title: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", text: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", buttons: List[Tuple[str,
prompt_toolkit.shortcuts.dialogs._T]] = [], style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None) →
prompt_toolkit.application.application.Application[prompt_toolkit.shortcuts.dialogs
```

Display a dialog with button choices (given as a list of tuples). Return the value associated with button.

```
prompt_toolkit.shortcuts.clear() → None
```

Clear the screen.

```
prompt_toolkit.shortcuts.clear_title() → None
```

Erase the current title.

```
prompt_toolkit.shortcuts.confirm(message: str = 'Confirm?', suffix: str = ' (y/n) ') → bool
```

Display a confirmation prompt that returns True/False.

```
prompt_toolkit.shortcuts.create_confirm_session(message: str, suffix: str = ' (y/n) ') →
prompt_toolkit.shortcuts.prompt.PromptSession[bool]
```

Create a *PromptSession* object for the ‘confirm’ function.

```
prompt_toolkit.shortcuts.input_dialog(title: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", text: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", ok_text: str = 'OK', cancel_text: str =
'Cancel', completer:
Optional[prompt_toolkit.completion.base.Completer] = None,
validator: Optional[prompt_toolkit.validation.Validator] = None,
password: Union[prompt_toolkit.filters.base.Filter, bool] = False,
style: Optional[prompt_toolkit.styles.base.BaseStyle] = None) →
prompt_toolkit.application.application.Application[str]
```

Display a text input box. Return the given text, or None when cancelled.

```
prompt_toolkit.shortcuts.message_dialog(title: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", text: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", ok_text: str = 'Ok', style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None) →
prompt_toolkit.application.application.Application[None]
```

Display a simple message box and wait until the user presses enter.

```
prompt_toolkit.shortcuts.print_formatted_text(*values: Any, sep: str = ' ', end: str = '\n', file:
Optional[TextIO] = None, flush: bool = False, style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None,
output: Optional[prompt_toolkit.output.base.Output] =
None, color_depth: Op-
tional[prompt_toolkit.output.color_depth.ColorDepth]
= None, style_transformation: Op-
tional[prompt_toolkit.styles.style_transformation.StyleTransformation]
= None, include_default_pygments_style: bool = True)
→ None
```

```
print_formatted_text(*values, sep=' ', end='\n', file=None, flush=False, style=None,
↪ output=None)
```

Print text to stdout. This is supposed to be compatible with Python's print function, but supports printing of formatted text. You can pass a *FormattedText*, *HTML* or *ANSI* object to print formatted text.

- Print HTML as follows:

```
print_formatted_text(HTML('<i>Some italic text</i> <ansired>This is red!</
↪ansired>'))

style = Style.from_dict({
    'hello': '#ff0066',
    'world': '#884444 italic',
})
print_formatted_text(HTML('<hello>Hello</hello> <world>world</world>!'),
↪style=style)
```

- Print a list of (style_str, text) tuples in the given style to the output. E.g.:

```
style = Style.from_dict({
    'hello': '#ff0066',
    'world': '#884444 italic',
})
fragments = FormattedText([
    ('class:hello', 'Hello'),
    ('class:world', 'World'),
])
print_formatted_text(fragments, style=style)
```

If you want to print a list of Pygments tokens, wrap it in *PygmentsTokens* to do the conversion.

If a *prompt_toolkit.Application* is currently running, this will always print above the application or prompt (sim-

ilar to `patch_stdout`). So, `print_formatted_text` will erase the current application, print the text, and render the application again.

Parameters

- **values** – Any kind of printable object, or formatted string.
- **sep** – String inserted between values, default a space.
- **end** – String appended after the last value, default a newline.
- **style** – `Style` instance for the color scheme.
- **include_default_pygments_style** – `bool`. Include the default Pygments style when set to `True` (the default).

```
prompt_toolkit.shortcuts.progress_dialog(title: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = "", text: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = "", run_callback:
Callable[[Callable[[int], None], Callable[[str], None]], None]
= <function <lambda>>, style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None) →
prompt_toolkit.application.application.Application[None]
```

Parameters **run_callback** – A function that receives as input a `set_percentage` function and it does the work.

`prompt_toolkit.shortcuts.prompt`(*message*: *Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None*, *, *history*: *Optional[prompt_toolkit.history.History] = None*, *editing_mode*: *Optional[prompt_toolkit.enums.EditingMode] = None*, *refresh_interval*: *Optional[float] = None*, *vi_mode*: *Optional[bool] = None*, *lexer*: *Optional[prompt_toolkit.lexers.base.Lexer] = None*, *completer*: *Optional[prompt_toolkit.completion.base.Completer] = None*, *complete_in_thread*: *Optional[bool] = None*, *is_password*: *Optional[bool] = None*, *key_bindings*: *Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase] = None*, *bottom_toolbar*: *Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None*, *style*: *Optional[prompt_toolkit.styles.base.BaseStyle] = None*, *color_depth*: *Optional[prompt_toolkit.output.color_depth.ColorDepth] = None*, *cursor*: *Optional[Union[prompt_toolkit.cursor_shapes.CursorShape, prompt_toolkit.cursor_shapes.CursorShapeConfig]] = None*, *include_default_pygments_style*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *style_transformation*: *Optional[prompt_toolkit.styles.style_transformation.StyleTransformation] = None*, *swap_light_and_dark_colors*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *rprompt*: *Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None*, *multiline*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *prompt_continuation*: *Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[int, int, int], Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]]]]]] = None*, *wrap_lines*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *enable_history_search*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *search_ignore_case*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *complete_while_typing*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *validate_while_typing*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *complete_style*: *Optional[prompt_toolkit.shortcuts.prompt.CompleteStyle] = None*, *auto_suggest*: *Optional[prompt_toolkit.auto_suggest.AutoSuggest] = None*, *validator*: *Optional[prompt_toolkit.validation.Validator] = None*, *clipboard*: *Optional[prompt_toolkit.clipboard.base.Clipboard] = None*, *mouse_support*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *input_processors*: *Optional[List[prompt_toolkit.layout.processors.Processor]] = None*, *placeholder*: *Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]] = None*, *reserve_space_for_menu*: *Optional[int] = None*, *enable_system_prompt*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *enable_suspend*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*, *enable_open_in_editor*: *Optional[Union[prompt_toolkit.filters.base.Filter, bool]] = None*,

The first set of arguments is a subset of the `PromptSession` class itself. For these, passing in `None` will keep the current values that are active in the session. Passing in a value will set the attribute for the session, which means that it applies to the current, but also to the next prompts.

Note that in order to erase a `Completer`, `Validator` or `AutoSuggest`, you can't use `None`. Instead pass in a `DummyCompleter`, `DummyValidator` or `DummyAutoSuggest` instance respectively. For a `Lexer` you can pass in an empty `SimpleLexer`.

Additional arguments, specific for this prompt:

Parameters

- **default** – The default input text to be shown. (This can be edited by the user).
- **accept_default** – When `True`, automatically accept the default value without allowing the user to edit the input.
- **pre_run** – Callable, called at the start of `Application.run`.
- **in_thread** – Run the prompt in a background thread; block the current thread. This avoids interference with an event loop in the current thread. Like `Application.run(in_thread=True)`.

This method will raise `KeyboardInterrupt` when control-c has been pressed (for abort) and `EOFError` when control-d has been pressed (for exit).

```
prompt_toolkit.shortcuts.radiolist_dialog(title: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = "", text: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = "", ok_text: str = 'Ok',
cancel_text: str = 'Cancel', values: Op-
tional[Sequence[Tuple[prompt_toolkit.shortcuts.dialogs._T,
Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]]]]] = None, default:
Optional[prompt_toolkit.shortcuts.dialogs._T] = None, style:
Optional[prompt_toolkit.styles.base.BaseStyle] = None) →
prompt_toolkit.application.application.Application[prompt_toolkit.shortcuts.dia
```

Display a simple list of element the user can choose amongst.

Only one element can be selected at a time using Arrow keys and Enter. The focus can be moved between the list and the Ok/Cancel button with tab.

```
prompt_toolkit.shortcuts.set_title(text: str) → None
Set the terminal title.
```

```
prompt_toolkit.shortcuts.yes_no_dialog(title: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", text: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]] = "", yes_text: str = 'Yes', no_text: str = 'No',
style: Optional[prompt_toolkit.styles.base.BaseStyle] = None) →
prompt_toolkit.application.application.Application[bool]
```

Display a Yes/No dialog. Return a boolean.

Formatter classes for the progress bar. Each progress bar consists of a list of these formatters.

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Bar(start: str = '[', end: str = ']', sym_a: str
                                                         = '=', sym_b: str = '>', sym_c: str = ' ',
                                                         unknown: str = '#')
```

Display the progress bar itself.

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Formatter
    Base class for any formatter.
```

```
class prompt_toolkit.shortcuts.progress_bar.formatters.IterationsPerSecond
    Display the iterations per second.
```

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Label(width: Union[None, int,
                                                                    prompt_toolkit.layout.dimension.Dimension,
                                                                    Callable[[], Any]] = None, suffix:
                                                                    str = "")
```

Display the name of the current task.

Parameters

- **width** – If a *width* is given, use this width. Scroll the text if it doesn't fit in this width.
- **suffix** – String suffix to be added after the task name, e.g. ': '. If no task name was given, no suffix will be added.

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Percentage
    Display the progress as a percentage.
```

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Progress
    Display the progress as text. E.g. "8/20"
```

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Rainbow(formatter:
                                                                prompt_toolkit.shortcuts.progress_bar.formatters.Formatter)
```

For the fun. Add rainbow colors to any of the other formatters.

```
class prompt_toolkit.shortcuts.progress_bar.formatters.SpinningWheel
    Display a spinning wheel.
```

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Text(text: Optional[Union[str,
                                                                    MagicFormattedText,
                                                                    List[Union[Tuple[str, str], Tuple[str,
                                                                    str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    None]]], Callable[[], Any]]], style:
                                                                    str = "")
```

Display plain text.

```
class prompt_toolkit.shortcuts.progress_bar.formatters.TimeElapsed
    Display the elapsed time.
```

```
class prompt_toolkit.shortcuts.progress_bar.formatters.TimeLeft
    Display the time left.
```

```
prompt_toolkit.shortcuts.progress_bar.formatters.create_default_formatters() →
                                                                    List[prompt_toolkit.shortcuts.progress_bar.formatters.Formatter]
```

Return the list of default formatters.

3.11.13 Validation

Input validation for a *Buffer*. (Validators will be called before accepting input.)

```
class prompt_toolkit.validation.ConditionalValidator(validator: prompt_toolkit.validation.Validator,
                                                    filter: Union[prompt_toolkit.filters.base.Filter,
                                                            bool])
```

Validator that can be switched on/off according to a filter. (This wraps around another validator.)

validate(document: prompt_toolkit.document.Document) → None

Validate the input. If invalid, this should raise a *ValidationError*.

Parameters **document** – *Document* instance.

```
class prompt_toolkit.validation.DummyValidator
```

Validator class that accepts any input.

validate(document: prompt_toolkit.document.Document) → None

Validate the input. If invalid, this should raise a *ValidationError*.

Parameters **document** – *Document* instance.

```
class prompt_toolkit.validation.DynamicValidator(get_validator: Callable[[],
                                                                           Optional[prompt_toolkit.validation.Validator]])
```

Validator class that can dynamically returns any *Validator*.

Parameters **get_validator** – Callable that returns a *Validator* instance.

validate(document: prompt_toolkit.document.Document) → None

Validate the input. If invalid, this should raise a *ValidationError*.

Parameters **document** – *Document* instance.

```
async validate_async(document: prompt_toolkit.document.Document) → None
```

Return a *Future* which is set when the validation is ready. This function can be overloaded in order to provide an asynchronous implementation.

```
class prompt_toolkit.validation.ThreadedValidator(validator: prompt_toolkit.validation.Validator)
```

Wrapper that runs input validation in a thread. (Use this to prevent the user interface from becoming unresponsive if the input validation takes too much time.)

validate(document: prompt_toolkit.document.Document) → None

Validate the input. If invalid, this should raise a *ValidationError*.

Parameters **document** – *Document* instance.

```
async validate_async(document: prompt_toolkit.document.Document) → None
```

Run the *validate* function in a thread.

```
exception prompt_toolkit.validation.ValidationError(cursor_position: int = 0, message: str = "")
```

Error raised by *Validator.validate()*.

Parameters

- **cursor_position** – The cursor position where the error occurred.
- **message** – Text.

```
class prompt_toolkit.validation.Validator
```

Abstract base class for an input validator.

A validator is typically created in one of the following two ways:

- Either by overriding this class and implementing the *validate* method.

- Or by passing a callable to `Validator.from_callable`.

If the validation takes some time and needs to happen in a background thread, this can be wrapped in a `ThreadedValidator`.

classmethod `from_callable`(`validate_func`: Callable[[str], bool], `error_message`: str = 'Invalid input', `move_cursor_to_end`: bool = False) → `prompt_toolkit.validation.Validator`

Create a validator from a simple validate callable. E.g.:

```
def is_valid(text):
    return text in ['hello', 'world']
Validator.from_callable(is_valid, error_message='Invalid input')
```

Parameters

- **validate_func** – Callable that takes the input string, and returns `True` if the input is valid input.
- **error_message** – Message to be displayed if the input is invalid.
- **move_cursor_to_end** – Move the cursor to the end of the input, if the input is invalid.

abstract `validate`(`document`: `prompt_toolkit.document.Document`) → None

Validate the input. If invalid, this should raise a `ValidationError`.

Parameters `document` – `Document` instance.

async `validate_async`(`document`: `prompt_toolkit.document.Document`) → None

Return a `Future` which is set when the validation is ready. This function can be overloaded in order to provide an asynchronous implementation.

3.11.14 Auto suggestion

Fish-style like auto-suggestion.

While a user types input in a certain buffer, suggestions are generated (asynchronously.) Usually, they are displayed after the input. When the cursor presses the right arrow and the cursor is at the end of the input, the suggestion will be inserted.

If you want the auto suggestions to be asynchronous (in a background thread), because they take too much time, and could potentially block the event loop, then wrap the `AutoSuggest` instance into a `ThreadedAutoSuggest`.

class `prompt_toolkit.auto_suggest.AutoSuggest`

Base class for auto suggestion implementations.

abstract `get_suggestion`(`buffer`: `Buffer`, `document`: `prompt_toolkit.document.Document`) → Optional[`prompt_toolkit.auto_suggest.Suggestion`]

Return `None` or a `Suggestion` instance.

We receive both `Buffer` and `Document`. The reason is that auto suggestions are retrieved asynchronously. (Like completions.) The buffer text could be changed in the meantime, but `document` contains the buffer document like it was at the start of the auto suggestion call. So, from here, don't access `buffer.text`, but use `document.text` instead.

Parameters

- **buffer** – The `Buffer` instance.
- **document** – The `Document` instance.

```
async get_suggestion_async(buff: Buffer, document: prompt_toolkit.document.Document) →  
    Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Return a `Future` which is set when the suggestions are ready. This function can be overloaded in order to provide an asynchronous implementation.

```
class prompt_toolkit.auto_suggest.AutoSuggestFromHistory
```

Give suggestions based on the lines in the history.

```
get_suggestion(buffer: Buffer, document: prompt_toolkit.document.Document) →  
    Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Return `None` or a `Suggestion` instance.

We receive both `Buffer` and `Document`. The reason is that auto suggestions are retrieved asynchronously. (Like completions.) The buffer text could be changed in the meantime, but `document` contains the buffer document like it was at the start of the auto suggestion call. So, from here, don't access `buffer.text`, but use `document.text` instead.

Parameters

- **buffer** – The `Buffer` instance.
- **document** – The `Document` instance.

```
class prompt_toolkit.auto_suggest.ConditionalAutoSuggest(auto_suggest:  
    prompt_toolkit.auto_suggest.AutoSuggest,  
    filter: Union[bool,  
        prompt_toolkit.filters.base.Filter])
```

Auto suggest that can be turned on and of according to a certain condition.

```
get_suggestion(buffer: Buffer, document: prompt_toolkit.document.Document) →  
    Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Return `None` or a `Suggestion` instance.

We receive both `Buffer` and `Document`. The reason is that auto suggestions are retrieved asynchronously. (Like completions.) The buffer text could be changed in the meantime, but `document` contains the buffer document like it was at the start of the auto suggestion call. So, from here, don't access `buffer.text`, but use `document.text` instead.

Parameters

- **buffer** – The `Buffer` instance.
- **document** – The `Document` instance.

```
class prompt_toolkit.auto_suggest.DummyAutoSuggest
```

AutoSuggest class that doesn't return any suggestion.

```
get_suggestion(buffer: Buffer, document: prompt_toolkit.document.Document) →  
    Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Return `None` or a `Suggestion` instance.

We receive both `Buffer` and `Document`. The reason is that auto suggestions are retrieved asynchronously. (Like completions.) The buffer text could be changed in the meantime, but `document` contains the buffer document like it was at the start of the auto suggestion call. So, from here, don't access `buffer.text`, but use `document.text` instead.

Parameters

- **buffer** – The `Buffer` instance.
- **document** – The `Document` instance.

```
class prompt_toolkit.auto_suggest.DynamicAutoSuggest(get_auto_suggest: Callable[[], Optional[prompt_toolkit.auto_suggest.AutoSuggest]])
```

Validator class that can dynamically returns any Validator.

Parameters `get_validator` – Callable that returns a *Validator* instance.

```
get_suggestion(buff: Buffer, document: prompt_toolkit.document.Document) → Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Return *None* or a *Suggestion* instance.

We receive both *Buffer* and *Document*. The reason is that auto suggestions are retrieved asynchronously. (Like completions.) The buffer text could be changed in the meantime, but `document` contains the buffer document like it was at the start of the auto suggestion call. So, from here, don't access `buffer.text`, but use `document.text` instead.

Parameters

- **buffer** – The *Buffer* instance.
- **document** – The *Document* instance.

```
async get_suggestion_async(buff: Buffer, document: prompt_toolkit.document.Document) → Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Return a *Future* which is set when the suggestions are ready. This function can be overloaded in order to provide an asynchronous implementation.

```
class prompt_toolkit.auto_suggest.Suggestion(text: str)
```

Suggestion returned by an auto-suggest algorithm.

Parameters `text` – The suggestion text.

```
class prompt_toolkit.auto_suggest.ThreadedAutoSuggest(auto_suggest: prompt_toolkit.auto_suggest.AutoSuggest)
```

Wrapper that runs auto suggestions in a thread. (Use this to prevent the user interface from becoming unresponsive if the generation of suggestions takes too much time.)

```
get_suggestion(buff: Buffer, document: prompt_toolkit.document.Document) → Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Return *None* or a *Suggestion* instance.

We receive both *Buffer* and *Document*. The reason is that auto suggestions are retrieved asynchronously. (Like completions.) The buffer text could be changed in the meantime, but `document` contains the buffer document like it was at the start of the auto suggestion call. So, from here, don't access `buffer.text`, but use `document.text` instead.

Parameters

- **buffer** – The *Buffer* instance.
- **document** – The *Document* instance.

```
async get_suggestion_async(buff: Buffer, document: prompt_toolkit.document.Document) → Optional[prompt_toolkit.auto_suggest.Suggestion]
```

Run the `get_suggestion` function in a thread.

3.11.15 Renderer

Renders the command line on the console. (Redraws parts of the input line that were changed.)

```
class prompt_toolkit.renderer.Renderer(style: prompt_toolkit.styles.base.BaseStyle, output:
    prompt_toolkit.output.base.Output, full_screen: bool = False,
    mouse_support: Union[prompt_toolkit.filters.base.Filter, bool] =
    False, cpr_not_supported_callback: Optional[Callable[[],
    None]] = None)
```

Typical usage:

```
output = Vt100_Output.from_pty(sys.stdout)
r = Renderer(style, output)
r.render(app, layout=...)
```

clear() → None

Clear screen and go to 0,0

erase(leave_alternate_screen: bool = True) → None

Hide all output and put the cursor back at the first line. This is for instance used for running a system command (while hiding the CLI) and later resuming the same CLI.)

Parameters **leave_alternate_screen** – When True, and when inside an alternate screen buffer, quit the alternate screen.

property height_is_known: bool

True when the height from the cursor until the bottom of the terminal is known. (It's often nicer to draw bottom toolbars only if the height is known, in order to avoid flickering when the CPR response arrives.)

property last_rendered_screen: Optional[prompt_toolkit.layout.screen.Screen]

The *Screen* class that was generated during the last rendering. This can be *None*.

render(app: Application[Any], layout: Layout, is_done: bool = False) → None

Render the current interface to the output.

Parameters **is_done** – When True, put the cursor at the end of the interface. We won't print any changes to this part.

report_absolute_cursor_row(row: int) → None

To be called when we know the absolute cursor position. (As an answer of a "Cursor Position Request" response.)

request_absolute_cursor_position() → None

Get current cursor position.

We do this to calculate the minimum available height that we can consume for rendering the prompt. This is the available space below the cursor.

For vt100: Do CPR request. (answer will arrive later.) For win32: Do API call. (Answer comes immediately.)

property rows_above_layout: int

Return the number of rows visible in the terminal above the layout.

async wait_for_cpr_responses(timeout: int = 1) → None

Wait for a CPR response.

property waiting_for_cpr: bool

Waiting for CPR flag. True when we send the request, but didn't got a response.

```
prompt_toolkit.renderer.print_formatted_text(output: prompt_toolkit.output.base.Output,
                                             formatted_text: Optional[Union[str, MagicFormattedText,
                                             List[Union[Tuple[str, str], Tuple[str, str,
                                             Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                             None]]], Callable[[], Any]]], style:
                                             prompt_toolkit.styles.base.BaseStyle,
                                             style_transformation: Op-
                                             tional[prompt_toolkit.styles.style_transformation.StyleTransformation]
                                             = None, color_depth:
                                             Optional[prompt_toolkit.output.color_depth.ColorDepth]
                                             = None) → None
```

Print a list of (style_str, text) tuples in the given style to the output.

3.11.16 Lexers

Lexer interface and implementations. Used for syntax highlighting.

```
class prompt_toolkit.lexers.DynamicLexer(get_lexer: Callable[[],
                                                             Optional[prompt_toolkit.lexers.base.Lexer]])
```

Lexer class that can dynamically returns any Lexer.

Parameters `get_lexer` – Callable that returns a *Lexer* instance.

invalidation_hash() → Hashable

When this changes, *lex_document* could give a different output. (Only used for *DynamicLexer*.)

lex_document(*document*: prompt_toolkit.document.Document) → Callable[[int], List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]]

Takes a *Document* and returns a callable that takes a line number and returns a list of (style_str, text) tuples for that line.

XXX: Note that in the past, this was supposed to return a list of (Token, text) tuples, just like a Pygments lexer.

```
class prompt_toolkit.lexers.Lexer
```

Base class for all lexers.

invalidation_hash() → Hashable

When this changes, *lex_document* could give a different output. (Only used for *DynamicLexer*.)

abstract lex_document(*document*: prompt_toolkit.document.Document) → Callable[[int], List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]]

Takes a *Document* and returns a callable that takes a line number and returns a list of (style_str, text) tuples for that line.

XXX: Note that in the past, this was supposed to return a list of (Token, text) tuples, just like a Pygments lexer.

```
class prompt_toolkit.lexers.PygmentsLexer(pygments_lexer_cls: Type[PygmentsLexerCls],
                                           sync_from_start: Union[prompt_toolkit.filters.base.Filter,
                                           bool] = True, syntax_sync:
                                           Optional[prompt_toolkit.lexers.pygments.SyntaxSync] =
                                           None)
```

Lexer that calls a pygments lexer.

Example:

```
from pygments.lexers.html import HtmlLexer
lexer = PygmentsLexer(HtmlLexer)
```

Note: Don't forget to also load a Pygments compatible style. E.g.:

```
from prompt_toolkit.styles.from_pygments import style_from_pygments_cls
from pygments.styles import get_style_by_name
style = style_from_pygments_cls(get_style_by_name('monokai'))
```

Parameters

- **pygments_lexer_cls** – A *Lexer* from Pygments.
- **sync_from_start** – Start lexing at the start of the document. This will always give the best results, but it will be slow for bigger documents. (When the last part of the document is display, then the whole document will be lexed by Pygments on every key stroke.) It is recommended to disable this for inputs that are expected to be more than 1,000 lines.
- **syntax_sync** – *SyntaxSync* object.

classmethod from_filename(filename: str, sync_from_start: Union[prompt_toolkit.filters.base.Filter, bool] = True) → *prompt_toolkit.lexers.base.Lexer*

Create a *Lexer* from a filename.

lex_document(document: prompt_toolkit.document.Document) → Callable[[int], List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]]

Create a lexer function that takes a line number and returns the list of (style_str, text) tuples as the Pygments lexer returns for that line.

class prompt_toolkit.lexers.RegexSync(pattern: str)

Synchronize by starting at a line that matches the given regex pattern.

classmethod from_pygments_lexer_cls(lexer_cls: PygmentsLexerCls) → *RegexSync*

Create a *RegexSync* instance for this Pygments lexer class.

get_sync_start_position(document: prompt_toolkit.document.Document, lineno: int) → Tuple[int, int]

Scan backwards, and find a possible position to start.

class prompt_toolkit.lexers.SimpleLexer(style: str = "")

Lexer that doesn't do any tokenizing and returns the whole input as one token.

Parameters **style** – The style string for this lexer.

lex_document(document: prompt_toolkit.document.Document) → Callable[[int], List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]]

Takes a *Document* and returns a callable that takes a line number and returns a list of (style_str, text) tuples for that line.

XXX: Note that in the past, this was supposed to return a list of (Token, text) tuples, just like a Pygments lexer.

class prompt_toolkit.lexers.SyncFromStart

Always start the syntax highlighting from the beginning.

get_sync_start_position(document: prompt_toolkit.document.Document, lineno: int) → Tuple[int, int]

Return the position from where we can start lexing as a (row, column) tuple.

Parameters

- **document** – *Document* instance that contains all the lines.

- **lineno** – The line that we want to highlight. (We need to return this line, or an earlier position.)

class `prompt_toolkit.lexers.SyntaxSync`

Syntax synchroniser. This is a tool that finds a start position for the lexer. This is especially important when editing big documents; we don't want to start the highlighting by running the lexer from the beginning of the file. That is very slow when editing.

abstract `get_sync_start_position`(*document*: `prompt_toolkit.document.Document`, *lineno*: `int`) → `Tuple[int, int]`

Return the position from where we can start lexing as a (row, column) tuple.

Parameters

- **document** – *Document* instance that contains all the lines.
- **lineno** – The line that we want to highlight. (We need to return this line, or an earlier position.)

3.11.17 Layout

Command line layout definitions

The layout of a command line interface is defined by a *Container* instance. There are two main groups of classes here. Containers and controls:

- A container can contain other containers or controls, it can have multiple children and it decides about the dimensions.
- A control is responsible for rendering the actual content to a screen. A control can propose some dimensions, but it's the container who decides about the dimensions – or when the control consumes more space – which part of the control will be visible.

Container classes:

```
- Container (Abstract base class)
  |- HSplit (Horizontal split)
  |- VSplit (Vertical split)
  |- FloatContainer (Container which can also contain menus and other floats)
  ` - Window (Container which contains one actual control)
```

Control classes:

```
- UIControl (Abstract base class)
  |- FormattedTextControl (Renders formatted text, or a simple list of text fragments)
  ` - BufferControl (Renders an input buffer.)
```

Usually, you end up wrapping every control inside a *Window* object, because that's the only way to render it in a layout.

There are some prepared toolbars which are ready to use:

```
- SystemToolbar (Shows the 'system' input buffer, for entering system commands.)
- ArgToolbar (Shows the input 'arg', for repetition of input commands.)
- SearchToolbar (Shows the 'search' input buffer, for incremental search.)
- CompletionsToolbar (Shows the completions of the current buffer.)
- ValidationToolbar (Shows validation errors of the current buffer.)
```

And one prepared menu:

- CompletionsMenu

The layout class itself

```
class prompt_toolkit.layout.Layout(container: Union[prompt_toolkit.layout.containers.Container,
                                                    MagicContainer], focused_element: Optional[Union[str,
                                                    prompt_toolkit.buffer.Buffer,
                                                    prompt_toolkit.layout.controls.UIControl,
                                                    prompt_toolkit.layout.containers.Container, MagicContainer]]) =
    None)
```

The layout for a prompt_toolkit *Application*. This also keeps track of which user control is focused.

Parameters

- **container** – The “root” container for the layout.
- **focused_element** – element to be focused initially. (Can be anything the *focus* function accepts.)

property buffer_has_focus: bool

Return *True* if the currently focused control is a *BufferControl*. (For instance, used to determine whether the default key bindings should be active or not.)

property current_buffer: Optional[prompt_toolkit.buffer.Buffer]

The currently focused *Buffer* or *None*.

property current_control: prompt_toolkit.layout.controls.UIControl

Get the *UIControl* to currently has the focus.

property current_window: prompt_toolkit.layout.containers.Window

Return the *Window* object that is currently focused.

find_all_windows() → Generator[prompt_toolkit.layout.containers.Window, None, None]

Find all the *UIControl* objects in this layout.

focus(value: Union[str, prompt_toolkit.buffer.Buffer, prompt_toolkit.layout.controls.UIControl, prompt_toolkit.layout.containers.Container, MagicContainer]) → None

Focus the given UI element.

value can be either:

- a *UIControl*
- a *Buffer* instance or the name of a *Buffer*
- a *Window*
- Any container object. In this case we will focus the *Window* from this container that was focused most recent, or the very first focusable *Window* of the container.

focus_last() → None

Give the focus to the last focused control.

focus_next() → None

Focus the next visible/focusable Window.

focus_previous() → None

Focus the previous visible/focusable Window.

get_buffer_by_name(buffer_name: str) → Optional[prompt_toolkit.buffer.Buffer]

Look in the layout for a buffer with the given name. Return *None* when nothing was found.

get_focusable_windows() → Iterable[prompt_toolkit.layout.containers.Window]
 Return all the *Window* objects which are focusable (in the ‘modal’ area).

get_parent(container: prompt_toolkit.layout.containers.Container) → Optional[prompt_toolkit.layout.containers.Container]
 Return the parent container for the given container, or *None*, if it wasn’t found.

get_visible_focusable_windows() → List[prompt_toolkit.layout.containers.Window]
 Return a list of *Window* objects that are focusable.

has_focus(value: Union[str, prompt_toolkit.buffer.Buffer, prompt_toolkit.layout.controls.UIControl, prompt_toolkit.layout.containers.Container, MagicContainer]) → bool
 Check whether the given control has the focus. :param value: *UIControl* or *Window* instance.

property is_searching: bool
 True if we are searching right now.

property previous_control: prompt_toolkit.layout.controls.UIControl
 Get the *UIControl* to previously had the focus.

property search_target_buffer_control: Optional[prompt_toolkit.layout.controls.BufferControl]
 Return the *BufferControl* in which we are searching or *None*.

update_parents_relations() → None
 Update child->parent relationships mapping.

walk() → Iterable[prompt_toolkit.layout.containers.Container]
 Walk through all the layout nodes (and their children) and yield them.

walk_through_modal_area() → Iterable[prompt_toolkit.layout.containers.Container]
 Walk through all the containers which are in the current ‘modal’ part of the layout.

class prompt_toolkit.layout.InvalidLayoutError

class prompt_toolkit.layout.walk(container: prompt_toolkit.layout.containers.Container, skip_hidden: bool = False)
 Walk through layout, starting at this container.

Containers

class prompt_toolkit.layout.Container
 Base class for user interface layout.

abstract get_children() → List[prompt_toolkit.layout.containers.Container]
 Return the list of child *Container* objects.

get_key_bindings() → Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]
 Returns a *KeyBindings* object. These bindings become active when any user control in this container has the focus, except if any containers between this container and the focused user control is modal.

is_modal() → bool
 When this container is modal, key bindings from parent containers are not taken into account if a user control in this container is focused.

abstract preferred_height(width: int, max_available_height: int) → prompt_toolkit.layout.dimension.Dimension
 Return a *Dimension* that represents the desired height for this container.

abstract preferred_width(max_available_width: int) → prompt_toolkit.layout.dimension.Dimension
 Return a *Dimension* that represents the desired width for this container.

abstract reset() → None

Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

abstract write_to_screen(screen: [prompt_toolkit.layout.screen.Screen](#), mouse_handlers: [prompt_toolkit.layout.mouse_handlers.MouseHandlers](#), write_position: [prompt_toolkit.layout.screen.WritePosition](#), parent_style: str, erase_bg: bool, z_index: [Optional\[int\]](#)) → None

Write the actual content to the screen.

Parameters

- **screen** – [Screen](#)
- **mouse_handlers** – [MouseHandlers](#).
- **parent_style** – Style string to pass to the [Window](#) object. This will be applied to all content of the windows. [VSplit](#) and [HSplit](#) can use it to pass their style down to the windows that they contain.
- **z_index** – Used for propagating z_index from parent to child.

```
class prompt_toolkit.layout.HSplit(children: Sequence[Union[prompt_toolkit.layout.containers.Container,
    MagicContainer]], window_too_small:
    Optional[prompt_toolkit.layout.containers.Container] = None, align:
    prompt_toolkit.layout.containers.VerticalAlign =
    VerticalAlign.JUSTIFY, padding: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = 0,
    padding_char: Optional[str] = None, padding_style: str = "", width:
    Union[None, int, prompt_toolkit.layout.dimension.Dimension,
    Callable[[], Any]] = None, height: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] =
    None, z_index: Optional[int] = None, modal: bool = False,
    key_bindings:
    Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]
    = None, style: Union[str, Callable[[], str]] = "")
```

Several layouts, one stacked above/under the other.

```
+-----+
|               |
+-----+
|               |
+-----+
```

By default, this doesn't display a horizontal line between the children, but if this is something you need, then create a [HSplit](#) as follows:

```
HSplit(children=[ ... ], padding_char='-',
padding=1, padding_style='#ffff00')
```

Parameters

- **children** – List of child [Container](#) objects.
- **window_too_small** – A [Container](#) object that is displayed if there is not enough space for all the children. By default, this is a “Window too small” message.
- **align** – [VerticalAlign](#) value.
- **width** – When given, use this width instead of looking at the children.

- **height** – When given, use this height instead of looking at the children.
- **z_index** – (int or None) When specified, this can be used to bring element in front of floating elements. *None* means: inherit from parent.
- **style** – A style string.
- **modal** – True or False.
- **key_bindings** – None or a [KeyBindings](#) object.
- **padding** – (*Dimension* or int), size to be used for the padding.
- **padding_char** – Character to be used for filling in the padding.
- **padding_style** – Style to applied to the padding.

preferred_height(width: int, max_available_height: int) → [prompt_toolkit.layout.dimension.Dimension](#)
Return a [Dimension](#) that represents the desired height for this container.

preferred_width(max_available_width: int) → [prompt_toolkit.layout.dimension.Dimension](#)
Return a [Dimension](#) that represents the desired width for this container.

reset() → None
Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

write_to_screen(screen: [prompt_toolkit.layout.screen.Screen](#), mouse_handlers: [prompt_toolkit.layout.mouse_handlers.MouseHandlers](#), write_position: [prompt_toolkit.layout.screen.WritePosition](#), parent_style: str, erase_bg: bool, z_index: Optional[int]) → None
Render the prompt to a *Screen* instance.

Parameters screen – The [Screen](#) class to which the output has to be written.

```
class prompt_toolkit.layout.VSplit(children: Sequence[Union[prompt_toolkit.layout.containers.Container,
    MagicContainer]], window_too_small:
    Optional[prompt_toolkit.layout.containers.Container] = None, align:
    prompt_toolkit.layout.containers.HorizontalAlign =
    HorizontalAlign.JUSTIFY, padding: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = 0,
    padding_char: Optional[str] = None, padding_style: str = "", width:
    Union[None, int, prompt_toolkit.layout.dimension.Dimension,
    Callable[[], Any]] = None, height: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] =
    None, z_index: Optional[int] = None, modal: bool = False,
    key_bindings:
    Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]
    = None, style: Union[str, Callable[[], str]] = "")
```

Several layouts, one stacked left/right of the other.

```
+-----+-----+
|       |       |
|       |       |
|       |       |
+-----+-----+
```

By default, this doesn't display a vertical line between the children, but if this is something you need, then create a *HSplit* as follows:

```
VSplit(children=[ ... ], padding_char='|',
        padding=1, padding_style='#ffff00')
```

Parameters

- **children** – List of child [Container](#) objects.
- **window_too_small** – A [Container](#) object that is displayed if there is not enough space for all the children. By default, this is a “Window too small” message.
- **align** – [HorizontalAlign](#) value.
- **width** – When given, use this width instead of looking at the children.
- **height** – When given, use this height instead of looking at the children.
- **z_index** – (int or None) When specified, this can be used to bring element in front of floating elements. *None* means: inherit from parent.
- **style** – A style string.
- **modal** – True or False.
- **key_bindings** – None or a [KeyBindings](#) object.
- **padding** – ([Dimension](#) or int), size to be used for the padding.
- **padding_char** – Character to be used for filling in the padding.
- **padding_style** – Style to applied to the padding.

preferred_height(width: int, max_available_height: int) → [prompt_toolkit.layout.dimension.Dimension](#)
Return a [Dimension](#) that represents the desired height for this container.

preferred_width(max_available_width: int) → [prompt_toolkit.layout.dimension.Dimension](#)
Return a [Dimension](#) that represents the desired width for this container.

reset() → None
Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

write_to_screen(screen: [prompt_toolkit.layout.screen.Screen](#), mouse_handlers: [prompt_toolkit.layout.mouse_handlers.MouseHandlers](#), write_position: [prompt_toolkit.layout.screen.WritePosition](#), parent_style: str, erase_bg: bool, z_index: Optional[int]) → None
Render the prompt to a [Screen](#) instance.

Parameters screen – The [Screen](#) class to which the output has to be written.

```
class prompt_toolkit.layout.FloatContainer(content: Union[prompt_toolkit.layout.containers.Container,
                                                         MagicContainer], floats: List[Float], modal: bool = False,
                                                         key_bindings: Op-
                                                         tional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]
                                                         = None, style: Union[str, Callable[[], str]] = "", z_index:
                                                         Optional[int] = None)
```

Container which can contain another container for the background, as well as a list of floating containers on top of it.

Example Usage:

```
FloatContainer(content=Window(...),
               floats=[
                   Float(xcursor=True,
                        ycursor=True,
                        content=CompletionsMenu(...))
               ])
```

Parameters **z_index** – (int or None) When specified, this can be used to bring element in front of floating elements. *None* means: inherit from parent. This is the **z_index** for the whole *Float* container as a whole.

get_children() → List[prompt_toolkit.layout.containers.Container]

Return the list of child *Container* objects.

get_key_bindings() → Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]

Returns a *KeyBindings* object. These bindings become active when any user control in this container has the focus, except if any containers between this container and the focused user control is modal.

is_modal() → bool

When this container is modal, key bindings from parent containers are not taken into account if a user control in this container is focused.

preferred_height(width: int, max_available_height: int) → prompt_toolkit.layout.dimension.Dimension

Return the preferred height of the float container. (We don't care about the height of the floats, they should always fit into the dimensions provided by the container.)

preferred_width(max_available_width: int) → prompt_toolkit.layout.dimension.Dimension

Return a *Dimension* that represents the desired width for this container.

reset() → None

Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

write_to_screen(screen: prompt_toolkit.layout.screen.Screen, mouse_handlers:

prompt_toolkit.layout.mouse_handlers.MouseHandlers, write_position:

prompt_toolkit.layout.screen.WritePosition, parent_style: str, erase_bg: bool, z_index:

Optional[int]) → None

Write the actual content to the screen.

Parameters

- **screen** – *Screen*
- **mouse_handlers** – *MouseHandlers*.
- **parent_style** – Style string to pass to the *Window* object. This will be applied to all content of the windows. *VSplit* and *HSplit* can use it to pass their style down to the windows that they contain.
- **z_index** – Used for propagating **z_index** from parent to child.

```
class prompt_toolkit.layout.Float(content: Union[prompt_toolkit.layout.containers.Container,
MagicContainer], top: Optional[int] = None, right: Optional[int] =
None, bottom: Optional[int] = None, left: Optional[int] = None, width:
Optional[Union[int, Callable[[], int]]] = None, height:
Optional[Union[int, Callable[[], int]]] = None, xcursor: bool = False,
ycursor: bool = False, attach_to_window:
Optional[Union[prompt_toolkit.layout.containers.Container,
MagicContainer]] = None, hide_when_covering_content: bool = False,
allow_cover_cursor: bool = False, z_index: int = 1, transparent: bool =
False)
```

Float for use in a *FloatContainer*. Except for the *content* parameter, all other options are optional.

Parameters

- **content** – *Container* instance.
- **width** – *Dimension* or callable which returns a *Dimension*.
- **height** – *Dimension* or callable which returns a *Dimension*.

- **left** – Distance to the left edge of the *FloatContainer*.
- **right** – Distance to the right edge of the *FloatContainer*.
- **top** – Distance to the top of the *FloatContainer*.
- **bottom** – Distance to the bottom of the *FloatContainer*.
- **attach_to_window** – Attach to the cursor from this window, instead of the current window.
- **hide_when_covering_content** – Hide the float when it covers content underneath.
- **allow_cover_cursor** – When *False*, make sure to display the float below the cursor. Not on top of the indicated position.
- **z_index** – Z-index position. For a *Float*, this needs to be at least one. It is relative to the *z_index* of the parent container.
- **transparent** – *Filter* indicating whether this float needs to be drawn transparently.

```
class prompt_toolkit.layout.Window(content: Optional[prompt_toolkit.layout.controls.UIControl] = None,
width: Union[None, int, prompt_toolkit.layout.dimension.Dimension,
Callable[[], Any]] = None, height: Union[None, int,
prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] =
None, z_index: Optional[int] = None, dont_extend_width:
Union[prompt_toolkit.filters.base.Filter, bool] = False,
dont_extend_height: Union[prompt_toolkit.filters.base.Filter, bool] =
False, ignore_content_width: Union[prompt_toolkit.filters.base.Filter,
bool] = False, ignore_content_height:
Union[prompt_toolkit.filters.base.Filter, bool] = False, left_margins:
Optional[Sequence[prompt_toolkit.layout.margins.Margin]] = None,
right_margins:
Optional[Sequence[prompt_toolkit.layout.margins.Margin]] = None,
scroll_offsets:
Optional[prompt_toolkit.layout.containers.ScrollOffsets] = None,
allow_scroll_beyond_bottom: Union[prompt_toolkit.filters.base.Filter,
bool] = False, wrap_lines: Union[prompt_toolkit.filters.base.Filter,
bool] = False, get_vertical_scroll: Optional[Callable[[Window], int]]
= None, get_horizontal_scroll: Optional[Callable[[Window], int]] =
None, always_hide_cursor: Union[prompt_toolkit.filters.base.Filter,
bool] = False, cursorline: Union[prompt_toolkit.filters.base.Filter,
bool] = False, cursorcolumn: Union[prompt_toolkit.filters.base.Filter,
bool] = False, colorcolumns: Union[None,
List[prompt_toolkit.layout.containers.ColorColumn], Callable[[],
List[prompt_toolkit.layout.containers.ColorColumn]]] = None, align:
Union[prompt_toolkit.layout.containers.WindowAlign, Callable[[],
prompt_toolkit.layout.containers.WindowAlign]] =
WindowAlign.LEFT, style: Union[str, Callable[[], str]] = "", char:
Union[None, str, Callable[[], str]] = None, get_line_prefix:
Optional[Callable[[int, int], Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str],
Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
Callable[[], Any]]]]] = None)
```

Container that holds a control.

Parameters

- **content** – *UIControl* instance.
- **width** – *Dimension* instance or callable.

- **height** – *Dimension* instance or callable.
- **z_index** – When specified, this can be used to bring element in front of floating elements.
- **dont_extend_width** – When *True*, don't take up more width than the preferred width reported by the control.
- **dont_extend_height** – When *True*, don't take up more width than the preferred height reported by the control.
- **ignore_content_width** – A *bool* or *Filter* instance. Ignore the *UIContent* width when calculating the dimensions.
- **ignore_content_height** – A *bool* or *Filter* instance. Ignore the *UIContent* height when calculating the dimensions.
- **left_margins** – A list of *Margin* instance to be displayed on the left. For instance: *NumberedMargin* can be one of them in order to show line numbers.
- **right_margins** – Like *left_margins*, but on the other side.
- **scroll_offsets** – *ScrollOffsets* instance, representing the preferred amount of lines/columns to be always visible before/after the cursor. When both top and bottom are a very high number, the cursor will be centered vertically most of the time.
- **allow_scroll_beyond_bottom** – A *bool* or *Filter* instance. When *True*, allow scrolling so far, that the top part of the content is not visible anymore, while there is still empty space available at the bottom of the window. In the Vi editor for instance, this is possible. You will see tildes while the top part of the body is hidden.
- **wrap_lines** – A *bool* or *Filter* instance. When *True*, don't scroll horizontally, but wrap lines instead.
- **get_vertical_scroll** – Callable that takes this window instance as input and returns a preferred vertical scroll. (When this is *None*, the scroll is only determined by the last and current cursor position.)
- **get_horizontal_scroll** – Callable that takes this window instance as input and returns a preferred vertical scroll.
- **always_hide_cursor** – A *bool* or *Filter* instance. When *True*, never display the cursor, even when the user control specifies a cursor position.
- **cursorline** – A *bool* or *Filter* instance. When *True*, display a cursorline.
- **cursorcolumn** – A *bool* or *Filter* instance. When *True*, display a cursorcolumn.
- **colorcolumns** – A list of *ColorColumn* instances that describe the columns to be highlighted, or a callable that returns such a list.
- **align** – *WindowAlign* value or callable that returns an *WindowAlign* value. alignment of content.
- **style** – A style string. Style to be applied to all the cells in this window. (This can be a callable that returns a string.)
- **char** – (string) Character to be used for filling the background. This can also be a callable that returns a character.
- **get_line_prefix** – *None* or a callable that returns formatted text to be inserted before a line. It takes a line number (int) and a *wrap_count* and returns formatted text. This can be used for implementation of line continuations, things like Vim “breakindent” and so on.

get_children() → List[prompt_toolkit.layout.containers.Container]

Return the list of child *Container* objects.

get_key_bindings() → Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]

Returns a *KeyBindings* object. These bindings become active when any user control in this container has the focus, except if any containers between this container and the focused user control is modal.

preferred_height(width: int, max_available_height: int) → prompt_toolkit.layout.dimension.Dimension

Calculate the preferred height for this window.

preferred_width(max_available_width: int) → prompt_toolkit.layout.dimension.Dimension

Calculate the preferred width for this window.

reset() → None

Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

write_to_screen(screen: prompt_toolkit.layout.screen.Screen, mouse_handlers:

prompt_toolkit.layout.mouse_handlers.MouseHandlers, write_position:

prompt_toolkit.layout.screen.WritePosition, parent_style: str, erase_bg: bool, z_index:

Optional[int]) → None

Write window to screen. This renders the user control, the margins and copies everything over to the absolute position at the given screen.

class prompt_toolkit.layout.WindowAlign(value)

Alignment of the Window content.

Note that this is different from *HorizontalAlign* and *VerticalAlign*, which are used for the alignment of the child containers in respectively *VSplit* and *HSplit*.

class prompt_toolkit.layout.ConditionalContainer(content:

Union[prompt_toolkit.layout.containers.Container,
MagicContainer], filter:

Union[prompt_toolkit.filters.base.Filter, bool])

Wrapper around any other container that can change the visibility. The received *filter* determines whether the given container should be displayed or not.

Parameters

- **content** – *Container* instance.
- **filter** – *Filter* instance.

get_children() → List[prompt_toolkit.layout.containers.Container]

Return the list of child *Container* objects.

preferred_height(width: int, max_available_height: int) → prompt_toolkit.layout.dimension.Dimension

Return a *Dimension* that represents the desired height for this container.

preferred_width(max_available_width: int) → prompt_toolkit.layout.dimension.Dimension

Return a *Dimension* that represents the desired width for this container.

reset() → None

Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

write_to_screen(screen: prompt_toolkit.layout.screen.Screen, mouse_handlers:

prompt_toolkit.layout.mouse_handlers.MouseHandlers, write_position:

prompt_toolkit.layout.screen.WritePosition, parent_style: str, erase_bg: bool, z_index:

Optional[int]) → None

Write the actual content to the screen.

Parameters

- **screen** – *Screen*

- **mouse_handlers** – MouseHandlers.
- **parent_style** – Style string to pass to the *Window* object. This will be applied to all content of the windows. *VSplit* and *HSplit* can use it to pass their style down to the windows that they contain.
- **z_index** – Used for propagating *z_index* from parent to child.

```
class prompt_toolkit.layout.DynamicContainer(get_container: Callable[[],
                                           Union[prompt_toolkit.layout.containers.Container,
                                                MagicContainer]])
```

Container class that dynamically returns any Container.

Parameters **get_container** – Callable that returns a *Container* instance or any widget with a `__pt_container__` method.

get_children() → List[prompt_toolkit.layout.containers.Container]
Return the list of child *Container* objects.

get_key_bindings() → Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]
Returns a *KeyBindings* object. These bindings become active when any user control in this container has the focus, except if any containers between this container and the focused user control is modal.

is_modal() → bool
When this container is modal, key bindings from parent containers are not taken into account if a user control in this container is focused.

preferred_height(width: int, max_available_height: int) → prompt_toolkit.layout.dimension.Dimension
Return a *Dimension* that represents the desired height for this container.

preferred_width(max_available_width: int) → prompt_toolkit.layout.dimension.Dimension
Return a *Dimension* that represents the desired width for this container.

reset() → None
Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

write_to_screen(screen: prompt_toolkit.layout.screen.Screen, mouse_handlers: prompt_toolkit.layout.mouse_handlers.MouseHandlers, write_position: prompt_toolkit.layout.screen.WritePosition, parent_style: str, erase_bg: bool, z_index: Optional[int]) → None
Write the actual content to the screen.

Parameters

- **screen** – *Screen*
- **mouse_handlers** – MouseHandlers.
- **parent_style** – Style string to pass to the *Window* object. This will be applied to all content of the windows. *VSplit* and *HSplit* can use it to pass their style down to the windows that they contain.
- **z_index** – Used for propagating *z_index* from parent to child.

```
class prompt_toolkit.layout.ScrollablePane(content: prompt_toolkit.layout.containers.Container,
                                           scroll_offsets:
                                           Optional[prompt_toolkit.layout.containers.ScrollOffsets] =
                                           None, keep_cursor_visible:
                                           Union[prompt_toolkit.filters.base.Filter, bool] = True,
                                           keep_focused_window_visible:
                                           Union[prompt_toolkit.filters.base.Filter, bool] = True,
                                           max_available_height: int = 10000, width: Union[None, int,
                                           prompt_toolkit.layout.dimension.Dimension, Callable[[],
                                           Any]] = None, height: Union[None, int,
                                           prompt_toolkit.layout.dimension.Dimension, Callable[[],
                                           Any]] = None, show_scrollbar:
                                           Union[prompt_toolkit.filters.base.Filter, bool] = True,
                                           display_arrows: Union[prompt_toolkit.filters.base.Filter,
                                           bool] = True, up_arrow_symbol: str = '^',
                                           down_arrow_symbol: str = 'v')
```

Container widget that exposes a larger virtual screen to its content and displays it in a vertical scrollbar region.

Typically this is wrapped in a large *HSplit* container. Make sure in that case to not specify a *height* dimension of the *HSplit*, so that it will scale according to the content.

Note: If you want to display a completion menu for widgets in this *ScrollablePane*, then it's still a good practice to use a *FloatContainer* with a *CompletionsMenu* in a *Float* at the top-level of the layout hierarchy, rather than nesting a *FloatContainer* in this *ScrollablePane*. (Otherwise, it's possible that the completion menu is clipped.)

Parameters

- **content** – The content container.
- **scroll_offset** – Try to keep the cursor within this distance from the top/bottom (left/right offset is not used).
- **keep_cursor_visible** – When *True*, automatically scroll the pane so that the cursor (of the focused window) is always visible.
- **keep_focused_window_visible** – When *True*, automatically scroll the pane so that the focused window is visible, or as much visible as possible if it doesn't completely fit the screen.
- **max_available_height** – Always constraint the height to this amount for performance reasons.
- **width** – When given, use this width instead of looking at the children.
- **height** – When given, use this height instead of looking at the children.
- **show_scrollbar** – When *True* display a scrollbar on the right.

get_children() → List[prompt_toolkit.layout.containers.Container]
Return the list of child *Container* objects.

get_key_bindings() → Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]
Returns a *KeyBindings* object. These bindings become active when any user control in this container has the focus, except if any containers between this container and the focused user control is modal.

is_modal() → bool
When this container is modal, key bindings from parent containers are not taken into account if a user control in this container is focused.

preferred_height(width: int, max_available_height: int) → *prompt_toolkit.layout.dimension.Dimension*

Return a *Dimension* that represents the desired height for this container.

preferred_width(max_available_width: int) → *prompt_toolkit.layout.dimension.Dimension*

Return a *Dimension* that represents the desired width for this container.

reset() → None

Reset the state of this container and all the children. (E.g. reset scroll offsets, etc...)

write_to_screen(screen: *prompt_toolkit.layout.screen.Screen*, mouse_handlers:

prompt_toolkit.layout.mouse_handlers.MouseHandlers, write_position:

prompt_toolkit.layout.screen.WritePosition, parent_style: str, erase_bg: bool, z_index:

Optional[int]) → None

Render scrollable pane content.

This works by rendering on an off-screen canvas, and copying over the visible region.

class *prompt_toolkit.layout.ScrollOffsets*(top: Union[int, Callable[[], int]] = 0, bottom: Union[int, Callable[[], int]] = 0, left: Union[int, Callable[[], int]] = 0, right: Union[int, Callable[[], int]] = 0)

Scroll offsets for the *Window* class.

Note that left/right offsets only make sense if line wrapping is disabled.

class *prompt_toolkit.layout.ColorColumn*(position: int, style: str = 'class:color-column')

Column for a *Window* to be colored.

class *prompt_toolkit.layout.to_container*(container: Union[*prompt_toolkit.layout.containers.Container*, *MagicContainer*])

Make sure that the given object is a *Container*.

class *prompt_toolkit.layout.to_window*(container: Union[*prompt_toolkit.layout.containers.Container*, *MagicContainer*])

Make sure that the given argument is a *Window*.

class *prompt_toolkit.layout.is_container*(value: object)

Checks whether the given value is a container object (for use in assert statements).

class *prompt_toolkit.layout.HorizontalAlign*(value)

Alignment for *VSplit*.

class *prompt_toolkit.layout.VerticalAlign*(value)

Alignment for *HSplit*.

Controls

```
class prompt_toolkit.layout.BufferControl(buffer: Optional[prompt_toolkit.buffer.Buffer] = None,
                                         input_processors:
                                         Optional[List[prompt_toolkit.layout.processors.Processor]] =
                                         None, include_default_input_processors: bool = True, lexer:
                                         Optional[prompt_toolkit.lexers.base.Lexer] = None,
                                         preview_search: Union[prompt_toolkit.filters.base.Filter,
                                         bool] = False, focusable:
                                         Union[prompt_toolkit.filters.base.Filter, bool] = True,
                                         search_buffer_control: Union[None, SearchBufferControl,
                                         Callable[[], SearchBufferControl]] = None, menu_position:
                                         Optional[Callable[[], Optional[int]]] = None,
                                         focus_on_click: Union[prompt_toolkit.filters.base.Filter,
                                         bool] = False, key_bindings: Optional[KeyBindingsBase] =
                                         None)
```

Control for visualising the content of a [Buffer](#).

Parameters

- **buffer** – The [Buffer](#) object to be displayed.
- **input_processors** – A list of [Processor](#) objects.
- **include_default_input_processors** – When True, include the default processors for highlighting of selection, search and displaying of multiple cursors.
- **lexer** – [Lexer](#) instance for syntax highlighting.
- **preview_search** – *bool* or [Filter](#): Show search while typing. When this is *True*, probably you want to add a `HighlightIncrementalSearchProcessor` as well. Otherwise only the cursor position will move, but the text won't be highlighted.
- **focusable** – *bool* or [Filter](#): Tell whether this control is focusable.
- **focus_on_click** – Focus this buffer when it's click, but not yet focused.
- **key_bindings** – a [KeyBindings](#) object.

create_content(width: int, height: int, preview_search: bool = False) →
[prompt_toolkit.layout.controls.UIContent](#)
Create a [UIContent](#).

get_invalidate_events() → Iterable[Event[object]]
Return the Window invalidate events.

get_key_bindings() → Optional[KeyBindingsBase]
When additional key bindings are given. Return these.

is_focusable() → bool
Tell whether this user control is focusable.

mouse_handler(mouse_event: [prompt_toolkit.mouse_events.MouseEvent](#)) → NotImplementedOrNone
Mouse handler for this control.

move_cursor_down() → None
Request to move the cursor down. This happens when scrolling down and the cursor is completely at the top.

move_cursor_up() → None
Request to move the cursor up.

preferred_width(*max_available_width: int*) → Optional[int]

This should return the preferred width.

Note: We don't specify a preferred width according to the content, because it would be too expensive. Calculating the preferred width can be done by calculating the longest line, but this would require applying all the processors to each line. This is unfeasible for a larger document, and doing it for small documents only would result in inconsistent behaviour.

property search_state: `prompt_toolkit.search.SearchState`

Return the *SearchState* for searching this *BufferControl*. This is always associated with the search control. If one search bar is used for searching multiple *BufferControls*, then they share the same *SearchState*.

```
class prompt_toolkit.layout.SearchBufferControl(buffer: Optional[prompt_toolkit.buffer.Buffer] =
None, input_processors: Optional[List[prompt_toolkit.layout.processors.Processor]]
= None, lexer:
Optional[prompt_toolkit.lexers.base.Lexer] = None,
focus_on_click:
Union[prompt_toolkit.filters.base.Filter, bool] =
False, key_bindings: Optional[KeyBindingsBase] =
None, ignore_case:
Union[prompt_toolkit.filters.base.Filter, bool] =
False)
```

BufferControl which is used for searching another *BufferControl*.

Parameters ignore_case – Search case insensitive.

class `prompt_toolkit.layout.DummyControl`

A dummy control object that doesn't paint any content.

Useful for filling a *Window*. (The *fragment* and *char* attributes of the *Window* class can be used to define the filling.)

create_content(*width: int, height: int*) → `prompt_toolkit.layout.controls.UIContent`

Generate the content for this user control.

Returns a *UIContent* instance.

is_focusable() → bool

Tell whether this user control is focusable.

```
class prompt_toolkit.layout.FormattedTextControl(text: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = "", style: str = "",
focusable: Union[prompt_toolkit.filters.base.Filter,
bool] = False, key_bindings:
Optional[KeyBindingsBase] = None, show_cursor:
bool = True, modal: bool = False,
get_cursor_position: Optional[Callable[[],
Optional[prompt_toolkit.data_structures.Point]]] =
None)
```

Control that displays formatted text. This can be either plain text, an *HTML* object an *ANSI* object, a list of (*style_str*, *text*) tuples or a callable that takes no argument and returns one of those, depending on how you prefer to do the formatting. See `prompt_toolkit.layout.formatted_text` for more information.

(It's mostly optimized for rather small widgets, like toolbars, menus, etc...)

When this UI control has the focus, the cursor will be shown in the upper left corner of this control by default. There are two ways for specifying the cursor position:

- Pass a `get_cursor_position` function which returns a *Point* instance with the current cursor position.
- If the (formatted) text is passed as a list of (style, text) tuples and there is one that looks like ('[SetCursorPosition]', ''), then this will specify the cursor position.

Mouse support:

The list of fragments can also contain tuples of three items, looking like: (style_str, text, handler). When mouse support is enabled and the user clicks on this fragment, then the given handler is called. That handler should accept two inputs: (Application, MouseEvent) and it should either handle the event or return *NotImplemented* in case we want the containing Window to handle this event.

Parameters

- **focusable** – *bool* or *Filter*: Tell whether this control is focusable.
- **text** – Text or formatted text to be displayed.
- **style** – Style string applied to the content. (If you want to style the whole *Window*, pass the style to the *Window* instead.)
- **key_bindings** – a *KeyBindings* object.
- **get_cursor_position** – A callable that returns the cursor position as a *Point* instance.

create_content(width: int, height: Optional[int]) → *prompt_toolkit.layout.controls.UIContent*
Generate the content for this user control.

Returns a *UIContent* instance.

get_key_bindings() → Optional[KeyBindingsBase]
The key bindings that are specific for this user control.

Return a *KeyBindings* object if some key bindings are specified, or *None* otherwise.

is_focusable() → bool
Tell whether this user control is focusable.

mouse_handler(mouse_event: *prompt_toolkit.mouse_events.MouseEvent*) → *NotImplementedOrNone*
Handle mouse events.

(When the fragment list contained mouse handlers and the user clicked on on any of these, the matching handler is called. This handler can still return *NotImplemented* in case we want the *Window* to handle this particular event.)

preferred_height(width: int, max_available_height: int, wrap_lines: bool, get_line_prefix: Optional[Callable[[int, int], Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str], Callable[[*prompt_toolkit.mouse_events.MouseEvent*], None]]], Callable[[], Any]]]]) → Optional[int]
Return the preferred height for this control.

preferred_width(max_available_width: int) → int
Return the preferred width for this control. That is the width of the longest line.

class `prompt_toolkit.layout.UIControl`
Base class for all user interface controls.

abstract create_content(width: int, height: int) → *prompt_toolkit.layout.controls.UIContent*
Generate the content for this user control.
Returns a *UIContent* instance.

get_invalidate_events() → Iterable[Event[object]]

Return a list of *Event* objects. This can be a generator. (The application collects all these events, in order to bind redraw handlers to these events.)

get_key_bindings() → Optional[KeyBindingsBase]

The key bindings that are specific for this user control.

Return a *KeyBindings* object if some key bindings are specified, or *None* otherwise.

is_focusable() → bool

Tell whether this user control is focusable.

mouse_handler(*mouse_event*: *prompt_toolkit.mouse_events.MouseEvent*) → NotImplementedOrNone

Handle mouse events.

When *NotImplemented* is returned, it means that the given event is not handled by the *UIControl* itself. The *Window* or key bindings can decide to handle this event as scrolling or changing focus.

Parameters *mouse_event* – *MouseEvent* instance.

move_cursor_down() → None

Request to move the cursor down. This happens when scrolling down and the cursor is completely at the top.

move_cursor_up() → None

Request to move the cursor up.

```
class prompt_toolkit.layout.UIContent(
    get_line: Callable[[int], List[Union[Tuple[str, str], Tuple[str, str,
        Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]] =
        <function UIContent.<lambda>>, line_count: int = 0,
    cursor_position: Optional[prompt_toolkit.data_structures.Point] =
        None, menu_position:
        Optional[prompt_toolkit.data_structures.Point] = None,
    show_cursor: bool = True)
```

Content generated by a user control. This content consists of a list of lines.

Parameters

- **get_line** – Callable that takes a line number and returns the current line. This is a list of (style_str, text) tuples.
- **line_count** – The number of lines.
- **cursor_position** – a *Point* for the cursor position.
- **menu_position** – a *Point* for the menu position.
- **show_cursor** – Make the cursor visible.

```
get_height_for_line(lineno: int, width: int, get_line_prefix: Optional[Callable[[int, int],
    Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]], Callable[[,
    Any]]]]], slice_stop: Optional[int] = None) → int
```

Return the height that a given line would need if it is rendered in a space with the given width (using line wrapping).

Parameters

- **get_line_prefix** – None or a *Window.get_line_prefix* callable that returns the prefix to be inserted before this line.
- **slice_stop** – Wrap only “line[:slice_stop]” and return that partial result. This is needed for scrolling the window correctly when line wrapping.

Returns The computed height.

Other

Sizing

class `prompt_toolkit.layout.Dimension`(*min: Optional[int] = None, max: Optional[int] = None, weight: Optional[int] = None, preferred: Optional[int] = None*)

Specified dimension (width/height) of a user control or window.

The layout engine tries to honor the preferred size. If that is not possible, because the terminal is larger or smaller, it tries to keep in between min and max.

Parameters

- **min** – Minimum size.
- **max** – Maximum size.
- **weight** – For a VSplit/HSplit, the actual size will be determined by taking the proportion of weights from all the children. E.g. When there are two children, one with a weight of 1, and the other with a weight of 2, the second will always be twice as big as the first, if the min/max values allow it.
- **preferred** – Preferred size.

classmethod `exact(amount: int) → prompt_toolkit.layout.dimension.Dimension`
Return a `Dimension` with an exact size. (min, max and preferred set to amount).

is_zero() → bool
True if this `Dimension` represents a zero size.

classmethod `zero() → prompt_toolkit.layout.dimension.Dimension`
Create a dimension that represents a zero size. (Used for ‘invisible’ controls.)

Margins

class `prompt_toolkit.layout.Margin`

Base interface for a margin.

abstract `create_margin(window_render_info: WindowRenderInfo, width: int, height: int) → List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]`

Creates a margin. This should return a list of (style_str, text) tuples.

Parameters

- **window_render_info** – `WindowRenderInfo` instance, generated after rendering and copying the visible part of the `UIControl` into the `Window`.
- **width** – The width that’s available for this margin. (As reported by `get_width()`.)
- **height** – The height that’s available for this margin. (The height of the `Window`.)

abstract `get_width(get_ui_content: Callable[[], prompt_toolkit.layout.controls.UIContent]) → int`
Return the width that this margin is going to consume.

Parameters `get_ui_content` – Callable that asks the user control to create a `UIContent` instance. This can be used for instance to obtain the number of lines.

```
class prompt_toolkit.layout.NumberedMargin(relative: Union[prompt_toolkit.filters.base.Filter, bool] =
                                         False, display_tildes:
                                         Union[prompt_toolkit.filters.base.Filter, bool] = False)
```

Margin that displays the line numbers.

Parameters

- **relative** – Number relative to the cursor position. Similar to the Vi ‘relativenumber’ option.
- **display_tildes** – Display tildes after the end of the document, just like Vi does.

```
create_margin(window_render_info: WindowRenderInfo, width: int, height: int) → List[Union[Tuple[str,
str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]
```

Creates a margin. This should return a list of (style_str, text) tuples.

Parameters

- **window_render_info** – WindowRenderInfo instance, generated after rendering and copying the visible part of the `UIControl` into the `Window`.
- **width** – The width that’s available for this margin. (As reported by `get_width()`.)
- **height** – The height that’s available for this margin. (The height of the `Window`.)

```
get_width(get_ui_content: Callable[[], prompt_toolkit.layout.controls.UIContent]) → int
```

Return the width that this margin is going to consume.

Parameters `get_ui_content` – Callable that asks the user control to create a `UIContent` instance. This can be used for instance to obtain the number of lines.

```
class prompt_toolkit.layout.ScrollbarMargin(display_arrows: Union[prompt_toolkit.filters.base.Filter,
bool] = False, up_arrow_symbol: str = '^',
down_arrow_symbol: str = 'v')
```

Margin displaying a scrollbar.

Parameters `display_arrows` – Display scroll up/down arrows.

```
create_margin(window_render_info: WindowRenderInfo, width: int, height: int) → List[Union[Tuple[str,
str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]
```

Creates a margin. This should return a list of (style_str, text) tuples.

Parameters

- **window_render_info** – WindowRenderInfo instance, generated after rendering and copying the visible part of the `UIControl` into the `Window`.
- **width** – The width that’s available for this margin. (As reported by `get_width()`.)
- **height** – The height that’s available for this margin. (The height of the `Window`.)

```
get_width(get_ui_content: Callable[[], prompt_toolkit.layout.controls.UIContent]) → int
```

Return the width that this margin is going to consume.

Parameters `get_ui_content` – Callable that asks the user control to create a `UIContent` instance. This can be used for instance to obtain the number of lines.

```
class prompt_toolkit.layout.ConditionalMargin(margin: prompt_toolkit.layout.margins.Margin, filter:
Union[prompt_toolkit.filters.base.Filter, bool])
```

Wrapper around other `Margin` classes to show/hide them.

```
create_margin(window_render_info: WindowRenderInfo, width: int, height: int) → List[Union[Tuple[str,
str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]
```

Creates a margin. This should return a list of (style_str, text) tuples.

Parameters

- **window_render_info** – WindowRenderInfo instance, generated after rendering and copying the visible part of the *UIControl* into the *Window*.
- **width** – The width that's available for this margin. (As reported by *get_width()*.)
- **height** – The height that's available for this margin. (The height of the *Window*.)

get_width(*get_ui_content*: Callable[[], prompt_toolkit.layout.controls.UIContent]) → int

Return the width that this margin is going to consume.

Parameters **get_ui_content** – Callable that asks the user control to create a *UIContent* instance. This can be used for instance to obtain the number of lines.

```
class prompt_toolkit.layout.PromptMargin(get_prompt: Callable[[], List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]], get_continuation: Optional[Callable[[int, int, bool], List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]] = None)
```

[Deprecated]

Create margin that displays a prompt. This can display one prompt at the first line, and a continuation prompt (e.g. just dots) on all the following lines.

This *PromptMargin* implementation has been largely superseded in favor of the *get_line_prefix* attribute of *Window*. The reason is that a margin is always a fixed width, while *get_line_prefix* can return a variable width prefix in front of every line, making it more powerful, especially for line continuations.

Parameters

- **get_prompt** – Callable returns formatted text or a list of (*style_str*, *type*) tuples to be shown as the prompt at the first line.
- **get_continuation** – Callable that takes three inputs. The width (int), line_number (int), and is_soft_wrap (bool). It should return formatted text or a list of (*style_str*, *type*) tuples for the next lines of the input.

create_margin(*window_render_info*: WindowRenderInfo, *width*: int, *height*: int) → List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]]]

Creates a margin. This should return a list of (*style_str*, *text*) tuples.

Parameters

- **window_render_info** – WindowRenderInfo instance, generated after rendering and copying the visible part of the *UIControl* into the *Window*.
- **width** – The width that's available for this margin. (As reported by *get_width()*.)
- **height** – The height that's available for this margin. (The height of the *Window*.)

get_width(*get_ui_content*: Callable[[], prompt_toolkit.layout.controls.UIContent]) → int

Width to report to the *Window*.

Completion Menus

```
class prompt_toolkit.layout.CompletionsMenu(max_height: Optional[int] = None, scroll_offset:
    Union[int, Callable[[], int]] = 0, extra_filter:
    Union[prompt_toolkit.filters.base.Filter, bool] = True,
    display_arrows: Union[prompt_toolkit.filters.base.Filter,
        bool] = False, z_index: int = 100000000)
```

```
class prompt_toolkit.layout.MultiColumnCompletionsMenu(min_rows: int = 3,
    suggested_max_column_width: int = 30,
    show_meta:
    Union[prompt_toolkit.filters.base.Filter,
        bool] = True, extra_filter:
    Union[prompt_toolkit.filters.base.Filter,
        bool] = True, z_index: int = 100000000)
```

Container that displays the completions in several columns. When *show_meta* (a *Filter*) evaluates to True, it shows the meta information at the bottom.

Processors

Processors are little transformation blocks that transform the fragments list from a buffer before the BufferControl will render it to the screen.

They can insert fragments before or after, or highlight fragments by replacing the fragment types.

```
class prompt_toolkit.layout.processors.AfterInput(text: Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
        Callable[[prompt_toolkit.mouse_events.MouseEvent],
            None]]], Callable[[], Any]]], style: str = "")
```

Insert text after the input.

Parameters

- **text** – This can be either plain text or formatted text (or a callable that returns any of those).
- **style** – style to be applied to this prompt/prefix.

```
apply_transformation(ti: prompt_toolkit.layout.processors.TransformationInput) →
    prompt_toolkit.layout.processors.Transformation
```

Apply transformation. Returns a *Transformation* instance.

Parameters **transformation_input** – *TransformationInput* object.

```
class prompt_toolkit.layout.processors.AppendAutoSuggestion(style: str = 'class:auto-suggestion')
Append the auto suggestion to the input. (The user can then press the right arrow the insert the suggestion.)
```

```
apply_transformation(ti: prompt_toolkit.layout.processors.TransformationInput) →
    prompt_toolkit.layout.processors.Transformation
```

Apply transformation. Returns a *Transformation* instance.

Parameters **transformation_input** – *TransformationInput* object.

```
class prompt_toolkit.layout.processors.BeforeInput(text: Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
        Callable[[prompt_toolkit.mouse_events.MouseEvent],
            None]]], Callable[[], Any]]], style: str = "")
```

Insert text before the input.

Parameters

- **text** – This can be either plain text or formatted text (or a callable that returns any of those).
- **style** – style to be applied to this prompt/prefix.

apply_transformation(*ti*: `prompt_toolkit.layout.processors.TransformationInput`) →
`prompt_toolkit.layout.processors.Transformation`
Apply transformation. Returns a *Transformation* instance.

Parameters **transformation_input** – *TransformationInput* object.

```
class prompt_toolkit.layout.processors.ConditionalProcessor(processor:  
                                                         prompt_toolkit.layout.processors.Processor,  
                                                         filter:  
                                                         Union[prompt_toolkit.filters.base.Filter,  
                                                         bool])
```

Processor that applies another processor, according to a certain condition. Example:

```
# Create a function that returns whether or not the processor should  
# currently be applied.  
def highlight_enabled():  
    return true_or_false  
  
# Wrapped it in a `ConditionalProcessor` for usage in a `BufferControl`.  
BufferControl(input_processors=[  
    ConditionalProcessor(HighlightSearchProcessor(),  
                        Condition(highlight_enabled))])
```

Parameters

- **processor** – *Processor* instance.
- **filter** – *Filter* instance.

apply_transformation(*transformation_input*: `prompt_toolkit.layout.processors.TransformationInput`) →
`prompt_toolkit.layout.processors.Transformation`
Apply transformation. Returns a *Transformation* instance.

Parameters **transformation_input** – *TransformationInput* object.

```
class prompt_toolkit.layout.processors.DisplayMultipleCursors  
    When we're in Vi block insert mode, display all the cursors.
```

apply_transformation(*transformation_input*: `prompt_toolkit.layout.processors.TransformationInput`) →
`prompt_toolkit.layout.processors.Transformation`
Apply transformation. Returns a *Transformation* instance.

Parameters **transformation_input** – *TransformationInput* object.

```
class prompt_toolkit.layout.processors.DummyProcessor  
    A Processor that doesn't do anything.
```

apply_transformation(*transformation_input*: `prompt_toolkit.layout.processors.TransformationInput`) →
`prompt_toolkit.layout.processors.Transformation`
Apply transformation. Returns a *Transformation* instance.

Parameters **transformation_input** – *TransformationInput* object.

```
class prompt_toolkit.layout.processors.DynamicProcessor(get_processor: Callable[[], Op-  
                                                         tional[prompt_toolkit.layout.processors.Processor]])  
    Processor class that dynamically returns any Processor.
```

Parameters `get_processor` – Callable that returns a *Processor* instance.

apply_transformation(*ti*: `prompt_toolkit.layout.processors.TransformationInput`) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters `transformation_input` – *TransformationInput* object.

class `prompt_toolkit.layout.processors.HighlightIncrementalSearchProcessor`

Highlight the search terms that are used for highlighting the incremental search. The style class 'incsearch' will be applied to the content.

Important: this requires the *preview_search=True* flag to be set for the *BufferControl*. Otherwise, the cursor position won't be set to the search match while searching, and nothing happens.

class `prompt_toolkit.layout.processors.HighlightMatchingBracketProcessor`(*chars*: *str* =
'[](){}<>',
max_cursor_distance:
int = 1000)

When the cursor is on or right after a bracket, it highlights the matching bracket.

Parameters `max_cursor_distance` – Only highlight matching brackets when the cursor is within this distance. (From inside a *Processor*, we can't know which lines will be visible on the screen. But we also don't want to scan the whole document for matching brackets on each key press, so we limit to this value.)

apply_transformation(*transformation_input*: `prompt_toolkit.layout.processors.TransformationInput`) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters `transformation_input` – *TransformationInput* object.

class `prompt_toolkit.layout.processors.HighlightSearchProcessor`

Processor that highlights search matches in the document. Note that this doesn't support multiline search matches yet.

The style classes 'search' and 'search.current' will be applied to the content.

apply_transformation(*transformation_input*: `prompt_toolkit.layout.processors.TransformationInput`) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters `transformation_input` – *TransformationInput* object.

class `prompt_toolkit.layout.processors.HighlightSelectionProcessor`

Processor that highlights the selection in the document.

apply_transformation(*transformation_input*: `prompt_toolkit.layout.processors.TransformationInput`) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters `transformation_input` – *TransformationInput* object.

class `prompt_toolkit.layout.processors.PasswordProcessor`(*char*: *str* = '*')

Processor that masks the input. (For passwords.)

Parameters `char` – (string) Character to be used. "*" by default.

apply_transformation(*ti*: `prompt_toolkit.layout.processors.TransformationInput`) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters `transformation_input` – *TransformationInput* object.

class `prompt_toolkit.layout.processors.Processor`

Manipulate the fragments for a given line in a *BufferControl*.

abstract `apply_transformation`(*transformation_input*:
prompt_toolkit.layout.processors.TransformationInput) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters *transformation_input* – *TransformationInput* object.

class `prompt_toolkit.layout.processors.ReverseSearchProcessor`

Process to display the “(reverse-i-search)`...`:...” stuff around the search buffer.

Note: This processor is meant to be applied to the *BufferControl* that contains the search buffer, it’s not meant for the original input.

apply_transformation(*ti*: *prompt_toolkit.layout.processors.TransformationInput*) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters *transformation_input* – *TransformationInput* object.

class `prompt_toolkit.layout.processors.ShowArg`

Display the ‘arg’ in front of the input.

This was used by the *PromptSession*, but now it uses the *Window.get_line_prefix* function instead.

class `prompt_toolkit.layout.processors.ShowLeadingWhiteSpaceProcessor`(*get_char*:
Optional[Callable[[], str]] = None, *style*: *str* =
'class:leading-whitespace')

Make leading whitespace visible.

Parameters *get_char* – Callable that returns one character.

apply_transformation(*ti*: *prompt_toolkit.layout.processors.TransformationInput*) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters *transformation_input* – *TransformationInput* object.

class `prompt_toolkit.layout.processors.ShowTrailingWhiteSpaceProcessor`(*get_char*:
Optional[Callable[[], str]] = None, *style*: *str* =
'class:trailing-whitespace')

Make trailing whitespace visible.

Parameters *get_char* – Callable that returns one character.

apply_transformation(*ti*: *prompt_toolkit.layout.processors.TransformationInput*) →
prompt_toolkit.layout.processors.Transformation

Apply transformation. Returns a *Transformation* instance.

Parameters *transformation_input* – *TransformationInput* object.

class `prompt_toolkit.layout.processors.TabsProcessor`(*tabstop*: *Union[int, Callable[[], int]]* = 4,
char1: *Union[str, Callable[[], str]]* = '^',
char2: *Union[str, Callable[[], str]]* = " ", *style*:
str = 'class:tab')

Render tabs as spaces (instead of ^I) or make them visible (for instance, by replacing them with dots.)

Parameters

- **tabstop** – Horizontal space taken by a tab. (*int* or callable that returns an *int*).
- **char1** – Character or callable that returns a character (text of length one). This one is used for the first space taken by the tab.
- **char2** – Like *char1*, but for the rest of the space.

apply_transformation(*ti*: [prompt_toolkit.layout.processors.TransformationInput](#)) →
[prompt_toolkit.layout.processors.Transformation](#)

Apply transformation. Returns a [Transformation](#) instance.

Parameters **transformation_input** – [TransformationInput](#) object.

```
class prompt_toolkit.layout.processors.Transformation(fragments: List[Union[Tuple[str, str],
                                                                    Tuple[str, str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    None]]], source_to_display:
                                                                    Optional[Callable[[int], int]] = None,
                                                                    display_to_source: Optional[Callable[[int],
                                                                    int]] = None)
```

Transformation result, as returned by [Processor.apply_transformation\(\)](#).

Important: Always make sure that the length of *document.text* is equal to the length of all the text in *fragments*!

Parameters

- **fragments** – The transformed fragments. To be displayed, or to pass to the next processor.
- **source_to_display** – Cursor position transformation from original string to transformed string.
- **display_to_source** – Cursor position transformed from source string to original string.

```
class prompt_toolkit.layout.processors.TransformationInput(buffer_control: BufferControl,
                                                           document:
                                                           prompt_toolkit.document.Document,
                                                           lineno: int, source_to_display:
                                                           Callable[[int], int], fragments:
                                                           List[Union[Tuple[str, str], Tuple[str, str,
                                                           Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                           None]]], width: int, height: int)
```

Parameters

- **buffer_control** – [BufferControl](#) instance.
- **lineno** – The number of the line to which we apply the processor.
- **source_to_display** – A function that returns the position in the *fragments* for any position in the source string. (This takes previous processors into account.)
- **fragments** – List of fragments that we can transform. (Received from the previous processor.)

```
prompt_toolkit.layout.processors.merge_processors(processors:
                                                    List[prompt_toolkit.layout.processors.Processor])
                                                    → prompt_toolkit.layout.processors.Processor
```

Merge multiple *Processor* objects into one.

Utils

`prompt_toolkit.layout.utils.explode_text_fragments`(*fragments*:

Iterable[prompt_toolkit.layout.utils._T]) →

`prompt_toolkit.layout.utils._ExplodedList[prompt_toolkit.layout.util`

Turn a list of (style_str, text) tuples into another list where each string is exactly one character.

It should be fine to call this function several times. Calling this on a list that is already exploded, is a null operation.

Parameters **fragments** – List of (style, text) tuples.

Screen

class `prompt_toolkit.layout.screen.Char`(*char*: str = ' ', *style*: str = '')

Represent a single character in a [Screen](#).

This should be considered immutable.

Parameters

- **char** – A single character (can be a double-width character).
- **style** – A style string. (Can contain classnames.)

class `prompt_toolkit.layout.screen.Screen`(*default_char*: Optional[`prompt_toolkit.layout.screen.Char`] = None, *initial_width*: int = 0, *initial_height*: int = 0)

Two dimensional buffer of [Char](#) instances.

append_style_to_content(*style_str*: str) → None

For all the characters in the screen. Set the style string to the given *style_str*.

cursor_positions: Dict[Window, `prompt_toolkit.data_structures.Point`]

Position of the cursor.

draw_all_floats() → None

Draw all float functions in order of z-index.

draw_with_z_index(*z_index*: int, *draw_func*: Callable[[], None]) → None

Add a draw-function for a *Window* which has a >= 0 *z_index*. This will be postponed until *draw_all_floats* is called.

fill_area(*write_position*: `prompt_toolkit.layout.screen.WritePosition`, *style*: str = "", *after*: bool = False) → None

Fill the content of this area, using the given *style*. The style is prepended before whatever was here before.

get_cursor_position(*window*: Window) → `prompt_toolkit.data_structures.Point`

Get the cursor position for a given window. Returns a *Point*.

get_menu_position(*window*: Window) → `prompt_toolkit.data_structures.Point`

Get the menu position for a given window. (This falls back to the cursor position if no menu position was set.)

menu_positions: Dict[Window, `prompt_toolkit.data_structures.Point`]

(Optional) Where to position the menu. E.g. at the start of a completion. (We can't use the cursor position, because we don't want the completion menu to change its position when we browse through all the completions.)

set_cursor_position(*window*: Window, *position*: `prompt_toolkit.data_structures.Point`) → None

Set the cursor position for a given window.

set_menu_position(*window*: *Window*, *position*: *prompt_toolkit.data_structures.Point*) → *None*

Set the cursor position for a given window.

show_cursor

Visibility of the cursor.

width

Currently used width/height of the screen. This will increase when data is written to the screen.

zero_width_escapes: *DefaultDict[int, DefaultDict[int, str]]*

Escape sequences to be injected.

3.11.18 Widgets

Collection of reusable components for building full screen applications. These are higher level abstractions on top of the *prompt_toolkit.layout* module.

Most of these widgets implement the `__pt_container__` method, which makes it possible to embed these in the layout like any other container.

```
class prompt_toolkit.widgets.Box(body: Union[prompt_toolkit.layout.containers.Container,
                                             MagicContainer], padding: Union[None, int,
                                             prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = None,
                                padding_left: Union[None, int,
                                             prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = None,
                                padding_right: Union[None, int,
                                             prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = None,
                                padding_top: Union[None, int,
                                             prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = None,
                                padding_bottom: Union[None, int,
                                             prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = None,
                                width: Union[None, int, prompt_toolkit.layout.dimension.Dimension,
                                             Callable[[], Any]] = None, height: Union[None, int,
                                             prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = None,
                                style: str = "", char: Union[None, str, Callable[[], str]] = None, modal:
                                bool = False, key_bindings:
                                Optional[prompt_toolkit.key_binding.key_bindings.KeyBindings] =
                                None)
```

Add padding around a container.

This also makes sure that the parent can provide more space than required by the child. This is very useful when wrapping a small element with a fixed size into a *VSplit* or *HSplit* object. The *HSplit* and *VSplit* try to make sure to adapt respectively the width and height, possibly shrinking other elements. Wrapping something in a *Box* makes it flexible.

Parameters

- **body** – Another container object.
- **padding** – The margin to be used around the body. This can be overridden by *padding_left*, *padding_right*, *padding_top* and *padding_bottom*.
- **style** – A style string.
- **char** – Character to be used for filling the space around the body. (This is supposed to be a character with a terminal width of 1.)

```
class prompt_toolkit.widgets.Button(text: str, handler: Optional[Callable[[], None]] = None, width: int =
    12, left_symbol: str = '<', right_symbol: str = '>')
```

Clickable button.

Parameters

- **text** – The caption for the button.
- **handler** – *None* or callable. Called when the button is clicked. No parameters are passed to this callable. Use for instance Python's *functools.partial* to pass parameters to this callable if needed.
- **width** – Width of the button.

```
class prompt_toolkit.widgets.Checkbox(text: Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
    Callable[[], Any]]] = "", checked: bool = False)
```

Backward compatibility util: creates a 1-sized CheckboxList

Parameters **text** – the text

```
class prompt_toolkit.widgets.FormattedTextToolbar(text: Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent],
    None]]], Callable[[], Any]]], style: str = "", **kw:
    Any)
```

```
class prompt_toolkit.widgets.Frame(body: Union[prompt_toolkit.layout.containers.Container,
    MagicContainer], title: Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
    Callable[[], Any]]] = "", style: str = "", width: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] =
    None, height: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] =
    None, key_bindings:
    Optional[prompt_toolkit.key_binding.key_bindings.KeyBindings] =
    None, modal: bool = False)
```

Draw a border around any container, optionally with a title text.

Changing the title and body of the frame is possible at runtime by assigning to the *body* and *title* attributes of this class.

Parameters

- **body** – Another container object.
- **title** – Text to be displayed in the top of the frame (can be formatted text).
- **style** – Style string to be applied to this widget.

```
class prompt_toolkit.widgets.HorizontalLine
```

A simple horizontal line with a height of 1.

```
class prompt_toolkit.widgets.Label(text: Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]], style: str = "", width: Union[None, int, prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] = None, dont_extend_height: bool = True, dont_extend_width: bool = False, align: Union[prompt_toolkit.layout.containers.WindowAlign, Callable[[], prompt_toolkit.layout.containers.WindowAlign]] = WindowAlign.LEFT)
```

Widget that displays the given text. It is not editable or focusable.

Parameters

- **text** – Text to display. Can be multiline. All value types accepted by `prompt_toolkit.layout.FormattedTextControl` are allowed, including a callable.
- **style** – A style string.
- **width** – When given, use this width, rather than calculating it from the text size.
- **dont_extend_width** – When *True*, don't take up more width than preferred, i.e. the length of the longest line of the text, or value of *width* parameter, if given. *True* by default
- **dont_extend_height** – When *True*, don't take up more width than the preferred height, i.e. the number of lines of the text. *False* by default.

```
class prompt_toolkit.widgets.MenuContainer(body: Union[prompt_toolkit.layout.containers.Container, MagicContainer], menu_items: List[MenuItem], floats: Optional[List[prompt_toolkit.layout.containers.Float]] = None, key_bindings: Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase] = None)
```

Parameters

- **floats** – List of extra Float objects to display.
- **menu_items** – List of *MenuItem* objects.

```
class prompt_toolkit.widgets.RadioList(values: Sequence[Tuple[prompt_toolkit.widgets.base._T, Optional[Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]], Callable[[], Any]]]]], default: Optional[prompt_toolkit.widgets.base._T] = None)
```

List of radio buttons. Only one can be checked at the same time.

Parameters values – List of (value, label) tuples.

```
class prompt_toolkit.widgets.SearchToolBar(search_buffer: Optional[prompt_toolkit.buffer.Buffer] =
None, vi_mode: bool = False, text_if_not_searching:
Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = ", forward_search_prompt:
Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = 'I-search: ',
backward_search_prompt: Optional[Union[str,
MagicFormattedText, List[Union[Tuple[str, str], Tuple[str,
str, Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = 'I-search backward: ',
ignore_case: Union[prompt_toolkit.filters.base.Filter, bool]
= False)
```

Parameters

- **vi_mode** – Display ‘/’ and ‘?’ instead of I-search.
- **ignore_case** – Search case insensitive.

```
class prompt_toolkit.widgets.Shadow(body: Union[prompt_toolkit.layout.containers.Container,
MagicContainer])
```

Draw a shadow underneath/behind this container. (This applies `class:shadow` to the cells under the shadow. The Style should define the colors for the shadow.)

Parameters **body** – Another container object.

```
class prompt_toolkit.widgets.SystemToolBar(prompt: Optional[Union[str, MagicFormattedText,
List[Union[Tuple[str, str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
None]]], Callable[[], Any]]] = 'Shell command: ',
enable_global_bindings:
Union[prompt_toolkit.filters.base.Filter, bool] = True)
```

Toolbar for a system prompt.

Parameters **prompt** – Prompt to be displayed to the user.

```

class prompt_toolkit.widgets.TextArea(text: str = "", multiline: Union[prompt_toolkit.filters.base.Filter,
    bool] = True, password: Union[prompt_toolkit.filters.base.Filter,
    bool] = False, lexer: Optional[prompt_toolkit.lexers.base.Lexer] =
    None, auto_suggest:
    Optional[prompt_toolkit.auto_suggest.AutoSuggest] = None,
    completer: Optional[prompt_toolkit.completion.base.Completer]
    = None, complete_while_typing:
    Union[prompt_toolkit.filters.base.Filter, bool] = True, validator:
    Optional[prompt_toolkit.validation.Validator] = None,
    accept_handler: Optional[Callable[[Buffer], bool]] = None,
    history: Optional[prompt_toolkit.history.History] = None,
    focusable: Union[prompt_toolkit.filters.base.Filter, bool] = True,
    focus_on_click: Union[prompt_toolkit.filters.base.Filter, bool] =
    False, wrap_lines: Union[prompt_toolkit.filters.base.Filter, bool]
    = True, read_only: Union[prompt_toolkit.filters.base.Filter, bool]
    = False, width: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] =
    None, height: Union[None, int,
    prompt_toolkit.layout.dimension.Dimension, Callable[[], Any]] =
    None, dont_extend_height:
    Union[prompt_toolkit.filters.base.Filter, bool] = False,
    dont_extend_width: Union[prompt_toolkit.filters.base.Filter, bool]
    = False, line_numbers: bool = False, get_line_prefix:
    Optional[Callable[[int, int], Optional[Union[str,
    MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
    Callable[[], Any]]]]] = None, scrollbar: bool = False, style: str =
    "", search_field:
    Optional[prompt_toolkit.widgets.toolbars.SearchToolbar] = None,
    preview_search: Union[prompt_toolkit.filters.base.Filter, bool] =
    True, prompt: Optional[Union[str, MagicFormattedText,
    List[Union[Tuple[str, str], Tuple[str, str,
    Callable[[prompt_toolkit.mouse_events.MouseEvent], None]]],
    Callable[[], Any]]] = "", input_processors:
    Optional[List[prompt_toolkit.layout.processors.Processor]] =
    None)

```

A simple input field.

This is a higher level abstraction on top of several other classes with sane defaults.

This widget does have the most common options, but it does not intend to cover every single use case. For more configurations options, you can always build a text area manually, using a [Buffer](#), [BufferControl](#) and [Window](#).

Buffer attributes:

Parameters

- **text** – The initial text.
- **multiline** – If True, allow multiline input.
- **completer** – [Completer](#) instance for auto completion.
- **complete_while_typing** – Boolean.
- **accept_handler** – Called when *Enter* is pressed (This should be a callable that takes a buffer as input).

- **history** – *History* instance.
- **auto_suggest** – *AutoSuggest* instance for input suggestions.

BufferControl attributes:

Parameters

- **password** – When *True*, display using asterisks.
- **focusable** – When *True*, allow this widget to receive the focus.
- **focus_on_click** – When *True*, focus after mouse click.
- **input_processors** – *None* or a list of *Processor* objects.
- **validator** – *None* or a *Validator* object.

Window attributes:

Parameters

- **lexer** – *Lexer* instance for syntax highlighting.
- **wrap_lines** – When *True*, don't scroll horizontally, but wrap lines.
- **width** – Window width. (*Dimension* object.)
- **height** – Window height. (*Dimension* object.)
- **scrollbar** – When *True*, display a scroll bar.
- **style** – A style string.
- **dont_extend_width** – When *True*, don't take up more width than the preferred width reported by the control.
- **dont_extend_height** – When *True*, don't take up more width than the preferred height reported by the control.
- **get_line_prefix** – *None* or a callable that returns formatted text to be inserted before a line. It takes a line number (int) and a wrap_count and returns formatted text. This can be used for implementation of line continuations, things like Vim “breakindent” and so on.

Other attributes:

Parameters **search_field** – An optional *SearchToolbar* object.

property **accept_handler**: `Optional[Callable[[prompt_toolkit.buffer.Buffer], bool]]`

The accept handler. Called when the user accepts the input.

property **document**: `prompt_toolkit.document.Document`

The *Buffer* document (text + cursor position).

property **text**: `str`

The *Buffer* text.

class `prompt_toolkit.widgets.VerticalLine`

A simple vertical line with a width of 1.

3.11.19 Filters

Filters decide whether something is active or not (they decide about a boolean state). This is used to enable/disable features, like key bindings, parts of the layout and other stuff. For instance, we could have a *HasSearch* filter attached to some part of the layout, in order to show that part of the user interface only while the user is searching.

Filters are made to avoid having to attach callbacks to all event in order to propagate state. However, they are lazy, they don't automatically propagate the state of what they are observing. Only when a filter is called (it's actually a callable), it will calculate its value. So, it's not really reactive programming, but it's made to fit for this framework.

Filters can be chained using `&` and `|` operations, and inverted using the `~` operator, for instance:

```
filter = has_focus('default') & ~ has_selection
```

class `prompt_toolkit.filters.Always`

Always enable feature.

class `prompt_toolkit.filters.Condition(func: Callable[[], bool])`

Turn any callable into a Filter. The callable is supposed to not take any arguments.

This can be used as a decorator:

```
@Condition
def feature_is_active(): # `feature_is_active` becomes a Filter.
    return True
```

Parameters `func` – Callable which takes no inputs and returns a boolean.

class `prompt_toolkit.filters.Filter`

Base class for any filter to activate/deactivate a feature, depending on a condition.

The return value of `__call__` will tell if the feature should be active.

`prompt_toolkit.filters.HasFocus(value: FocusableElement) → prompt_toolkit.filters.base.Condition`

Enable when this buffer has the focus.

`prompt_toolkit.filters.InEditMode(editing_mode: prompt_toolkit.enums.EditingMode) → prompt_toolkit.filters.base.Condition`

Check whether a given editing mode is active. (Vi or Emacs.)

class `prompt_toolkit.filters.Never`

Never enable feature.

`prompt_toolkit.filters.has_focus(value: FocusableElement) → prompt_toolkit.filters.base.Condition`

Enable when this buffer has the focus.

`prompt_toolkit.filters.in_editing_mode(editing_mode: prompt_toolkit.enums.EditingMode) → prompt_toolkit.filters.base.Condition`

Check whether a given editing mode is active. (Vi or Emacs.)

`prompt_toolkit.filters.is_true(value: Union[prompt_toolkit.filters.base.Filter, bool]) → bool`

Test whether *value* is True. In case of a Filter, call it.

Parameters `value` – Boolean or *Filter* instance.

`prompt_toolkit.filters.to_filter(bool_or_filter: Union[prompt_toolkit.filters.base.Filter, bool]) → prompt_toolkit.filters.base.Filter`

Accept both booleans and Filters as input and turn it into a Filter.

class `prompt_toolkit.filters.Filter`

Base class for any filter to activate/deactivate a feature, depending on a condition.

The return value of `__call__` will tell if the feature should be active.

class `prompt_toolkit.filters.Condition(func: Callable[[], bool])`

Turn any callable into a Filter. The callable is supposed to not take any arguments.

This can be used as a decorator:

```
@Condition
def feature_is_active(): # `feature_is_active` becomes a Filter.
    return True
```

Parameters `func` – Callable which takes no inputs and returns a boolean.

`prompt_toolkit.filters.utils.is_true(value: Union[prompt_toolkit.filters.base.Filter, bool]) → bool`

Test whether *value* is True. In case of a Filter, call it.

Parameters `value` – Boolean or *Filter* instance.

`prompt_toolkit.filters.utils.to_filter(bool_or_filter: Union[prompt_toolkit.filters.base.Filter, bool]) → prompt_toolkit.filters.base.Filter`

Accept both booleans and Filters as input and turn it into a Filter.

Filters that accept a *Application* as argument.

`prompt_toolkit.filters.app.has_focus(value: FocusableElement) → prompt_toolkit.filters.base.Condition`

Enable when this buffer has the focus.

`prompt_toolkit.filters.app.in_editing_mode(editing_mode: prompt_toolkit.enums.EditingMode) → prompt_toolkit.filters.base.Condition`

Check whether a given editing mode is active. (Vi or Emacs.)

3.11.20 Key binding

```
class prompt_toolkit.key_binding.ConditionalKeyBindings(key_bindings:
                                                         prompt_toolkit.key_binding.key_bindings.KeyBindingsBase,
                                                         filter:
                                                         Union[prompt_toolkit.filters.base.Filter,
                                                         bool] = True)
```

Wraps around a *KeyBindings*. Disable/enable all the key bindings according to the given (additional) filter.:

```
@Condition
def setting_is_true():
    return True # or False

registry = ConditionalKeyBindings(key_bindings, setting_is_true)
```

When new key bindings are added to this object. They are also enable/disable according to the given *filter*.

Parameters

- **registries** – List of *KeyBindings* objects.
- **filter** – *Filter* object.

class `prompt_toolkit.key_binding.DynamicKeyBindings`(*get_key_bindings: Callable[[, Optional[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]*)

KeyBindings class that can dynamically returns any KeyBindings.

Parameters `get_key_bindings` – Callable that returns a *KeyBindings* instance.

class `prompt_toolkit.key_binding.KeyBindings`

A container for a set of key bindings.

Example usage:

```
kb = KeyBindings()

@kb.add('c-t')
def _(event):
    print('Control-T pressed')

@kb.add('c-a', 'c-b')
def _(event):
    print('Control-A pressed, followed by Control-B')

@kb.add('c-x', filter=is_searching)
def _(event):
    print('Control-X pressed') # Works only if we are searching.
```

add(*keys: Union[prompt_toolkit.keys.Keys, str], filter: Union[prompt_toolkit.filters.base.Filter, bool] = True, eager: Union[prompt_toolkit.filters.base.Filter, bool] = False, is_global: Union[prompt_toolkit.filters.base.Filter, bool] = False, save_before: Callable[[KeyPressEvent], bool] = <function KeyBindings.<lambda>>, record_in_macro: Union[prompt_toolkit.filters.base.Filter, bool] = True) → Callable[[prompt_toolkit.key_binding.key_bindings.T], prompt_toolkit.key_binding.key_bindings.T]

Decorator for adding a key bindings.

Parameters

- **filter** – *Filter* to determine when this key binding is active.
- **eager** – *Filter* or *bool*. When True, ignore potential longer matches when this key binding is hit. E.g. when there is an active eager key binding for Ctrl-X, execute the handler immediately and ignore the key binding for Ctrl-X Ctrl-E of which it is a prefix.
- **is_global** – When this key bindings is added to a *Container* or *Control*, make it a global (always active) binding.
- **save_before** – Callable that takes an *Event* and returns True if we should save the current buffer, before handling the event. (That's the default.)
- **record_in_macro** – Record these key bindings when a macro is being recorded. (True by default.)

add_binding(*keys: Union[prompt_toolkit.keys.Keys, str], filter: Union[prompt_toolkit.filters.base.Filter, bool] = True, eager: Union[prompt_toolkit.filters.base.Filter, bool] = False, is_global: Union[prompt_toolkit.filters.base.Filter, bool] = False, save_before: Callable[[KeyPressEvent], bool] = <function KeyBindings.<lambda>>, record_in_macro: Union[prompt_toolkit.filters.base.Filter, bool] = True) → Callable[[prompt_toolkit.key_binding.key_bindings.T], prompt_toolkit.key_binding.key_bindings.T]

Decorator for adding a key bindings.

Parameters

- **filter** – *Filter* to determine when this key binding is active.
- **eager** – *Filter* or *bool*. When True, ignore potential longer matches when this key binding is hit. E.g. when there is an active eager key binding for Ctrl-X, execute the handler immediately and ignore the key binding for Ctrl-X Ctrl-E of which it is a prefix.
- **is_global** – When this key bindings is added to a *Container* or *Control*, make it a global (always active) binding.
- **save_before** – Callable that takes an *Event* and returns True if we should save the current buffer, before handling the event. (That's the default.)
- **record_in_macro** – Record these key bindings when a macro is being recorded. (True by default.)

property bindings: `List[prompt_toolkit.key_binding.key_bindings.Binding]`

List of *Binding* objects. (These need to be exposed, so that *KeyBindings* objects can be merged together.)

get_bindings_for_keys(*keys*: `Tuple[Union[prompt_toolkit.keys.Keys, str], ...]`) → `List[prompt_toolkit.key_binding.key_bindings.Binding]`

Return a list of key bindings that can handle this key. (This return also inactive bindings, so the *filter* still has to be called, for checking it.)

Parameters *keys* – tuple of keys.

get_bindings_starting_with_keys(*keys*: `Tuple[Union[prompt_toolkit.keys.Keys, str], ...]`) → `List[prompt_toolkit.key_binding.key_bindings.Binding]`

Return a list of key bindings that handle a key sequence starting with *keys*. (It does only return bindings for which the sequences are longer than *keys*. And like *get_bindings_for_keys*, it also includes inactive bindings.)

Parameters *keys* – tuple of keys.

remove(**args*: `Union[prompt_toolkit.keys.Keys, str, Callable[[KeyPressEvent], Union[NotImplementedOrNone, Awaitable[NotImplementedOrNone]]]]`) → `None`

Remove a key binding.

This expects either a function that was given to *add* method as parameter or a sequence of key bindings.

Raises *ValueError* when no bindings was found.

Usage:

```
remove(handler) # Pass handler.
remove('c-x', 'c-a') # Or pass the key bindings.
```

remove_binding(**args*: `Union[prompt_toolkit.keys.Keys, str, Callable[[KeyPressEvent], Union[NotImplementedOrNone, Awaitable[NotImplementedOrNone]]]]`) → `None`

Remove a key binding.

This expects either a function that was given to *add* method as parameter or a sequence of key bindings.

Raises *ValueError* when no bindings was found.

Usage:

```
remove(handler) # Pass handler.
remove('c-x', 'c-a') # Or pass the key bindings.
```

class `prompt_toolkit.key_binding.KeyBindingsBase`

Interface for a *KeyBindings*.

abstract property bindings: `List[prompt_toolkit.key_binding.key_bindings.Binding]`

List of *Binding* objects. (These need to be exposed, so that *KeyBindings* objects can be merged together.)

abstract get_bindings_for_keys(*keys*: `Tuple[Union[prompt_toolkit.keys.Keys, str], ...]`) $\rightarrow$

`List[prompt_toolkit.key_binding.key_bindings.Binding]`

Return a list of key bindings that can handle these keys. (This return also inactive bindings, so the *filter* still has to be called, for checking it.)

Parameters *keys* – tuple of keys.

abstract get_bindings_starting_with_keys(*keys*: `Tuple[Union[prompt_toolkit.keys.Keys, str], ...]`)

$\rightarrow$

`List[prompt_toolkit.key_binding.key_bindings.Binding]`

Return a list of key bindings that handle a key sequence starting with *keys*. (It does only return bindings for which the sequences are longer than *keys*. And like *get_bindings_for_keys*, it also includes inactive bindings.)

Parameters *keys* – tuple of keys.

`prompt_toolkit.key_binding.merge_key_bindings`(*bindings*: `Sequence[prompt_toolkit.key_binding.key_bindings.KeyBindingsBase]`) $\rightarrow$

`prompt_toolkit.key_binding.key_bindings._MergedKeyBindings`

Merge multiple Keybinding objects together.

Usage:

```
bindings = merge_key_bindings([bindings1, bindings2, ...])
```

Default key bindings.:

```
key_bindings = load_key_bindings()
app = Application(key_bindings=key_bindings)
```

`prompt_toolkit.key_binding.defaults.load_key_bindings()` $\rightarrow$

`prompt_toolkit.key_binding.key_bindings.KeyBindingsBase`

Create a *KeyBindings* object that contains the default key bindings.

class `prompt_toolkit.key_binding.vi_state.InputMode`(*value*)

An enumeration.

class `prompt_toolkit.key_binding.vi_state.ViState`

Mutable class to hold the state of the Vi navigation.

property `input_mode`: `prompt_toolkit.key_binding.vi_state.InputMode`

Get *InputMode*.

last_character_find: `Optional[prompt_toolkit.key_binding.vi_state.CharacterFind]`

None or *CharacterFind* instance. (This is used to repeat the last search in Vi mode, by pressing the ‘n’ or ‘N’ in navigation mode.)

named_registers: `Dict[str, prompt_toolkit.clipboard.base.ClipboardData]`

Named registers. Maps register name (e.g. ‘a’) to *ClipboardData* instances.

reset() $\rightarrow$ None

Reset state, go back to the given mode. INSERT by default.

tilde_operator

When true, make ~ act as an operator.

waiting_for_digraph

Waiting for digraph.

An *KeyProcessor* receives callbacks for the keystrokes parsed from the input in the *InputStream* instance.

The *KeyProcessor* will according to the implemented keybindings call the correct callbacks when new key presses are feed through *feed*.

```
class prompt_toolkit.key_binding.key_processor.KeyPress(key: Union[prompt_toolkit.keys.Keys, str],
                                                         data: Optional[str] = None)
```

Parameters

- **key** – A *Keys* instance or text (one character).
- **data** – The received string on stdin. (Often vt100 escape codes.)

```
class prompt_toolkit.key_binding.key_processor.KeyPressEvent(key_processor_ref:
                                                             weakref.ReferenceType[KeyProcessor],
                                                             arg: Optional[str], key_sequence:
                                                             List[prompt_toolkit.key_binding.key_processor.KeyPress],
                                                             previous_key_sequence:
                                                             List[prompt_toolkit.key_binding.key_processor.KeyPress],
                                                             is_repeat: bool)
```

Key press event, delivered to key bindings.

Parameters

- **key_processor_ref** – Weak reference to the *KeyProcessor*.
- **arg** – Repetition argument.
- **key_sequence** – List of *KeyPress* instances.
- **previouskey_sequence** – Previous list of *KeyPress* instances.
- **is_repeat** – True when the previous event was delivered to the same handler.

property app: *Application*[Any]

The current *Application* object.

append_to_arg_count(data: str) → None

Add digit to the input argument.

Parameters **data** – the typed digit as string

property arg: int

Repetition argument.

property arg_present: bool

True if repetition argument was explicitly provided.

property cli: *Application*[Any]

For backward-compatibility.

property current_buffer: *Buffer*

The current buffer.

is_repeat

True when the previous key sequence was handled by the same handler.

class `prompt_toolkit.key_binding.key_processor.KeyProcessor`(*key_bindings:* `prompt_toolkit.key_binding.key_bindings.KeyBindingsBase`)

Statemachine that receives `KeyPress` instances and according to the key bindings in the given `KeyBindings`, calls the matching handlers.

```
p = KeyProcessor(key_bindings)

# Send keys into the processor.
p.feed(KeyPress(Keys.ControlX, ''))
p.feed(KeyPress(Keys.ControlC, ''))

# Process all the keys in the queue.
p.process_keys()

# Now the ControlX-ControlC callback will be called if this sequence is
# registered in the key bindings.
```

Parameters `key_bindings` – `KeyBindingsBase` instance.

empty_queue() → `List[prompt_toolkit.key_binding.key_processor.KeyPress]`
Empty the input queue. Return the unprocessed input.

feed(*key_press:* `prompt_toolkit.key_binding.key_processor.KeyPress`, *first:* `bool = False`) → `None`
Add a new `KeyPress` to the input queue. (Don't forget to call `process_keys` in order to process the queue.)

Parameters `first` – If true, insert before everything else.

feed_multiple(*key_presses:* `List[prompt_toolkit.key_binding.key_processor.KeyPress]`, *first:* `bool = False`) → `None`

Parameters `first` – If true, insert before everything else.

process_keys() → `None`
Process all the keys in the `input_queue`. (To be called after `feed`.)

Note: because of the `feed/process_keys` separation, it is possible to call `feed` from inside a key binding. This function keeps looping until the queue is empty.

send_sigint() → `None`
Send SIGINT. Immediately call the SIGINT key handler.

3.11.21 Eventloop

`prompt_toolkit.eventloop.get_event_loop()` → `asyncio.events.AbstractEventLoop`
Backward compatible way to get the event loop

`prompt_toolkit.eventloop.get_traceback_from_context`(*context:* `Dict[str, Any]`) → `Optional[types.TracebackType]`

Get the traceback object from the context.

3.11.22 Input

class `prompt_toolkit.input.DummyInput`

Input for use in a *DummyApplication*

attach(*input_ready_callback*: *Callable[[], None]*) → *AbstractContextManager[None]*

Return a context manager that makes this input active in the current event loop.

property closed: **bool**

Should be true when the input stream is closed.

cooked_mode() → *AbstractContextManager[None]*

Context manager that turns the input into cooked mode.

detach() → *AbstractContextManager[None]*

Return a context manager that makes sure that this input is not active in the current event loop.

fileno() → *int*

Fileno for putting this in an event loop.

raw_mode() → *AbstractContextManager[None]*

Context manager that turns the input into raw mode.

read_keys() → *List[prompt_toolkit.key_binding.key_processor.KeyPress]*

Return a list of Key objects which are read/parsed from the input.

typeahead_hash() → *str*

Identifier for storing type ahead key presses.

class `prompt_toolkit.input.Input`

Abstraction for any input.

An instance of this class can be given to the constructor of a *Application* and will also be passed to the *EventLoop*.

abstract attach(*input_ready_callback*: *Callable[[], None]*) → *AbstractContextManager[None]*

Return a context manager that makes this input active in the current event loop.

close() → *None*

Close input.

abstract property closed: **bool**

Should be true when the input stream is closed.

abstract cooked_mode() → *AbstractContextManager[None]*

Context manager that turns the input into cooked mode.

abstract detach() → *AbstractContextManager[None]*

Return a context manager that makes sure that this input is not active in the current event loop.

abstract fileno() → *int*

Fileno for putting this in an event loop.

flush() → *None*

The event loop can call this when the input has to be flushed.

flush_keys() → *List[prompt_toolkit.key_binding.key_processor.KeyPress]*

Flush the underlying parser. and return the pending keys. (Used for vt100 input.)

abstract raw_mode() → *AbstractContextManager[None]*

Context manager that turns the input into raw mode.

abstract read_keys() → *List[prompt_toolkit.key_binding.key_processor.KeyPress]*

Return a list of Key objects which are read/parsed from the input.

abstract typeahead_hash() → str
Identifier for storing type ahead key presses.

prompt_toolkit.input.create_input(stdin: Optional[TextIO] = None, always_prefer_tty: bool = False) → *prompt_toolkit.input.base.Input*
Create the appropriate *Input* object for the current os/environment.

Parameters **always_prefer_tty** – When set, if *sys.stdin* is connected to a Unix *pipe*, check whether *sys.stdout* or *sys.stderr* are connected to a pseudo terminal. If so, open the tty for reading instead of reading for *sys.stdin*. (We can open *stdout* or *stderr* for reading, this is how a *\$PAGER* works.)

prompt_toolkit.input.create_pipe_input() → *prompt_toolkit.input.base.PipeInput*
Create an input pipe. This is mostly useful for unit testing.

class prompt_toolkit.input.vt100.Vt100Input(stdin: TextIO)
Vt100 input for Posix systems. (This uses a posix file descriptor that can be registered in the event loop.)

attach(input_ready_callback: Callable[[], None]) → *AbstractContextManager[None]*
Return a context manager that makes this input active in the current event loop.

property closed: bool
Should be true when the input stream is closed.

cooked_mode() → *AbstractContextManager[None]*
Context manager that turns the input into cooked mode.

detach() → *AbstractContextManager[None]*
Return a context manager that makes sure that this input is not active in the current event loop.

fileno() → int
Fileno for putting this in an event loop.

flush_keys() → List[*prompt_toolkit.key_binding.key_processor.KeyPress*]
Flush pending keys and return them. (Used for flushing the ‘escape’ key.)

raw_mode() → *AbstractContextManager[None]*
Context manager that turns the input into raw mode.

read_keys() → List[*prompt_toolkit.key_binding.key_processor.KeyPress*]
Read list of *KeyPress*.

typeahead_hash() → str
Identifier for storing type ahead key presses.

class prompt_toolkit.input.vt100.cooked_mode(fileno: int)
The opposite of *raw_mode*, used when we need cooked mode inside a *raw_mode* block. Used in *Application.run_in_terminal*.

```
with cooked_mode(stdin):
    """ the pseudo-terminal stdin is now used in cooked mode. """
```

class prompt_toolkit.input.vt100.raw_mode(fileno: int)

```
with raw_mode(stdin):
    """ the pseudo-terminal stdin is now used in raw mode """
```

We ignore errors when executing *tcgetattr* fails.

Parser for VT100 input stream.

```
class prompt_toolkit.input.vt100_parser.Vt100Parser(feed_key_callback:
                                                    Callable[[prompt_toolkit.key_binding.key_processor.KeyPress],
                                                    None])
```

Parser for VT100 input stream. Data can be fed through the *feed* method and the given callback will be called with *KeyPress* objects.

```
def callback(key):
    pass
i = Vt100Parser(callback)
i.feed('data{...}')
```

Attr *feed_key_callback* Function that will be called when a key is parsed.

feed(*data: str*) → None
Feed the input stream.

Parameters *data* – Input string (unicode).

feed_and_flush(*data: str*) → None
Wrapper around *feed* and *flush*.

flush() → None
Flush the buffer of the input stream.

This will allow us to handle the escape key (or maybe meta) sooner. The input received by the escape key is actually the same as the first characters of e.g. Arrow-Up, so without knowing what follows the escape sequence, we don't know whether escape has been pressed, or whether it's something else. This flush function should be called after a timeout, and processes everything that's still in the buffer as-is, so without assuming any characters will follow.

Mappings from VT100 (ANSI) escape sequences to the corresponding prompt_toolkit keys.

We are not using the terminfo/termcap databases to detect the ANSI escape sequences for the input. Instead, we recognize 99% of the most common sequences. This works well, because in practice, every modern terminal is mostly Xterm compatible.

Some useful docs: - Mintty: <https://github.com/mintty/mintty/blob/master/wiki/Keycodes.md>

3.11.23 Output

```
class prompt_toolkit.output.ColorDepth(value)
    Possible color depth values for the output.
```

DEPTH_1_BIT = 'DEPTH_1_BIT'
One color only.

DEPTH_24_BIT = 'DEPTH_24_BIT'
24 bit True color.

DEPTH_4_BIT = 'DEPTH_4_BIT'
ANSI Colors.

DEPTH_8_BIT = 'DEPTH_8_BIT'
The default.

```
classmethod default() → prompt_toolkit.output.color_depth.ColorDepth
    Return the default color depth for the default output.
```

classmethod **from_env()** → Optional[prompt_toolkit.output.color_depth.ColorDepth]

Return the color depth if the \$PROMPT_TOOLKIT_COLOR_DEPTH environment variable has been set.

This is a way to enforce a certain color depth in all prompt_toolkit applications.

class prompt_toolkit.output.DummyOutput

For testing. An output class that doesn't render anything.

ask_for_cpr() → None

Asks for a cursor position report (CPR). (VT100 only.)

bell() → None

Sound bell.

clear_title() → None

Clear title again. (or restore previous title.)

cursor_backward(amount: int) → None

Move cursor *amount* place backward.

cursor_down(amount: int) → None

Move cursor *amount* place down.

cursor_forward(amount: int) → None

Move cursor *amount* place forward.

cursor_goto(row: int = 0, column: int = 0) → None

Move cursor position.

cursor_up(amount: int) → None

Move cursor *amount* place up.

disable_autowrap() → None

Disable auto line wrapping.

disable_bracketed_paste() → None

For vt100 only.

disable_mouse_support() → None

Disable mouse.

enable_autowrap() → None

Enable auto line wrapping.

enable_bracketed_paste() → None

For vt100 only.

enable_mouse_support() → None

Enable mouse.

encoding() → str

Return the encoding for this output, e.g. 'utf-8'. (This is used mainly to know which characters are supported by the output the data, so that the UI can provide alternatives, when required.)

enter_alternate_screen() → None

Go to the alternate screen buffer. (For full screen applications).

erase_down() → None

Erases the screen from the current line down to the bottom of the screen.

erase_end_of_line() → None

Erases from the current cursor position to the end of the current line.

erase_screen() → None

Erases the screen with the background colour and moves the cursor to home.

fileno() → int

There is no sensible default for fileno().

flush() → None

Write to output stream and flush.

get_default_color_depth() → [prompt_toolkit.output.color_depth.ColorDepth](#)

Get default color depth for this output.

This value will be used if no color depth was explicitly passed to the *Application*.

Note: If the `$PROMPT_TOOLKIT_COLOR_DEPTH` environment variable has been set, then `outputs.defaults.create_output` will pass this value to the implementation as the `default_color_depth`, which is returned here. (This is not used when the output corresponds to a prompt_toolkit SSH/Telnet session.)

get_rows_below_cursor_position() → int

For Windows only.

get_size() → `prompt_toolkit.data_structures.Size`

Return the size of the output window.

hide_cursor() → None

Hide cursor.

quit_alternate_screen() → None

Leave the alternate screen buffer.

reset_attributes() → None

Reset color and styling attributes.

reset_cursor_shape() → None

Reset cursor shape.

scroll_buffer_to_prompt() → None

For Win32 only.

set_attributes(*attrs*: `prompt_toolkit.styles.base.Attrs`, *color_depth*:
[prompt_toolkit.output.color_depth.ColorDepth](#)) → None

Set new color and styling attributes.

set_cursor_shape(*cursor_shape*: `prompt_toolkit.cursor_shapes.CursorShape`) → None

Set cursor shape to block, beam or underline.

set_title(*title*: *str*) → None

Set terminal title.

show_cursor() → None

Show cursor.

write(*data*: *str*) → None

Write text (Terminal escape sequences will be removed/escaped.)

write_raw(*data*: *str*) → None

Write text.

class `prompt_toolkit.output.Output`

Base class defining the output interface for a [Renderer](#).

Actual implementations are [Vt100_Output](#) and `Win32Output`.

ask_for_cpr() → None
Asks for a cursor position report (CPR). (VT100 only.)

bell() → None
Sound bell.

abstract clear_title() → None
Clear title again. (or restore previous title.)

abstract cursor_backward(amount: int) → None
Move cursor *amount* place backward.

abstract cursor_down(amount: int) → None
Move cursor *amount* place down.

abstract cursor_forward(amount: int) → None
Move cursor *amount* place forward.

abstract cursor_goto(row: int = 0, column: int = 0) → None
Move cursor position.

abstract cursor_up(amount: int) → None
Move cursor *amount* place up.

abstract disable_autowrap() → None
Disable auto line wrapping.

disable_bracketed_paste() → None
For vt100 only.

abstract disable_mouse_support() → None
Disable mouse.

abstract enable_autowrap() → None
Enable auto line wrapping.

enable_bracketed_paste() → None
For vt100 only.

abstract enable_mouse_support() → None
Enable mouse.

abstract encoding() → str
Return the encoding for this output, e.g. 'utf-8'. (This is used mainly to know which characters are supported by the output the data, so that the UI can provide alternatives, when required.)

abstract enter_alternate_screen() → None
Go to the alternate screen buffer. (For full screen applications).

abstract erase_down() → None
Erases the screen from the current line down to the bottom of the screen.

abstract erase_end_of_line() → None
Erases from the current cursor position to the end of the current line.

abstract erase_screen() → None
Erases the screen with the background colour and moves the cursor to home.

abstract fileno() → int
Return the file descriptor to which we can write for the output.

abstract flush() → None
Write to output stream and flush.

abstract `get_default_color_depth()` → *prompt_toolkit.output.color_depth.ColorDepth*

Get default color depth for this output.

This value will be used if no color depth was explicitly passed to the *Application*.

Note: If the `$PROMPT_TOOLKIT_COLOR_DEPTH` environment variable has been set, then *outputs.defaults.create_output* will pass this value to the implementation as the `default_color_depth`, which is returned here. (This is not used when the output corresponds to a *prompt_toolkit* SSH/Telnet session.)

get_rows_below_cursor_position() → int

For Windows only.

abstract `get_size()` → *prompt_toolkit.data_structures.Size*

Return the size of the output window.

abstract `hide_cursor()` → None

Hide cursor.

abstract `quit_alternate_screen()` → None

Leave the alternate screen buffer.

abstract `reset_attributes()` → None

Reset color and styling attributes.

reset_cursor_key_mode() → None

For vt100 only. Put the terminal in normal cursor mode (instead of application mode).

See: <https://vt100.net/docs/vt100-ug/chapter3.html>

abstract `reset_cursor_shape()` → None

Reset cursor shape.

property responds_to_cpr: bool

True if the *Application* can expect to receive a CPR response after calling *ask_for_cpr* (this will come back through the corresponding *Input*).

This is used to determine the amount of available rows we have below the cursor position. In the first place, we have this so that the drop down autocompletion menus are sized according to the available space.

On Windows, we don't need this, there we have *get_rows_below_cursor_position*.

scroll_buffer_to_prompt() → None

For Win32 only.

abstract `set_attributes(attrs: prompt_toolkit.styles.base.Attrs, color_depth: prompt_toolkit.output.color_depth.ColorDepth)` → None

Set new color and styling attributes.

abstract `set_cursor_shape(cursor_shape: prompt_toolkit.cursor_shapes.CursorShape)` → None

Set cursor shape to block, beam or underline.

abstract `set_title(title: str)` → None

Set terminal title.

abstract `show_cursor()` → None

Show cursor.

abstract `write(data: str)` → None

Write text (Terminal escape sequences will be removed/escaped.)

abstract `write_raw(data: str)` → None

Write text.

`prompt_toolkit.output.create_output(stdout: Optional[TextIO] = None, always_prefer_tty: bool = False)`
 → `prompt_toolkit.output.base.Output`

Return an `Output` instance for the command line.

Parameters

- **stdout** – The stdout object
- **always_prefer_tty** – When set, look for `sys.stderr` if `sys.stdout` is not a TTY. Useful if `sys.stdout` is redirected to a file, but we still want user input and output on the terminal.

By default, this is `False`. If `sys.stdout` is not a terminal (maybe it's redirected to a file), then a `PlainTextOutput` will be returned. That way, tools like `print_formatted_text` will write plain text into that file.

Output for vt100 terminals.

A lot of thanks, regarding outputting of colors, goes to the Pygments project: (We don't rely on Pygments anymore, because many things are very custom, and everything has been highly optimized.) <http://pygments.org/>

```
class prompt_toolkit.output.vt100.Vt100_Output(stdout: TextIO, get_size: Callable[[],
    prompt_toolkit.data_structures.Size], term:
    Optional[str] = None, write_binary: bool = True,
    default_color_depth: Op-
    tional[prompt_toolkit.output.color_depth.ColorDepth]
    = None, enable_bell: bool = True)
```

Parameters

- **get_size** – A callable which returns the `Size` of the output terminal.
- **stdout** – Any object with has a `write` and `flush` method + an 'encoding' property.
- **term** – The terminal environment variable. (xterm, xterm-256color, linux, ...)
- **write_binary** – Encode the output before writing it. If `True` (the default), the `stdout` object is supposed to expose an `encoding` attribute.

`ask_for_cpr()` → None
 Asks for a cursor position report (CPR).

`bell()` → None
 Sound bell.

`clear_title()` → None
 Clear title again. (or restore previous title.)

`cursor_backward(amount: int)` → None
 Move cursor *amount* place backward.

`cursor_down(amount: int)` → None
 Move cursor *amount* place down.

`cursor_forward(amount: int)` → None
 Move cursor *amount* place forward.

`cursor_goto(row: int = 0, column: int = 0)` → None
 Move cursor position.

`cursor_up(amount: int)` → None
 Move cursor *amount* place up.

disable_autowrap() → None

Disable auto line wrapping.

disable_bracketed_paste() → None

For vt100 only.

disable_mouse_support() → None

Disable mouse.

enable_autowrap() → None

Enable auto line wrapping.

enable_bracketed_paste() → None

For vt100 only.

enable_mouse_support() → None

Enable mouse.

encoding() → str

Return encoding used for stdout.

enter_alternate_screen() → None

Go to the alternate screen buffer. (For full screen applications).

erase_down() → None

Erases the screen from the current line down to the bottom of the screen.

erase_end_of_line() → None

Erases from the current cursor position to the end of the current line.

erase_screen() → None

Erases the screen with the background colour and moves the cursor to home.

fileno() → int

Return file descriptor.

flush() → None

Write to output stream and flush.

classmethod from_pty(*stdout: TextIO, term: Optional[str] = None, default_color_depth:*

Optional[prompt_toolkit.output.color_depth.ColorDepth] = None, enable_bell:

bool = True) → *prompt_toolkit.output.vt100.Vt100_Output*

Create an Output class from a pseudo terminal. (This will take the dimensions by reading the pseudo terminal attributes.)

get_default_color_depth() → *prompt_toolkit.output.color_depth.ColorDepth*

Return the default color depth for a vt100 terminal, according to the our term value.

We prefer 256 colors almost always, because this is what most terminals support these days, and is a good default.

get_size() → *prompt_toolkit.data_structures.Size*

Return the size of the output window.

hide_cursor() → None

Hide cursor.

quit_alternate_screen() → None

Leave the alternate screen buffer.

reset_attributes() → None

Reset color and styling attributes.

reset_cursor_key_mode() → None

For vt100 only. Put the terminal in cursor mode (instead of application mode).

reset_cursor_shape() → None

Reset cursor shape.

property responds_to_cpr: bool

True if the *Application* can expect to receive a CPR response after calling *ask_for_cpr* (this will come back through the corresponding *Input*).

This is used to determine the amount of available rows we have below the cursor position. In the first place, we have this so that the drop down autocompletion menus are sized according to the available space.

On Windows, we don't need this, there we have *get_rows_below_cursor_position*.

set_attributes(*attrs*: `prompt_toolkit.styles.base.Attrs`, *color_depth*: `prompt_toolkit.output.color_depth.ColorDepth`) → None

Create new style and output.

Parameters *attrs* – *Attrs* instance.

set_cursor_shape(*cursor_shape*: `prompt_toolkit.cursor_shapes.CursorShape`) → None

Set cursor shape to block, beam or underline.

set_title(*title*: str) → None

Set terminal title.

show_cursor() → None

Show cursor.

write(*data*: str) → None

Write text to output. (Removes vt100 escape codes. – used for safely writing text.)

write_raw(*data*: str) → None

Write raw data to output.

3.11.24 Patch stdout

patch_stdout

This implements a context manager that ensures that print statements within it won't destroy the user interface. The context manager will replace *sys.stdout* by something that draws the output above the current prompt, rather than overwriting the UI.

Usage:

```
with patch_stdout(application):
    ...
    application.run()
    ...
```

Multiple applications can run in the body of the context manager, one after the other.

class `prompt_toolkit.patch_stdout.StdoutProxy`(*sleep_between_writes*: float = 0.2, *raw*: bool = False)

File-like object, which prints everything written to it, output above the current application/prompt. This class is compatible with other file objects and can be used as a drop-in replacement for *sys.stdout* or can for instance be passed to *logging.StreamHandler*.

The current application, above which we print, is determined by looking what application currently runs in the *AppSession* that is active during the creation of this instance.

This class can be used as a context manager.

In order to avoid having to repaint the prompt continuously for every little write, a short delay of *sleep_between_writes* seconds will be added between writes in order to bundle many smaller writes in a short timespan.

close() → None

Stop *StdoutProxy* proxy.

This will terminate the write thread, make sure everything is flushed and wait for the write thread to finish.

flush() → None

Flush buffered output.

`prompt_toolkit.patch_stdout.patch_stdout(raw: bool = False)` → Generator[None, None, None]

Replace *sys.stdout* by an *_StdoutProxy* instance.

Writing to this proxy will make sure that the text appears above the prompt, and that it doesn't destroy the output from the renderer. If no application is curring, the behaviour should be identical to writing to *sys.stdout* directly.

Warning: If a new event loop is installed using *asyncio.set_event_loop()*, then make sure that the context manager is applied after the event loop is changed. Printing to stdout will be scheduled in the event loop that's active when the context manager is created.

Parameters **raw** – (*bool*) When True, vt100 terminal escape sequences are not removed/escaped.

INDICES AND TABLES

- `genindex`
- `modindex`
- `search`

Prompt_toolkit was created by [Jonathan Slenders](#).

PYTHON MODULE INDEX

p

- `prompt_toolkit.application`, 88
- `prompt_toolkit.auto_suggest`, 137
- `prompt_toolkit.buffer`, 98
- `prompt_toolkit.clipboard`, 104
- `prompt_toolkit.clipboard.pyperclip`, 106
- `prompt_toolkit.completion`, 106
- `prompt_toolkit.document`, 113
- `prompt_toolkit.enums`, 117
- `prompt_toolkit.eventloop`, 181
- `prompt_toolkit.filters`, 175
- `prompt_toolkit.filters.app`, 176
- `prompt_toolkit.filters.utils`, 176
- `prompt_toolkit.formatted_text`, 96
- `prompt_toolkit.history`, 117
- `prompt_toolkit.input`, 182
- `prompt_toolkit.input.ansi_escape_sequences`, 184
- `prompt_toolkit.input.vt100`, 183
- `prompt_toolkit.input.vt100_parser`, 183
- `prompt_toolkit.key_binding`, 176
- `prompt_toolkit.key_binding.defaults`, 179
- `prompt_toolkit.key_binding.key_processor`, 180
- `prompt_toolkit.key_binding.vi_state`, 179
- `prompt_toolkit.keys`, 119
- `prompt_toolkit.layout`, 143
- `prompt_toolkit.layout.processors`, 163
- `prompt_toolkit.layout.screen`, 168
- `prompt_toolkit.layout.utils`, 168
- `prompt_toolkit.lexers`, 141
- `prompt_toolkit.output`, 184
- `prompt_toolkit.output.vt100`, 189
- `prompt_toolkit.patch_stdout`, 191
- `prompt_toolkit.renderer`, 140
- `prompt_toolkit.selection`, 104
- `prompt_toolkit.shortcuts`, 124
- `prompt_toolkit.shortcuts.progress_bar.formatters`, 135
- `prompt_toolkit.styles`, 119
- `prompt_toolkit.validation`, 136
- `prompt_toolkit.widgets`, 169

INDEX

A

- `accept_handler` (`prompt_toolkit.widgets.TextArea` property), 174
- `add()` (`prompt_toolkit.key_binding.KeyBindings` method), 177
- `add_binding()` (`prompt_toolkit.key_binding.KeyBindings` method), 177
- `AdjustBrightnessStyleTransformation` (class in `prompt_toolkit.styles`), 119
- `AfterInput` (class in `prompt_toolkit.layout.processors`), 163
- `Always` (class in `prompt_toolkit.filters`), 175
- `ANSI` (class in `prompt_toolkit.formatted_text`), 96
- `app` (`prompt_toolkit.key_binding.key_processor.KeyPressEvent` property), 180
- `append_string()` (`prompt_toolkit.history.DummyHistory` method), 117
- `append_string()` (`prompt_toolkit.history.History` method), 118
- `append_string()` (`prompt_toolkit.history.ThreadedHistory` method), 119
- `append_style_to_content()` (`prompt_toolkit.layout.screen.Screen` method), 168
- `append_to_arg_count()` (`prompt_toolkit.key_binding.key_processor.KeyPressEvent` method), 180
- `append_to_history()` (`prompt_toolkit.buffer.Buffer` method), 99
- `AppendAutoSuggestion` (class in `prompt_toolkit.layout.processors`), 163
- `Application` (class in `prompt_toolkit.application`), 88
- `apply_completion()` (`prompt_toolkit.buffer.Buffer` method), 99
- `apply_search()` (`prompt_toolkit.buffer.Buffer` method), 99
- `apply_transformation()` (`prompt_toolkit.layout.processors.AfterInput` method), 163
- `apply_transformation()` (`prompt_toolkit.layout.processors.AppendAutoSuggestion` method), 163
- `apply_transformation()` (`prompt_toolkit.layout.processors.BeforeInput` method), 164
- `apply_transformation()` (`prompt_toolkit.layout.processors.ConditionalProcessor` method), 164
- `apply_transformation()` (`prompt_toolkit.layout.processors.DisplayMultipleCursors` method), 164
- `apply_transformation()` (`prompt_toolkit.layout.processors.DummyProcessor` method), 164
- `apply_transformation()` (`prompt_toolkit.layout.processors.DynamicProcessor` method), 165
- `apply_transformation()` (`prompt_toolkit.layout.processors.HighlightMatchingBracketProc` method), 165
- `apply_transformation()` (`prompt_toolkit.layout.processors.HighlightSearchProcessor` method), 165
- `apply_transformation()` (`prompt_toolkit.layout.processors.HighlightSelectionProcessor` method), 165
- `apply_transformation()` (`prompt_toolkit.layout.processors.PasswordProcessor` method), 165
- `apply_transformation()` (`prompt_toolkit.layout.processors.Processor` method), 166
- `apply_transformation()` (`prompt_toolkit.layout.processors.ReverseSearchProcessor` method), 166
- `apply_transformation()` (`prompt_toolkit.layout.processors.ShowLeadingWhiteSpaceProce` method), 166
- `apply_transformation()` (`prompt_toolkit.layout.processors.ShowTrailingWhiteSpaceProce` method), 166
- `apply_transformation()` (`prompt_toolkit.layout.processors.TabsProcessor` method), 167

`AppSession` (class in `prompt_toolkit.application`), 88

`arg` (`prompt_toolkit.key_binding.key_processor.KeyPressEvent` property), 180

`arg_present` (`prompt_toolkit.key_binding.key_processor.KeyPressEvent` property), 180

`ask_for_cpr()` (`prompt_toolkit.output.DummyOutput` method), 185

`ask_for_cpr()` (`prompt_toolkit.output.Output` method), 186

`ask_for_cpr()` (`prompt_toolkit.output.vt100.Vt100_Output` method), 189

`attach()` (`prompt_toolkit.input.DummyInput` method), 182

`attach()` (`prompt_toolkit.input.Input` method), 182

`attach()` (`prompt_toolkit.input.vt100.Vt100Input` method), 183

`Attrs` (class in `prompt_toolkit.styles`), 120

`auto_down()` (`prompt_toolkit.buffer.Buffer` method), 100

`auto_up()` (`prompt_toolkit.buffer.Buffer` method), 100

`AutoSuggest` (class in `prompt_toolkit.auto_suggest`), 137

`AutoSuggestFromHistory` (class in `prompt_toolkit.auto_suggest`), 138

B

`Bar` (class in `prompt_toolkit.shortcuts.progress_bar.formatter`), 135

`BaseStyle` (class in `prompt_toolkit.styles`), 120

`BeforeInput` (class in `prompt_toolkit.layout.processors`), 163

`bell()` (`prompt_toolkit.output.DummyOutput` method), 185

`bell()` (`prompt_toolkit.output.Output` method), 187

`bell()` (`prompt_toolkit.output.vt100.Vt100_Output` method), 189

`bgcolor` (`prompt_toolkit.styles.Attrs` property), 120

`bindings` (`prompt_toolkit.key_binding.KeyBindings` property), 178

`bindings` (`prompt_toolkit.key_binding.KeyBindingsBase` property), 178

`blink` (`prompt_toolkit.styles.Attrs` property), 120

`BLOCK` (`prompt_toolkit.selection.SelectionType` attribute), 104

`bold` (`prompt_toolkit.styles.Attrs` property), 120

`Box` (class in `prompt_toolkit.widgets`), 169

`Buffer` (class in `prompt_toolkit.buffer`), 98

`buffer_has_focus` (`prompt_toolkit.layout.Layout` property), 144

`BufferControl` (class in `prompt_toolkit.layout`), 156

`Button` (class in `prompt_toolkit.widgets`), 169

`button_dialog()` (in module `prompt_toolkit.shortcuts`), 130

C

`cancel_and_wait_for_background_tasks()` (`prompt_toolkit.application.Application` method), 91

`cancel_completion()` (`prompt_toolkit.buffer.Buffer` method), 100

`Char` (class in `prompt_toolkit.layout.screen`), 168

`char_before_cursor` (`prompt_toolkit.document.Document` property), 113

`CHARACTERS` (`prompt_toolkit.selection.SelectionType` attribute), 104

`Checkbox` (class in `prompt_toolkit.widgets`), 170

`clear()` (in module `prompt_toolkit.shortcuts`), 130

`clear()` (`prompt_toolkit.renderer.Renderer` method), 140

`clear_title()` (in module `prompt_toolkit.shortcuts`), 130

`clear_title()` (`prompt_toolkit.output.DummyOutput` method), 185

`clear_title()` (`prompt_toolkit.output.Output` method), 187

`clear_title()` (`prompt_toolkit.output.vt100.Vt100_Output` method), 189

`cli` (`prompt_toolkit.key_binding.key_processor.KeyPressEvent` property), 180

`Clipboard` (class in `prompt_toolkit.clipboard`), 104

`ClipboardData` (class in `prompt_toolkit.clipboard`), 105

`close()` (`prompt_toolkit.input.Input` method), 182

`close()` (`prompt_toolkit.patch_stdout.StdoutProxy` method), 192

`closed` (`prompt_toolkit.input.DummyInput` property), 182

`closed` (`prompt_toolkit.input.Input` property), 182

`closed` (`prompt_toolkit.input.vt100.Vt100Input` property), 183

`color` (`prompt_toolkit.styles.Attrs` property), 120

`color_depth` (`prompt_toolkit.application.Application` property), 91

`ColorColumn` (class in `prompt_toolkit.layout`), 155

`ColorDepth` (class in `prompt_toolkit.output`), 184

`complete_index` (`prompt_toolkit.buffer.CompletionState` attribute), 103

`complete_next()` (`prompt_toolkit.buffer.Buffer` method), 100

`complete_previous()` (`prompt_toolkit.buffer.Buffer` method), 100

`CompleteEvent` (class in `prompt_toolkit.completion`), 106

`Completer` (class in `prompt_toolkit.completion`), 106

`CompleteStyle` (class in `prompt_toolkit.shortcuts`), 124

`Completion` (class in `prompt_toolkit.completion`), 106

`completion_requested` (`prompt_toolkit.completion.CompleteEvent` attribute), 106

completions (*prompt_toolkit.buffer.CompletionState* attribute), 103
 CompletionsMenu (*class in prompt_toolkit.layout*), 163
 CompletionState (*class in prompt_toolkit.buffer*), 103
 Condition (*class in prompt_toolkit.filters*), 175, 176
 ConditionalAutoSuggest (*class in prompt_toolkit.auto_suggest*), 138
 ConditionalCompleter (*class in prompt_toolkit.completion*), 107
 ConditionalContainer (*class in prompt_toolkit.layout*), 152
 ConditionalKeyBindings (*class in prompt_toolkit.key_binding*), 176
 ConditionalMargin (*class in prompt_toolkit.layout*), 161
 ConditionalProcessor (*class in prompt_toolkit.layout.processors*), 164
 ConditionalStyleTransformation (*class in prompt_toolkit.styles*), 120
 ConditionalValidator (*class in prompt_toolkit.validation*), 136
 confirm() (*in module prompt_toolkit.shortcuts*), 130
 Container (*class in prompt_toolkit.layout*), 145
 cooked_mode (*class in prompt_toolkit.input.vt100*), 183
 cooked_mode() (*prompt_toolkit.input.DummyInput* method), 182
 cooked_mode() (*prompt_toolkit.input.Input* method), 182
 cooked_mode() (*prompt_toolkit.input.vt100.Vt100Input* method), 183
 copy_selection() (*prompt_toolkit.buffer.Buffer* method), 100
 cpr_not_supported_callback() (*prompt_toolkit.application.Application* method), 91
 create_app_session() (*in module prompt_toolkit.application*), 95
 create_background_task() (*prompt_toolkit.application.Application* method), 91
 create_confirm_session() (*in module prompt_toolkit.shortcuts*), 130
 create_content() (*prompt_toolkit.layout.BufferControl* method), 156
 create_content() (*prompt_toolkit.layout.DummyControl* method), 157
 create_content() (*prompt_toolkit.layout.FormattedTextControl* method), 158
 create_content() (*prompt_toolkit.layout.UIControl* method), 158
 create_default_formatters() (*in module prompt_toolkit.shortcuts.progress_bar.formatters*), 135
 create_input() (*in module prompt_toolkit.input*), 183
 create_margin() (*prompt_toolkit.layout.ConditionalMargin* method), 161
 create_margin() (*prompt_toolkit.layout.Margin* method), 160
 create_margin() (*prompt_toolkit.layout.NumberedMargin* method), 161
 create_margin() (*prompt_toolkit.layout.PromptMargin* method), 162
 create_margin() (*prompt_toolkit.layout.ScrollbarMargin* method), 161
 create_output() (*in module prompt_toolkit.output*), 188
 create_pipe_input() (*in module prompt_toolkit.input*), 183
 current_buffer (*prompt_toolkit.application.Application* property), 91
 current_buffer (*prompt_toolkit.key_binding.key_processor.KeyPressEvent* property), 180
 current_buffer (*prompt_toolkit.layout.Layout* property), 144
 current_char (*prompt_toolkit.document.Document* property), 113
 current_completion (*prompt_toolkit.buffer.CompletionState* property), 103
 current_control (*prompt_toolkit.layout.Layout* property), 144
 current_line (*prompt_toolkit.document.Document* property), 113
 current_line_after_cursor (*prompt_toolkit.document.Document* property), 113
 current_line_before_cursor (*prompt_toolkit.document.Document* property), 113
 current_search_state (*prompt_toolkit.application.Application* property), 91
 current_window (*prompt_toolkit.layout.Layout* property), 144
 cursor_backward() (*prompt_toolkit.output.DummyOutput* method), 185
 cursor_backward() (*prompt_toolkit.output.Output* method), 187
 cursor_backward() (*prompt_toolkit.output.vt100.Vt100_Output* method), 189
 cursor_down() (*prompt_toolkit.buffer.Buffer* method), 100
 cursor_down() (*prompt_toolkit.output.DummyOutput* method), 185
 cursor_down() (*prompt_toolkit.output.Output* method), 187
 cursor_down() (*prompt_toolkit.output.vt100.Vt100_Output* method), 189
 cursor_forward() (*prompt_toolkit.output.DummyOutput*

- `method`), 185
 - `cursor_forward()` (`prompt_toolkit.output.Output method`), 187
 - `cursor_forward()` (`prompt_toolkit.output.vt100.Vt100_Output method`), 189
 - `cursor_goto()` (`prompt_toolkit.output.DummyOutput method`), 185
 - `cursor_goto()` (`prompt_toolkit.output.Output method`), 187
 - `cursor_goto()` (`prompt_toolkit.output.vt100.Vt100_Output method`), 189
 - `cursor_position` (`prompt_toolkit.document.Document property`), 113
 - `cursor_position_col` (`prompt_toolkit.document.Document property`), 113
 - `cursor_position_row` (`prompt_toolkit.document.Document property`), 114
 - `cursor_positions` (`prompt_toolkit.layout.screen.Screen attribute`), 168
 - `cursor_up()` (`prompt_toolkit.buffer.Buffer method`), 100
 - `cursor_up()` (`prompt_toolkit.output.DummyOutput method`), 185
 - `cursor_up()` (`prompt_toolkit.output.Output method`), 187
 - `cursor_up()` (`prompt_toolkit.output.vt100.Vt100_Output method`), 189
 - `cut_selection()` (`prompt_toolkit.buffer.Buffer method`), 100
 - `cut_selection()` (`prompt_toolkit.document.Document method`), 114
- ## D
- `DeduplicateCompleter` (class in `prompt_toolkit.completion`), 108
 - `default()` (`prompt_toolkit.output.ColorDepth class method`), 184
 - `DEFAULT_BUFFER` (in module `prompt_toolkit.enums`), 117
 - `delete()` (`prompt_toolkit.buffer.Buffer method`), 100
 - `delete_before_cursor()` (`prompt_toolkit.buffer.Buffer method`), 100
 - `DEPTH_1_BIT` (`prompt_toolkit.output.ColorDepth attribute`), 184
 - `DEPTH_24_BIT` (`prompt_toolkit.output.ColorDepth attribute`), 184
 - `DEPTH_4_BIT` (`prompt_toolkit.output.ColorDepth attribute`), 184
 - `DEPTH_8_BIT` (`prompt_toolkit.output.ColorDepth attribute`), 184
 - `detach()` (`prompt_toolkit.input.DummyInput method`), 182
 - `detach()` (`prompt_toolkit.input.Input method`), 182
 - `detach()` (`prompt_toolkit.input.vt100.Vt100Input method`), 183
 - `Dimension` (class in `prompt_toolkit.layout`), 160
 - `disable_autowrap()` (`prompt_toolkit.output.DummyOutput method`), 185
 - `disable_autowrap()` (`prompt_toolkit.output.Output method`), 187
 - `disable_autowrap()` (`prompt_toolkit.output.vt100.Vt100_Output method`), 189
 - `disable_bracketed_paste()` (`prompt_toolkit.output.DummyOutput method`), 185
 - `disable_bracketed_paste()` (`prompt_toolkit.output.Output method`), 187
 - `disable_bracketed_paste()` (`prompt_toolkit.output.vt100.Vt100_Output method`), 190
 - `disable_mouse_support()` (`prompt_toolkit.output.DummyOutput method`), 185
 - `disable_mouse_support()` (`prompt_toolkit.output.Output method`), 187
 - `disable_mouse_support()` (`prompt_toolkit.output.vt100.Vt100_Output method`), 190
 - `display_meta` (`prompt_toolkit.completion.Completion property`), 107
 - `display_meta_text` (`prompt_toolkit.completion.Completion property`), 107
 - `display_text` (`prompt_toolkit.completion.Completion property`), 107
 - `DisplayMultipleCursors` (class in `prompt_toolkit.layout.processors`), 164
 - `Document` (class in `prompt_toolkit.document`), 113
 - `document` (`prompt_toolkit.buffer.Buffer property`), 100
 - `document` (`prompt_toolkit.widgets.TextArea property`), 174
 - `document_for_search()` (`prompt_toolkit.buffer.Buffer method`), 100
 - `draw_all_floats()` (`prompt_toolkit.layout.screen.Screen method`), 168
 - `draw_with_z_index()` (`prompt_toolkit.layout.screen.Screen method`), 168
 - `DummyApplication` (class in `prompt_toolkit.application`), 93
 - `DummyAutoSuggest` (class in `prompt_toolkit.auto_suggest`), 138
 - `DummyClipboard` (class in `prompt_toolkit.clipboard`), 105
 - `DummyCompleter` (class in `prompt_toolkit.completion`), 108
 - `DummyControl` (class in `prompt_toolkit.layout`), 157
 - `DummyHistory` (class in `prompt_toolkit.history`), 117

DummyInput (class in `prompt_toolkit.input`), 182
 DummyOutput (class in `prompt_toolkit.output`), 185
 DummyProcessor (class in `prompt_toolkit.layout.processors`), 164
 DummyStyle (class in `prompt_toolkit.styles`), 121
 DummyStyleTransformation (class in `prompt_toolkit.styles`), 121
 DummyValidator (class in `prompt_toolkit.validation`), 136
 DynamicAutoSuggest (class in `prompt_toolkit.auto_suggest`), 138
 DynamicClipboard (class in `prompt_toolkit.clipboard`), 105
 DynamicCompleter (class in `prompt_toolkit.completion`), 108
 DynamicContainer (class in `prompt_toolkit.layout`), 153
 DynamicKeyBindings (class in `prompt_toolkit.key_binding`), 176
 DynamicLexer (class in `prompt_toolkit.lexers`), 141
 DynamicProcessor (class in `prompt_toolkit.layout.processors`), 164
 DynamicStyle (class in `prompt_toolkit.styles`), 121
 DynamicStyleTransformation (class in `prompt_toolkit.styles`), 122
 DynamicValidator (class in `prompt_toolkit.validation`), 136

E

EditingMode (class in `prompt_toolkit.enums`), 117
 EditReadOnlyBuffer, 103
 empty_line_count_at_the_end() (`prompt_toolkit.document.Document` method), 114
 empty_queue() (`prompt_toolkit.key_binding.key_processor.KeyProcessor` method), 181
 enable_autowrap() (`prompt_toolkit.output.DummyOutput` method), 185
 enable_autowrap() (`prompt_toolkit.output.Output` method), 187
 enable_autowrap() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 enable_bracketed_paste() (`prompt_toolkit.output.DummyOutput` method), 185
 enable_bracketed_paste() (`prompt_toolkit.output.Output` method), 187
 enable_bracketed_paste() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 enable_mouse_support() (`prompt_toolkit.output.DummyOutput` method), 185
 enable_mouse_support() (`prompt_toolkit.output.Output` method), 187
 enable_mouse_support() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 encoding() (`prompt_toolkit.output.DummyOutput` method), 185
 encoding() (`prompt_toolkit.output.Output` method), 187
 encoding() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 end_of_paragraph() (`prompt_toolkit.document.Document` method), 114
 enter_alternate_screen() (`prompt_toolkit.output.DummyOutput` method), 185
 enter_alternate_screen() (`prompt_toolkit.output.Output` method), 187
 enter_alternate_screen() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 erase() (`prompt_toolkit.renderer.Renderer` method), 140
 erase_down() (`prompt_toolkit.output.DummyOutput` method), 185
 erase_down() (`prompt_toolkit.output.Output` method), 187
 erase_down() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 erase_end_of_line() (`prompt_toolkit.output.DummyOutput` method), 185
 erase_end_of_line() (`prompt_toolkit.output.Output` method), 187
 erase_end_of_line() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 erase_screen() (`prompt_toolkit.output.DummyOutput` method), 185
 erase_screen() (`prompt_toolkit.output.Output` method), 187
 erase_screen() (`prompt_toolkit.output.vt100.Vt100_Output` method), 190
 exact() (`prompt_toolkit.layout.Dimension` class method), 160
 ExecutableCompleter (class in `prompt_toolkit.completion`), 109
 exit() (`prompt_toolkit.application.Application` method), 91
 explode_text_fragments() (in module `prompt_toolkit.layout.utils`), 168

F

feed() (`prompt_toolkit.input.vt100_parser.Vt100Parser` method), 184
 feed() (`prompt_toolkit.key_binding.key_processor.KeyProcessor` method), 181

[feed_and_flush\(\)](#) ([prompt_toolkit.input.vt100_parser.Vt100Parser](#)([prompt_toolkit.document.Document](#) method), method), 184
[feed_multiple\(\)](#) ([prompt_toolkit.key_binding.key_processor.KeyProcessor](#) method), 181
[FileHistory](#) (class in [prompt_toolkit.history](#)), 118
[fileno\(\)](#) ([prompt_toolkit.input.DummyInput](#) method), 182
[fileno\(\)](#) ([prompt_toolkit.input.Input](#) method), 182
[fileno\(\)](#) ([prompt_toolkit.input.vt100.Vt100Input](#) method), 183
[fileno\(\)](#) ([prompt_toolkit.output.DummyOutput](#) method), 186
[fileno\(\)](#) ([prompt_toolkit.output.Output](#) method), 187
[fileno\(\)](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) method), 190
[fill_area\(\)](#) ([prompt_toolkit.layout.screen.Screen](#) method), 168
[Filter](#) (class in [prompt_toolkit.filters](#)), 175
[find\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_all\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_all_windows\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 144
[find_backwards\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_boundaries_of_current_word\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_enclosing_bracket_left\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_enclosing_bracket_right\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_matching_bracket_position\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_next_matching_line\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_next_word_beginning\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_next_word_ending\(\)](#) ([prompt_toolkit.document.Document](#) method), 114
[find_previous_matching_line\(\)](#) ([prompt_toolkit.document.Document](#) method), 115
[find_previous_word_beginning\(\)](#) ([prompt_toolkit.document.Document](#) method), 115
[find_previous_word_ending\(\)](#) ([prompt_toolkit.document.Document](#) method), 115
[find_parts_of_previous_word\(\)](#) ([prompt_toolkit.document.Document](#) method), 115
[Float](#) (class in [prompt_toolkit.layout](#)), 149
[FloatContainer](#) (class in [prompt_toolkit.layout](#)), 148
[flush\(\)](#) ([prompt_toolkit.input.Input](#) method), 182
[flush\(\)](#) ([prompt_toolkit.input.vt100_parser.Vt100Parser](#) method), 184
[flush\(\)](#) ([prompt_toolkit.output.DummyOutput](#) method), 186
[flush\(\)](#) ([prompt_toolkit.output.Output](#) method), 187
[flush\(\)](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) method), 190
[flush\(\)](#) ([prompt_toolkit.patch_stdout.StdoutProxy](#) method), 192
[flush_keys\(\)](#) ([prompt_toolkit.input.Input](#) method), 182
[flush_keys\(\)](#) ([prompt_toolkit.input.vt100.Vt100Input](#) method), 183
[focus\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 144
[focus_last\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 144
[focus_next\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 144
[focus_previous\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 144
[format\(\)](#) ([prompt_toolkit.formatted_text.ANSI](#) method), 96
[format\(\)](#) ([prompt_toolkit.formatted_text.HTML](#) method), 96
[FormattedText](#) (class in [prompt_toolkit.formatted_text](#)), 96
[FormattedTextControl](#) (class in [prompt_toolkit.layout](#)), 157
[FormattedTextToolbar](#) (class in [prompt_toolkit.widgets](#)), 170
[Formatter](#) (class in [prompt_toolkit.shortcuts.progress_bar.formatters](#)), 135
[fragment_list_len\(\)](#) (in module [prompt_toolkit.formatted_text](#)), 97
[fragment_list_to_text\(\)](#) (in module [prompt_toolkit.formatted_text](#)), 97
[fragment_list_width\(\)](#) (in module [prompt_toolkit.formatted_text](#)), 97
[Frame](#) (class in [prompt_toolkit.widgets](#)), 170
[from_callable\(\)](#) ([prompt_toolkit.validation.Validator](#) class method), 137
[from_dict\(\)](#) ([prompt_toolkit.styles.Style](#) class method), 122
[from_env\(\)](#) ([prompt_toolkit.output.ColorDepth](#) class method), 184
[from_filename\(\)](#) ([prompt_toolkit.lexers.PygmentsLexer](#) class method), 142

`from_nested_dict()` (`prompt_toolkit.completion.NestedCompleter` (`prompt_toolkit.document.Document` method), class method), 110
`from_pty()` (`prompt_toolkit.output.vt100.Vt100_Output` class method), 190
`from_pygments_lexer_cls()` (`prompt_toolkit.lexers.RegexSync` class method), 142
`FuzzyCompleter` (class in `prompt_toolkit.completion`), 109
`FuzzyWordCompleter` (class in `prompt_toolkit.completion`), 110
G
`get_app()` (in module `prompt_toolkit.application`), 95
`get_app_or_none()` (in module `prompt_toolkit.application`), 95
`get_attrs_for_style_str()` (`prompt_toolkit.styles.BaseStyle` method), 120
`get_attrs_for_style_str()` (`prompt_toolkit.styles.DummyStyle` method), 121
`get_attrs_for_style_str()` (`prompt_toolkit.styles.DynamicStyle` method), 121
`get_attrs_for_style_str()` (`prompt_toolkit.styles.Style` method), 123
`get_bindings_for_keys()` (`prompt_toolkit.key_binding.KeyBindings` method), 178
`get_bindings_for_keys()` (`prompt_toolkit.key_binding.KeyBindingsBase` method), 179
`get_bindings_starting_with_keys()` (`prompt_toolkit.key_binding.KeyBindings` method), 178
`get_bindings_starting_with_keys()` (`prompt_toolkit.key_binding.KeyBindingsBase` method), 179
`get_buffer_by_name()` (`prompt_toolkit.layout.Layout` method), 144
`get_children()` (`prompt_toolkit.layout.ConditionalContainer` method), 152
`get_children()` (`prompt_toolkit.layout.Container` method), 145
`get_children()` (`prompt_toolkit.layout.DynamicContainer` method), 153
`get_children()` (`prompt_toolkit.layout.FloatContainer` method), 149
`get_children()` (`prompt_toolkit.layout.ScrollablePane` method), 154
`get_children()` (`prompt_toolkit.layout.Window` method), 151
`get_column_cursor_position()` (`prompt_toolkit.completion.Completer` method), 106
`get_common_complete_suffix()` (in module `prompt_toolkit.completion`), 113
`get_completions()` (`prompt_toolkit.completion.Completer` method), 106
`get_completions()` (`prompt_toolkit.completion.ConditionalCompleter` method), 107
`get_completions()` (`prompt_toolkit.completion.DeduplicateCompleter` method), 108
`get_completions()` (`prompt_toolkit.completion.DummyCompleter` method), 108
`get_completions()` (`prompt_toolkit.completion.DynamicCompleter` method), 108
`get_completions()` (`prompt_toolkit.completion.FuzzyCompleter` method), 109
`get_completions()` (`prompt_toolkit.completion.FuzzyWordCompleter` method), 110
`get_completions()` (`prompt_toolkit.completion.NestedCompleter` method), 111
`get_completions()` (`prompt_toolkit.completion.PathCompleter` method), 111
`get_completions()` (`prompt_toolkit.completion.ThreadedCompleter` method), 111
`get_completions()` (`prompt_toolkit.completion.WordCompleter` method), 112
`get_completions_async()` (`prompt_toolkit.completion.Completer` method), 106
`get_completions_async()` (`prompt_toolkit.completion.ConditionalCompleter` method), 108
`get_completions_async()` (`prompt_toolkit.completion.DynamicCompleter` method), 109
`get_completions_async()` (`prompt_toolkit.completion.ThreadedCompleter` method), 112
`get_cursor_down_position()` (`prompt_toolkit.document.Document` method), 115
`get_cursor_left_position()` (`prompt_toolkit.document.Document` method), 115
`get_cursor_position()` (`prompt_toolkit.layout.screen.Screen` method), 168
`get_cursor_right_position()` (`prompt_toolkit.document.Document` method), 115
`get_cursor_up_position()` (`prompt_toolkit.document.Document` method), 115
`get_data()` (`prompt_toolkit.clipboard.Clipboard`

method), 104
 get_data() (prompt_toolkit.clipboard.DummyClipboard method), 105
 get_data() (prompt_toolkit.clipboard.DynamicClipboard method), 105
 get_data() (prompt_toolkit.clipboard.InMemoryClipboard method), 105
 get_data() (prompt_toolkit.clipboard.pyperclip.PyperclipClipboard method), 106
 get_default_color_depth() (prompt_toolkit.output.DummyOutput method), 186
 get_default_color_depth() (prompt_toolkit.output.Output method), 187
 get_default_color_depth() (prompt_toolkit.output.vt100.Vt100_Output method), 190
 get_end_of_document_position() (prompt_toolkit.document.Document method), 115
 get_end_of_line_position() (prompt_toolkit.document.Document method), 115
 get_event_loop() (in module prompt_toolkit.eventloop), 181
 get_focusable_windows() (prompt_toolkit.layout.Layout method), 144
 get_height_for_line() (prompt_toolkit.layout.UIContent method), 159
 get_invalidate_events() (prompt_toolkit.layout.BufferControl method), 156
 get_invalidate_events() (prompt_toolkit.layout.UIControl method), 158
 get_key_bindings() (prompt_toolkit.layout.BufferControl method), 156
 get_key_bindings() (prompt_toolkit.layout.Container method), 145
 get_key_bindings() (prompt_toolkit.layout.DynamicContainer method), 153
 get_key_bindings() (prompt_toolkit.layout.FloatContainer method), 149
 get_key_bindings() (prompt_toolkit.layout.FormattedTextControl method), 158
 get_key_bindings() (prompt_toolkit.layout.ScrollablePane method), 154
 get_key_bindings() (prompt_toolkit.layout.UIControl method), 159
 get_key_bindings() (prompt_toolkit.layout.Window method), 152
 get_menu_position() (prompt_toolkit.layout.screen.Screen method), 168
 get_parent() (prompt_toolkit.layout.Layout method), 145
 get_rows_below_cursor_position() (prompt_toolkit.output.DummyOutput method), 186
 get_rows_below_cursor_position() (prompt_toolkit.output.Output method), 188
 get_search_position() (prompt_toolkit.buffer.Buffer method), 100
 get_size() (prompt_toolkit.output.DummyOutput method), 186
 get_size() (prompt_toolkit.output.Output method), 188
 get_size() (prompt_toolkit.output.vt100.Vt100_Output method), 190
 get_start_of_document_position() (prompt_toolkit.document.Document method), 115
 get_start_of_line_position() (prompt_toolkit.document.Document method), 115
 get_strings() (prompt_toolkit.history.History method), 118
 get_suggestion() (prompt_toolkit.auto_suggest.AutoSuggest method), 137
 get_suggestion() (prompt_toolkit.auto_suggest.AutoSuggestFromHistory method), 138
 get_suggestion() (prompt_toolkit.auto_suggest.ConditionalAutoSuggest method), 138
 get_suggestion() (prompt_toolkit.auto_suggest.DummyAutoSuggest method), 138
 get_suggestion() (prompt_toolkit.auto_suggest.DynamicAutoSuggest method), 139
 get_suggestion() (prompt_toolkit.auto_suggest.ThreadedAutoSuggest method), 139
 get_suggestion_async() (prompt_toolkit.auto_suggest.AutoSuggest method), 137
 get_suggestion_async() (prompt_toolkit.auto_suggest.DynamicAutoSuggest method), 139
 get_suggestion_async() (prompt_toolkit.auto_suggest.ThreadedAutoSuggest method), 139
 get_sync_start_position() (prompt_toolkit.lexers.RegexSync method), 142
 get_sync_start_position() (prompt_toolkit.lexers.SyncFromStart method), 142
 get_sync_start_position() (prompt_toolkit.lexers.SyntaxSync method), 143
 get_traceback_from_context() (in module

prompt_toolkit.eventloop), 181

`get_used_style_strings()`
(*prompt_toolkit.application.Application*
method), 91

`get_visible_focusable_windows()`
(*prompt_toolkit.layout.Layout* *method*), 145

`get_width()` (*prompt_toolkit.layout.ConditionalMargin*
method), 162

`get_width()` (*prompt_toolkit.layout.Margin* *method*),
160

`get_width()` (*prompt_toolkit.layout.NumberedMargin*
method), 161

`get_width()` (*prompt_toolkit.layout.PromptMargin*
method), 162

`get_width()` (*prompt_toolkit.layout.ScrollbarMargin*
method), 161

`get_word_before_cursor()`
(*prompt_toolkit.document.Document* *method*),
115

`get_word_under_cursor()`
(*prompt_toolkit.document.Document* *method*),
115

`go_to_completion()` (*prompt_toolkit.buffer.Buffer*
method), 100

`go_to_history()` (*prompt_toolkit.buffer.Buffer*
method), 100

`go_to_index()` (*prompt_toolkit.buffer.CompletionState*
method), 103

H

`has_focus()` (*in module prompt_toolkit.filters*), 175

`has_focus()` (*in module prompt_toolkit.filters.app*), 176

`has_focus()` (*prompt_toolkit.layout.Layout* *method*),
145

`has_match_at_current_position()`
(*prompt_toolkit.document.Document* *method*),
116

`HasFocus()` (*in module prompt_toolkit.filters*), 175

`height_is_known` (*prompt_toolkit.renderer.Renderer*
property), 140

`hidden` (*prompt_toolkit.styles.Attrs* *property*), 120

`hide_cursor()` (*prompt_toolkit.output.DummyOutput*
method), 186

`hide_cursor()` (*prompt_toolkit.output.Output* *method*),
188

`hide_cursor()` (*prompt_toolkit.output.vt100.Vt100_Output*
method), 190

`HighlightIncrementalSearchProcessor` (*class in*
prompt_toolkit.layout.processors), 165

`HighlightMatchingBracketProcessor` (*class in*
prompt_toolkit.layout.processors), 165

`HighlightSearchProcessor` (*class in*
prompt_toolkit.layout.processors), 165

`HighlightSelectionProcessor` (*class in*
prompt_toolkit.layout.processors), 165

`History` (*class in prompt_toolkit.history*), 118

`history_backward()` (*prompt_toolkit.buffer.Buffer*
method), 100

`history_forward()` (*prompt_toolkit.buffer.Buffer*
method), 101

`HorizontalAlign` (*class in prompt_toolkit.layout*), 155

`HorizontalLine` (*class in prompt_toolkit.widgets*), 170

`HSplit` (*class in prompt_toolkit.layout*), 146

`HTML` (*class in prompt_toolkit.formatted_text*), 96

I

`in_editing_mode()` (*in module prompt_toolkit.filters*),
175

`in_editing_mode()` (*in module*
prompt_toolkit.filters.app), 176

`in_terminal()` (*in module prompt_toolkit.application*),
95

`indent()` (*in module prompt_toolkit.buffer*), 103

`InEditMode()` (*in module prompt_toolkit.filters*),
175

`InMemoryClipboard` (*class in*
prompt_toolkit.clipboard), 105

`InMemoryHistory` (*class in prompt_toolkit.history*), 118

`Input` (*class in prompt_toolkit.input*), 182

`input_dialog()` (*in module prompt_toolkit.shortcuts*),
130

`input_mode` (*prompt_toolkit.key_binding.vi_state.ViState*
property), 179

`InputMode` (*class in prompt_toolkit.key_binding.vi_state*),
179

`insert_after()` (*prompt_toolkit.document.Document*
method), 116

`insert_before()` (*prompt_toolkit.document.Document*
method), 116

`insert_line_above()` (*prompt_toolkit.buffer.Buffer*
method), 101

`insert_line_below()` (*prompt_toolkit.buffer.Buffer*
method), 101

`insert_text()` (*prompt_toolkit.buffer.Buffer* *method*),
101

`invalidate()` (*prompt_toolkit.application.Application*
method), 92

`invalidated` (*prompt_toolkit.application.Application*
property), 92

`invalidation_hash()`
(*prompt_toolkit.lexers.DynamicLexer* *method*),
141

`invalidation_hash()` (*prompt_toolkit.lexers.Lexer*
method), 141

`invalidation_hash()`
(*prompt_toolkit.styles.AdjustBrightnessStyleTransformation*
method), 119

`invalidation_hash()` (`prompt_toolkit.styles.BaseStyle` property), 92
`method`), 120
`invalidation_hash()` (`prompt_toolkit.styles.ConditionalStyleTransformation` method), 121
`invalidation_hash()` (`prompt_toolkit.styles.DummyStyle` method), 121
`invalidation_hash()` (`prompt_toolkit.styles.DummyStyleTransformation` method), 121
`invalidation_hash()` (`prompt_toolkit.styles.DynamicStyle` method), 122
`invalidation_hash()` (`prompt_toolkit.styles.DynamicStyleTransformation` method), 122
`invalidation_hash()` (`prompt_toolkit.styles.Style` method), 123
`invalidation_hash()` (`prompt_toolkit.styles.StyleTransformation` method), 123
`InvalidLayoutError` (class in `prompt_toolkit.layout`), 145
`is_container` (class in `prompt_toolkit.layout`), 155
`is_cursor_at_the_end` (`prompt_toolkit.document.Document` property), 116
`is_cursor_at_the_end_of_line` (`prompt_toolkit.document.Document` property), 116
`is_focusable()` (`prompt_toolkit.layout.BufferControl` method), 156
`is_focusable()` (`prompt_toolkit.layout.DummyControl` method), 157
`is_focusable()` (`prompt_toolkit.layout.FormattedTextControl` method), 158
`is_focusable()` (`prompt_toolkit.layout.UIControl` method), 159
`is_formatted_text()` (in module `prompt_toolkit.formatted_text`), 97
`is_modal()` (`prompt_toolkit.layout.Container` method), 145
`is_modal()` (`prompt_toolkit.layout.DynamicContainer` method), 153
`is_modal()` (`prompt_toolkit.layout.FloatContainer` method), 149
`is_modal()` (`prompt_toolkit.layout.ScrollablePane` method), 154
`is_repeat` (`prompt_toolkit.key_binding.key_processor.KeyPressEvent` attribute), 180
`is_returnable` (`prompt_toolkit.buffer.Buffer` property), 101
`is_running` (`prompt_toolkit.application.Application` property), 92
`is_searching` (`prompt_toolkit.layout.Layout` property), 145
`is_true()` (in module `prompt_toolkit.filters`), 175
`is_true()` (in module `prompt_toolkit.filters.utils`), 176
`is_zero()` (`prompt_toolkit.layout.Dimension` method), 160
`italic` (`prompt_toolkit.styles.Attrs` property), 120
`IterationsPerSecond` (class in `prompt_toolkit.shortcuts.progress_bar.formatters`), 135

J

`join_next_line()` (`prompt_toolkit.buffer.Buffer` method), 101
`join_selected_lines()` (`prompt_toolkit.buffer.Buffer` method), 101

K

`key_processor` (`prompt_toolkit.application.Application` attribute), 92
`KeyBindings` (class in `prompt_toolkit.key_binding`), 177
`KeyBindingsBase` (class in `prompt_toolkit.key_binding`), 178
`KeyPress` (class in `prompt_toolkit.key_binding.key_processor`), 180
`KeyPressEvent` (class in `prompt_toolkit.key_binding.key_processor`), 180
`KeyProcessor` (class in `prompt_toolkit.key_binding.key_processor`), 180
`Keys` (class in `prompt_toolkit.keys`), 119

L

`Label` (class in `prompt_toolkit.shortcuts.progress_bar.formatters`), 135
`Label` (class in `prompt_toolkit.widgets`), 170
`last_character_find` (`prompt_toolkit.key_binding.vi_state.ViState` attribute), 179
`last_non_blank_of_current_line_position()` (`prompt_toolkit.document.Document` method), 116
`last_rendered_screen` (`prompt_toolkit.renderer.Renderer` property), 140
`Layout` (class in `prompt_toolkit.layout`), 144
`leading_whitespace_in_current_line` (`prompt_toolkit.document.Document` property), 116
`lex_document()` (`prompt_toolkit.lexers.DynamicLexer` method), 141

- lex_document() (*prompt_toolkit.lexers.Lexer* method), 141
- lex_document() (*prompt_toolkit.lexers.PygmentsLexer* method), 142
- lex_document() (*prompt_toolkit.lexers.SimpleLexer* method), 142
- Lexer (class in *prompt_toolkit.lexers*), 141
- line_count (*prompt_toolkit.document.Document* property), 116
- lines (*prompt_toolkit.document.Document* property), 116
- LINES (*prompt_toolkit.selection.SelectionType* attribute), 104
- lines_from_current (*prompt_toolkit.document.Document* property), 116
- load() (*prompt_toolkit.history.History* method), 118
- load() (*prompt_toolkit.history.ThreadedHistory* method), 119
- load_history_if_not_yet_loaded() (*prompt_toolkit.buffer.Buffer* method), 101
- load_history_strings() (*prompt_toolkit.history.DummyHistory* method), 117
- load_history_strings() (*prompt_toolkit.history.FileHistory* method), 118
- load_history_strings() (*prompt_toolkit.history.History* method), 118
- load_history_strings() (*prompt_toolkit.history.InMemoryHistory* method), 118
- load_history_strings() (*prompt_toolkit.history.ThreadedHistory* method), 119
- load_key_bindings() (in module *prompt_toolkit.key_binding.defaults*), 179
- ## M
- Margin (class in *prompt_toolkit.layout*), 160
- menu_positions (*prompt_toolkit.layout.screen.Screen* attribute), 168
- MenuContainer (class in *prompt_toolkit.widgets*), 171
- merge_completers() (in module *prompt_toolkit.completion*), 113
- merge_formatted_text() (in module *prompt_toolkit.formatted_text*), 97
- merge_key_bindings() (in module *prompt_toolkit.key_binding*), 179
- merge_processors() (in module *prompt_toolkit.layout.processors*), 167
- merge_style_transformations() (in module *prompt_toolkit.styles*), 123
- merge_styles() (in module *prompt_toolkit.styles*), 123
- message_dialog() (in module *prompt_toolkit.shortcuts*), 130
- module
- prompt_toolkit.application*, 88
 - prompt_toolkit.auto_suggest*, 137
 - prompt_toolkit.buffer*, 98
 - prompt_toolkit.clipboard*, 104
 - prompt_toolkit.clipboard.pyperclip*, 106
 - prompt_toolkit.completion*, 106
 - prompt_toolkit.document*, 113
 - prompt_toolkit.enums*, 117
 - prompt_toolkit.eventloop*, 181
 - prompt_toolkit.filters*, 175
 - prompt_toolkit.filters.app*, 176
 - prompt_toolkit.filters.utils*, 176
 - prompt_toolkit.formatted_text*, 96
 - prompt_toolkit.history*, 117
 - prompt_toolkit.input*, 182
 - prompt_toolkit.input.ansi_escape_sequences*, 184
 - prompt_toolkit.input.vt100*, 183
 - prompt_toolkit.input.vt100_parser*, 183
 - prompt_toolkit.key_binding*, 176
 - prompt_toolkit.key_binding.defaults*, 179
 - prompt_toolkit.key_binding.key_processor*, 180
 - prompt_toolkit.key_binding.vi_state*, 179
 - prompt_toolkit.keys*, 119
 - prompt_toolkit.layout*, 143
 - prompt_toolkit.layout.processors*, 163
 - prompt_toolkit.layout.screen*, 168
 - prompt_toolkit.layout.utils*, 168
 - prompt_toolkit.lexers*, 141
 - prompt_toolkit.output*, 184
 - prompt_toolkit.output.vt100*, 189
 - prompt_toolkit.patch_stdout*, 191
 - prompt_toolkit.renderer*, 140
 - prompt_toolkit.selection*, 104
 - prompt_toolkit.shortcuts*, 124
 - prompt_toolkit.shortcuts.progress_bar.formatters*, 135
 - prompt_toolkit.styles*, 119
 - prompt_toolkit.validation*, 136
 - prompt_toolkit.widgets*, 169
- mouse_handler() (*prompt_toolkit.layout.BufferControl* method), 156
- mouse_handler() (*prompt_toolkit.layout.FormattedTextControl* method), 158
- mouse_handler() (*prompt_toolkit.layout.UIControl* method), 159
- move_cursor_down() (*prompt_toolkit.layout.BufferControl* method), 156
- move_cursor_down() (*prompt_toolkit.layout.UIControl* method), 159

`move_cursor_up()` (`prompt_toolkit.layout.BufferControl` method), 156

`move_cursor_up()` (`prompt_toolkit.layout.UIControl` method), 159

`MultiColumnCompletionsMenu` (class in `prompt_toolkit.layout`), 163

N

`named_registers` (`prompt_toolkit.key_binding.vi_state.ViState` attribute), 179

`NestedCompleter` (class in `prompt_toolkit.completion`), 110

`Never` (class in `prompt_toolkit.filters`), 175

`new_completion_from_position()` (`prompt_toolkit.completion.Completion` method), 107

`new_text_and_position()` (`prompt_toolkit.buffer.CompletionState` method), 103

`newline()` (`prompt_toolkit.buffer.Buffer` method), 101

`NumberedMargin` (class in `prompt_toolkit.layout`), 160O

`on_first_line` (`prompt_toolkit.document.Document` property), 116

`on_last_line` (`prompt_toolkit.document.Document` property), 116

`open_in_editor()` (`prompt_toolkit.buffer.Buffer` method), 101

`original_document` (`prompt_toolkit.buffer.CompletionState` attribute), 103

`Output` (class in `prompt_toolkit.output`), 186P

`PasswordProcessor` (class in `prompt_toolkit.layout.processors`), 165

`paste_clipboard_data()` (`prompt_toolkit.buffer.Buffer` method), 101

`paste_clipboard_data()` (`prompt_toolkit.document.Document` method), 116

`PasteMode` (class in `prompt_toolkit.selection`), 104

`patch_stdout()` (in module `prompt_toolkit.patch_stdout`), 192

`PathCompleter` (class in `prompt_toolkit.completion`), 111

`Percentage` (class in `prompt_toolkit.shortcuts.progress_bar.formatters`), 135

`preferred_height()` (`prompt_toolkit.layout.ConditionalContainer` method), 152

`preferred_height()` (`prompt_toolkit.layout.Container` method), 145

`preferred_height()` (`prompt_toolkit.layout.DynamicContainer` method), 153

`preferred_height()` (`prompt_toolkit.layout.FloatContainer` method), 149

`preferred_height()` (`prompt_toolkit.layout.FormattedTextControl` method), 158

`preferred_height()` (`prompt_toolkit.layout.HSplit` method), 147

`preferred_height()` (`prompt_toolkit.layout.ScrollablePane` method), 154

`preferred_height()` (`prompt_toolkit.layout.VSplit` method), 148

`preferred_height()` (`prompt_toolkit.layout.Window` method), 152

`preferred_width()` (`prompt_toolkit.layout.BufferControl` method), 156

`preferred_width()` (`prompt_toolkit.layout.ConditionalContainer` method), 152

`preferred_width()` (`prompt_toolkit.layout.Container` method), 145

`preferred_width()` (`prompt_toolkit.layout.DynamicContainer` method), 153

`preferred_width()` (`prompt_toolkit.layout.FloatContainer` method), 149

`preferred_width()` (`prompt_toolkit.layout.FormattedTextControl` method), 158

`preferred_width()` (`prompt_toolkit.layout.HSplit` method), 147

`preferred_width()` (`prompt_toolkit.layout.ScrollablePane` method), 155

`preferred_width()` (`prompt_toolkit.layout.VSplit` method), 148

`preferred_width()` (`prompt_toolkit.layout.Window` method), 152

`previous_control` (`prompt_toolkit.layout.Layout` property), 145

`print_formatted_text()` (in module `prompt_toolkit.renderer`), 140

`print_formatted_text()` (in module `prompt_toolkit.shortcuts`), 131

`print_text()` (`prompt_toolkit.application.Application` method), 92

`Priority` (class in `prompt_toolkit.styles`), 122

`process_keys()` (`prompt_toolkit.key_binding.key_processor.KeyProcessor` method), 181

`Processor` (class in `prompt_toolkit.layout.processors`), 165

`Progress` (class in `prompt_toolkit.shortcuts.progress_bar.formatters`), 135

`progress_dialog()` (in module `prompt_toolkit.shortcuts`), 132

`ProgressBar` (class in `prompt_toolkit.shortcuts`), 124

`prompt()` (in module `prompt_toolkit.shortcuts`), 132

`prompt()` (`prompt_toolkit.shortcuts.PromptSession` method), 128

`prompt_toolkit.application`

- module, 88
- prompt_toolkit.auto_suggest
 - module, 137
- prompt_toolkit.buffer
 - module, 98
- prompt_toolkit.clipboard
 - module, 104
- prompt_toolkit.clipboard.pyperclip
 - module, 106
- prompt_toolkit.completion
 - module, 106
- prompt_toolkit.document
 - module, 113
- prompt_toolkit.enums
 - module, 117
- prompt_toolkit.eventloop
 - module, 181
- prompt_toolkit.filters
 - module, 175
- prompt_toolkit.filters.app
 - module, 176
- prompt_toolkit.filters.utils
 - module, 176
- prompt_toolkit.formatted_text
 - module, 96
- prompt_toolkit.history
 - module, 117
- prompt_toolkit.input
 - module, 182
- prompt_toolkit.input.ansi_escape_sequences
 - module, 184
- prompt_toolkit.input.vt100
 - module, 183
- prompt_toolkit.input.vt100_parser
 - module, 183
- prompt_toolkit.key_binding
 - module, 176
- prompt_toolkit.key_binding.defaults
 - module, 179
- prompt_toolkit.key_binding.key_processor
 - module, 180
- prompt_toolkit.key_binding.vi_state
 - module, 179
- prompt_toolkit.keys
 - module, 119
- prompt_toolkit.layout
 - module, 143
- prompt_toolkit.layout.processors
 - module, 163
- prompt_toolkit.layout.screen
 - module, 168
- prompt_toolkit.layout.utils
 - module, 168
- prompt_toolkit.lexers

- module, 141
- prompt_toolkit.output
 - module, 184
- prompt_toolkit.output.vt100
 - module, 189
- prompt_toolkit.patch_stdout
 - module, 191
- prompt_toolkit.renderer
 - module, 140
- prompt_toolkit.selection
 - module, 104
- prompt_toolkit.shortcuts
 - module, 124
- prompt_toolkit.shortcuts.progress_bar.formatters
 - module, 135
- prompt_toolkit.styles
 - module, 119
- prompt_toolkit.validation
 - module, 136
- prompt_toolkit.widgets
 - module, 169
- PromptMargin (*class in prompt_toolkit.layout*), 162
- PromptSession (*class in prompt_toolkit.shortcuts*), 125
- pygments_token_to_classname() (*in module prompt_toolkit.styles*), 123
- PygmentsLexer (*class in prompt_toolkit.lexers*), 141
- PygmentsTokens (*class in prompt_toolkit.formatted_text*), 96
- PyperclipClipboard (*class in prompt_toolkit.clipboard.pyperclip*), 106

Q

- quit_alternate_screen()
 - (*prompt_toolkit.output.DummyOutput method*), 186
- quit_alternate_screen()
 - (*prompt_toolkit.output.Output method*), 188
- quit_alternate_screen()
 - (*prompt_toolkit.output.vt100.Vt100_Output method*), 190
- quoted_insert (*prompt_toolkit.application.Application attribute*), 92

R

- RadioList (*class in prompt_toolkit.widgets*), 171
- radiolist_dialog() (*in module prompt_toolkit.shortcuts*), 134
- Rainbow (*class in prompt_toolkit.shortcuts.progress_bar.formatters*), 135
- raw_mode (*class in prompt_toolkit.input.vt100*), 183
- raw_mode() (*prompt_toolkit.input.DummyInput method*), 182
- raw_mode() (*prompt_toolkit.input.Input method*), 182

[raw_mode\(\)](#) ([prompt_toolkit.input.vt100.Vt100Input](#) method), 183
[read_keys\(\)](#) ([prompt_toolkit.input.DummyInput](#) method), 182
[read_keys\(\)](#) ([prompt_toolkit.input.Input](#) method), 182
[read_keys\(\)](#) ([prompt_toolkit.input.vt100.Vt100Input](#) method), 183
[RegexSync](#) (class in [prompt_toolkit.lexers](#)), 142
[remove\(\)](#) ([prompt_toolkit.key_binding.KeyBindings](#) method), 178
[remove_binding\(\)](#) ([prompt_toolkit.key_binding.KeyBindings](#) method), 178
[render\(\)](#) ([prompt_toolkit.renderer.Renderer](#) method), 140
[render_counter](#) ([prompt_toolkit.application.Application](#) attribute), 92
[Renderer](#) (class in [prompt_toolkit.renderer](#)), 140
[report_absolute_cursor_row\(\)](#) ([prompt_toolkit.renderer.Renderer](#) method), 140
[request_absolute_cursor_position\(\)](#) ([prompt_toolkit.renderer.Renderer](#) method), 140
[reset\(\)](#) ([prompt_toolkit.application.Application](#) method), 92
[reset\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 102
[reset\(\)](#) ([prompt_toolkit.key_binding.vi_state.ViState](#) method), 179
[reset\(\)](#) ([prompt_toolkit.layout.ConditionalContainer](#) method), 152
[reset\(\)](#) ([prompt_toolkit.layout.Container](#) method), 145
[reset\(\)](#) ([prompt_toolkit.layout.DynamicContainer](#) method), 153
[reset\(\)](#) ([prompt_toolkit.layout.FloatContainer](#) method), 149
[reset\(\)](#) ([prompt_toolkit.layout.HSplit](#) method), 147
[reset\(\)](#) ([prompt_toolkit.layout.ScrollablePane](#) method), 155
[reset\(\)](#) ([prompt_toolkit.layout.VSplit](#) method), 148
[reset\(\)](#) ([prompt_toolkit.layout.Window](#) method), 152
[reset_attributes\(\)](#) ([prompt_toolkit.output.DummyOutput](#) method), 186
[reset_attributes\(\)](#) ([prompt_toolkit.output.Output](#) method), 188
[reset_attributes\(\)](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) method), 190
[reset_cursor_key_mode\(\)](#) ([prompt_toolkit.output.Output](#) method), 188
[reset_cursor_key_mode\(\)](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) method), 190
[reset_cursor_shape\(\)](#) ([prompt_toolkit.output.DummyOutput](#) method), 186
[reset_cursor_shape\(\)](#) ([prompt_toolkit.output.Output](#) method), 188
[reset_cursor_shape\(\)](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) method), 191
[reshape_text\(\)](#) (in module [prompt_toolkit.buffer](#)), 104
[responds_to_cpr](#) ([prompt_toolkit.output.Output](#) property), 188
[responds_to_cpr](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) property), 191
[reverse](#) ([prompt_toolkit.styles.Attrs](#) property), 120
[ReverseSearchProcessor](#) (class in [prompt_toolkit.layout.processors](#)), 166
[rotate\(\)](#) ([prompt_toolkit.clipboard.Clipboard](#) method), 104
[rotate\(\)](#) ([prompt_toolkit.clipboard.DummyClipboard](#) method), 105
[rotate\(\)](#) ([prompt_toolkit.clipboard.DynamicClipboard](#) method), 105
[rotate\(\)](#) ([prompt_toolkit.clipboard.InMemoryClipboard](#) method), 105
[rows_above_layout](#) ([prompt_toolkit.renderer.Renderer](#) property), 140
[run\(\)](#) ([prompt_toolkit.application.Application](#) method), 92
[run\(\)](#) ([prompt_toolkit.application.DummyApplication](#) method), 94
[run_async\(\)](#) ([prompt_toolkit.application.Application](#) method), 92
[run_async\(\)](#) ([prompt_toolkit.application.DummyApplication](#) method), 94
[run_in_terminal\(\)](#) (in module [prompt_toolkit.application](#)), 95
[run_system_command\(\)](#) ([prompt_toolkit.application.Application](#) method), 93
[run_system_command\(\)](#) ([prompt_toolkit.application.DummyApplication](#) method), 94

S

[save_to_undo_stack\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 102
[Screen](#) (class in [prompt_toolkit.layout.screen](#)), 168
[scroll_buffer_to_prompt\(\)](#) ([prompt_toolkit.output.DummyOutput](#) method), 186
[scroll_buffer_to_prompt\(\)](#) ([prompt_toolkit.output.Output](#) method), 188
[ScrollablePane](#) (class in [prompt_toolkit.layout](#)), 153
[ScrollbarMargin](#) (class in [prompt_toolkit.layout](#)), 161
[ScrollOffsets](#) (class in [prompt_toolkit.layout](#)), 155
[SEARCH_BUFFER](#) (in module [prompt_toolkit.enums](#)), 117

`search_state` (`prompt_toolkit.layout.BufferControl` property), 157
`search_target_buffer_control` (`prompt_toolkit.layout.Layout` property), 145
`SearchBufferControl` (class in `prompt_toolkit.layout`), 157
`SearchToolBar` (class in `prompt_toolkit.widgets`), 171
`selection` (`prompt_toolkit.document.Document` property), 116
`selection_range()` (`prompt_toolkit.document.Document` method), 116
`selection_range_at_line()` (`prompt_toolkit.document.Document` method), 116
`selection_ranges()` (`prompt_toolkit.document.Document` method), 117
`SelectionState` (class in `prompt_toolkit.selection`), 104
`SelectionType` (class in `prompt_toolkit.selection`), 104
`send_sigint()` (`prompt_toolkit.key_binding.key_processor.KeyProcessor` method), 181
`set_app()` (in module `prompt_toolkit.application`), 96
`set_attributes()` (`prompt_toolkit.output.DummyOutput` method), 186
`set_attributes()` (`prompt_toolkit.output.Output` method), 188
`set_attributes()` (`prompt_toolkit.output.vt100.Vt100_Output` method), 191
`set_cursor_position()` (`prompt_toolkit.layout.screen.Screen` method), 168
`set_cursor_shape()` (`prompt_toolkit.output.DummyOutput` method), 186
`set_cursor_shape()` (`prompt_toolkit.output.Output` method), 188
`set_cursor_shape()` (`prompt_toolkit.output.vt100.Vt100_Output` method), 191
`set_data()` (`prompt_toolkit.clipboard.Clipboard` method), 104
`set_data()` (`prompt_toolkit.clipboard.DummyClipboard` method), 105
`set_data()` (`prompt_toolkit.clipboard.DynamicClipboard` method), 105
`set_data()` (`prompt_toolkit.clipboard.InMemoryClipboard` method), 105
`set_data()` (`prompt_toolkit.clipboard.pyperclip.PyperclipClipboard` method), 106
`set_document()` (`prompt_toolkit.buffer.Buffer` method), 102
`set_menu_position()` (`prompt_toolkit.layout.screen.Screen` method), 168
`set_text()` (`prompt_toolkit.clipboard.Clipboard` method), 104
`set_text()` (`prompt_toolkit.clipboard.DummyClipboard` method), 105
`set_text()` (`prompt_toolkit.clipboard.DynamicClipboard` method), 105
`set_title()` (in module `prompt_toolkit.shortcuts`), 134
`set_title()` (`prompt_toolkit.output.DummyOutput` method), 186
`set_title()` (`prompt_toolkit.output.Output` method), 188
`set_title()` (`prompt_toolkit.output.vt100.Vt100_Output` method), 191
`Shadow` (class in `prompt_toolkit.widgets`), 172
`show_cursor` (`prompt_toolkit.layout.screen.Screen` attribute), 169
`show_cursor()` (`prompt_toolkit.output.DummyOutput` method), 186
`show_cursor()` (`prompt_toolkit.output.Output` method), 188
`show_cursor()` (`prompt_toolkit.output.vt100.Vt100_Output` method), 191
`ShowArg` (class in `prompt_toolkit.layout.processors`), 166
`ShowLeadingWhiteSpaceProcessor` (class in `prompt_toolkit.layout.processors`), 166
`ShowTrailingWhiteSpaceProcessor` (class in `prompt_toolkit.layout.processors`), 166
`SimpleLexer` (class in `prompt_toolkit.lexers`), 142
`SpinningWheel` (class in `prompt_toolkit.shortcuts.progress_bar.formatters`), 135
`split_lines()` (in module `prompt_toolkit.formatted_text`), 97
`start_completion()` (`prompt_toolkit.buffer.Buffer` method), 102
`start_history_lines_completion()` (`prompt_toolkit.buffer.Buffer` method), 102
`start_of_paragraph()` (`prompt_toolkit.document.Document` method), 117
`start_selection()` (`prompt_toolkit.buffer.Buffer` method), 102
`StdoutProxy` (class in `prompt_toolkit.patch_stdout`), 191
`store_string()` (`prompt_toolkit.history.DummyHistory` method), 118
`store_string()` (`prompt_toolkit.history.FileHistory` method), 118
`store_string()` (`prompt_toolkit.history.History` method), 118
`store_string()` (`prompt_toolkit.history.InMemoryHistory` method), 118
`store_string()` (`prompt_toolkit.history.ThreadedHistory` method), 119
`strike` (`prompt_toolkit.styles.Attrs` property), 120
`Style` (class in `prompt_toolkit.styles`), 122
`style_from_pygments_cls()` (in module

[prompt_toolkit.styles](#), 124
[style_from_pygments_dict\(\)](#) (in module [prompt_toolkit.styles](#)), 124
[style_rules](#) ([prompt_toolkit.styles.BaseStyle](#) property), 120
[style_rules](#) ([prompt_toolkit.styles.DummyStyle](#) property), 121
[style_rules](#) ([prompt_toolkit.styles.DynamicStyle](#) property), 122
[style_rules](#) ([prompt_toolkit.styles.Style](#) property), 123
[StyleTransformation](#) (class in [prompt_toolkit.styles](#)), 123
[Suggestion](#) (class in [prompt_toolkit.auto_suggest](#)), 139
[suspend_to_background\(\)](#) ([prompt_toolkit.application.Application](#) method), 93
[suspend_to_background\(\)](#) ([prompt_toolkit.application.DummyApplication](#) method), 95
[swap_characters_before_cursor\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 102
[SwapLightAndDarkStyleTransformation](#) (class in [prompt_toolkit.styles](#)), 123
[SyncFromStart](#) (class in [prompt_toolkit.lexers](#)), 142
[SyntaxSync](#) (class in [prompt_toolkit.lexers](#)), 143
[SYSTEM_BUFFER](#) (in module [prompt_toolkit.enums](#)), 117
[SystemToolbar](#) (class in [prompt_toolkit.widgets](#)), 172

T

[TabsProcessor](#) (class in [prompt_toolkit.layout.processors](#)), 166
[Template](#) (class in [prompt_toolkit.formatted_text](#)), 97
[Text](#) (class in [prompt_toolkit.shortcuts.progress_bar.formatters](#)), 135
[text](#) ([prompt_toolkit.document.Document](#) property), 117
[text](#) ([prompt_toolkit.widgets.TextArea](#) property), 174
[text_inserted](#) ([prompt_toolkit.completion.CompleteEvent](#) attribute), 106
[TextArea](#) (class in [prompt_toolkit.widgets](#)), 172
[ThreadedAutoSuggest](#) (class in [prompt_toolkit.auto_suggest](#)), 139
[ThreadedCompleter](#) (class in [prompt_toolkit.completion](#)), 111
[ThreadedHistory](#) (class in [prompt_toolkit.history](#)), 118
[ThreadedValidator](#) (class in [prompt_toolkit.validation](#)), 136
[tilde_operator](#) ([prompt_toolkit.key_binding.vi_state.ViState](#) attribute), 179
[TimeElapsed](#) (class in [prompt_toolkit.shortcuts.progress_bar.formatters](#)), 135
[TimeLeft](#) (class in [prompt_toolkit.shortcuts.progress_bar.formatters](#)), 135
[timeoutlen](#) ([prompt_toolkit.application.Application](#) attribute), 93
[to_container](#) (class in [prompt_toolkit.layout](#)), 155
[to_filter\(\)](#) (in module [prompt_toolkit.filters](#)), 175
[to_filter\(\)](#) (in module [prompt_toolkit.filters.utils](#)), 176
[to_formatted_text\(\)](#) (in module [prompt_toolkit.formatted_text](#)), 98
[to_plain_text\(\)](#) (in module [prompt_toolkit.formatted_text](#)), 98
[to_window](#) (class in [prompt_toolkit.layout](#)), 155
[transform_attrs\(\)](#) ([prompt_toolkit.styles.AdjustBrightnessStyleTransformation](#) method), 119
[transform_attrs\(\)](#) ([prompt_toolkit.styles.ConditionalStyleTransformation](#) method), 121
[transform_attrs\(\)](#) ([prompt_toolkit.styles.DummyStyleTransformation](#) method), 121
[transform_attrs\(\)](#) ([prompt_toolkit.styles.DynamicStyleTransformation](#) method), 122
[transform_attrs\(\)](#) ([prompt_toolkit.styles.StyleTransformation](#) method), 123
[transform_attrs\(\)](#) ([prompt_toolkit.styles.SwapLightAndDarkStyleTransformation](#) method), 123
[transform_current_line\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 102
[transform_lines\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 102
[transform_region\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 103
[Transformation](#) (class in [prompt_toolkit.layout.processors](#)), 167
[TransformationInput](#) (class in [prompt_toolkit.layout.processors](#)), 167
[translate_index_to_position\(\)](#) ([prompt_toolkit.document.Document](#) method), 117
[translate_row_col_to_index\(\)](#) ([prompt_toolkit.document.Document](#) method), 117
[ttimeoutlen](#) ([prompt_toolkit.application.Application](#) attribute), 93
[typeahead_hash\(\)](#) ([prompt_toolkit.input.DummyInput](#) method), 182
[typeahead_hash\(\)](#) ([prompt_toolkit.input.Input](#) method), 182
[typeahead_hash\(\)](#) ([prompt_toolkit.input.vt100.Vt100Input](#) method), 183
[UIContent](#) (class in [prompt_toolkit.layout](#)), 159
[UIControl](#) (class in [prompt_toolkit.layout](#)), 158
[underline](#) ([prompt_toolkit.styles.Attrs](#) property), 120
[unindent\(\)](#) (in module [prompt_toolkit.buffer](#)), 104
[update_parents_relations\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 145

V

[validate\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 103
[validate\(\)](#) ([prompt_toolkit.validation.ConditionalValidator](#) method), 136
[validate\(\)](#) ([prompt_toolkit.validation.DummyValidator](#) method), 136
[validate\(\)](#) ([prompt_toolkit.validation.DynamicValidator](#) method), 136
[validate\(\)](#) ([prompt_toolkit.validation.ThreadedValidator](#) method), 136
[validate\(\)](#) ([prompt_toolkit.validation.Validator](#) method), 137
[validate_and_handle\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 103
[validate_async\(\)](#) ([prompt_toolkit.validation.DynamicValidator](#) method), 136
[validate_async\(\)](#) ([prompt_toolkit.validation.ThreadedValidator](#) method), 136
[validate_async\(\)](#) ([prompt_toolkit.validation.Validator](#) method), 137
[ValidationError](#), 136
[Validator](#) (class in [prompt_toolkit.validation](#)), 136
[VerticalAlign](#) (class in [prompt_toolkit.layout](#)), 155
[VerticalLine](#) (class in [prompt_toolkit.widgets](#)), 174
[vi_state](#) ([prompt_toolkit.application.Application](#) attribute), 93
[ViState](#) (class in [prompt_toolkit.key_binding.vi_state](#)), 179
[VSplit](#) (class in [prompt_toolkit.layout](#)), 147
[Vt100_Output](#) (class in [prompt_toolkit.output.vt100](#)), 189
[Vt100Input](#) (class in [prompt_toolkit.input.vt100](#)), 183
[Vt100Parser](#) (class in [prompt_toolkit.input.vt100_parser](#)), 183

W

[wait_for_cpr_responses\(\)](#) ([prompt_toolkit.renderer.Renderer](#) method), 140
[waiting_for_cpr](#) ([prompt_toolkit.renderer.Renderer](#) property), 140
[waiting_for_digraph](#) ([prompt_toolkit.key_binding.vi_state.ViState](#) attribute), 179
[walk](#) (class in [prompt_toolkit.layout](#)), 145
[walk\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 145
[walk_through_modal_area\(\)](#) ([prompt_toolkit.layout.Layout](#) method), 145
[width](#) ([prompt_toolkit.layout.screen.Screen](#) attribute), 169
[Window](#) (class in [prompt_toolkit.layout](#)), 150
[WindowAlign](#) (class in [prompt_toolkit.layout](#)), 152
[WordCompleter](#) (class in [prompt_toolkit.completion](#)), 112

[write\(\)](#) ([prompt_toolkit.output.DummyOutput](#) method), 186
[write\(\)](#) ([prompt_toolkit.output.Output](#) method), 188
[write\(\)](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) method), 191
[write_raw\(\)](#) ([prompt_toolkit.output.DummyOutput](#) method), 186
[write_raw\(\)](#) ([prompt_toolkit.output.Output](#) method), 188
[write_raw\(\)](#) ([prompt_toolkit.output.vt100.Vt100_Output](#) method), 191
[write_to_screen\(\)](#) ([prompt_toolkit.layout.ConditionalContainer](#) method), 152
[write_to_screen\(\)](#) ([prompt_toolkit.layout.Container](#) method), 146
[write_to_screen\(\)](#) ([prompt_toolkit.layout.DynamicContainer](#) method), 153
[write_to_screen\(\)](#) ([prompt_toolkit.layout.FloatContainer](#) method), 149
[write_to_screen\(\)](#) ([prompt_toolkit.layout.HSplit](#) method), 147
[write_to_screen\(\)](#) ([prompt_toolkit.layout.ScrollablePane](#) method), 155
[write_to_screen\(\)](#) ([prompt_toolkit.layout.VSplit](#) method), 148
[write_to_screen\(\)](#) ([prompt_toolkit.layout.Window](#) method), 152

Y

[yank_last_arg\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 103
[yank_nth_arg\(\)](#) ([prompt_toolkit.buffer.Buffer](#) method), 103
[yes_no_dialog\(\)](#) (in module [prompt_toolkit.shortcuts](#)), 134

Z

[zero\(\)](#) ([prompt_toolkit.layout.Dimension](#) class method), 160
[zero_width_escapes](#) ([prompt_toolkit.layout.screen.Screen](#) attribute), 169