

---

**prompt***toolkit* Documentation

**Release 3.0.39**

**Jonathan Slenders**

**Jul 04, 2023**



---

# Contents

---


<b>1</b>	<b>Getting started</b>	<b>3</b>
<b>2</b>	<b>Thanks to:</b>	<b>5</b>
<b>3</b>	<b>Table of contents</b>	<b>7</b>
3.1	Gallery . . . . .	7
3.2	Getting started . . . . .	10
3.3	Upgrading . . . . .	12
3.4	Printing (and using) formatted text . . . . .	16
3.5	Asking for input (prompts) . . . . .	20
3.6	Dialogs . . . . .	38
3.7	Progress bars . . . . .	47
3.8	Building full screen applications . . . . .	51
3.9	Tutorials . . . . .	56
3.10	Advanced topics . . . . .	64
3.11	Reference . . . . .	84
<b>4</b>	<b>Indices and tables</b>	<b>167</b>
	<b>Python Module Index</b>	<b>169</b>
	<b>Index</b>	<b>171</b>



**Warning:** Notice that this is the prompt\_toolkit 3.0 documentation. It is mostly compatible with the 2.0 branch. The difference is that prompt\_toolkit 3.0 requires at least Python 3.6. On the plus side, it uses asyncio natively (rather than its own event loop), and we have type annotations everywhere.

*prompt\_toolkit* is a library for building powerful interactive command line and terminal applications in Python.

It can be a very advanced pure Python replacement for GNU *readline*, but it can also be used for building full screen applications.

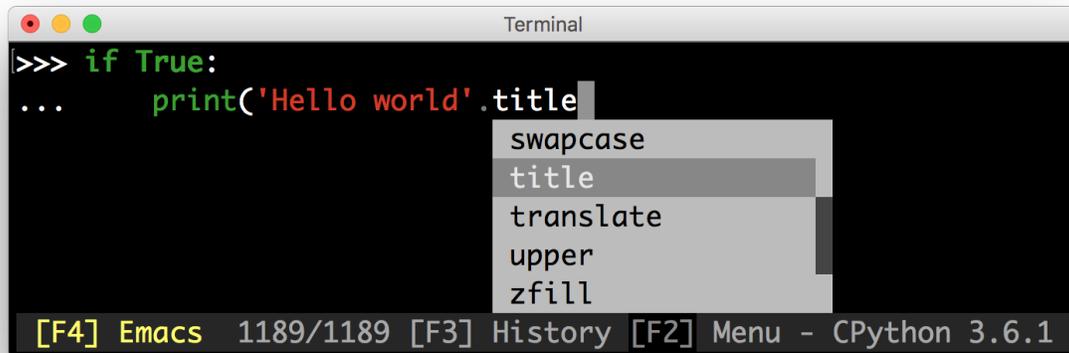

```
Terminal
>>> if True:
...   print('Hello world'.title
swapcase
title
translate
upper
zfill
[F4] Emacs 1189/1189 [F3] History [F2] Menu - CPython 3.6.1
```

Some features:

- Syntax highlighting of the input while typing. (For instance, with a Pygments lexer.)
- Multi-line input editing.
- Advanced code completion.
- Selecting text for copy/paste. (Both Emacs and Vi style.)
- Mouse support for cursor positioning and scrolling.
- Auto suggestions. (Like *fish shell*.)
- No global state.

Like *readline*:

- Both Emacs and Vi key bindings.
- Reverse and forward incremental search.
- Works well with Unicode double width characters. (Chinese input.)

Works everywhere:

- Pure Python. Runs on all Python versions starting at Python 3.6. (Python 2.6 - 3.x is supported in prompt\_toolkit 2.0; not 3.0).
- Runs on Linux, OS X, OpenBSD and Windows systems.
- Lightweight, the only dependencies are Pygments and *wcwidth*.
- No assumptions about I/O are made. Every prompt\_toolkit application should also run in a telnet/ssh server or an *asyncio* process.

Have a look at [the gallery](#) to get an idea of what is possible.

# CHAPTER 1

---

## Getting started

---

Go to *getting started* and build your first prompt. Issues are tracked on the [Github project](#).



## CHAPTER 2

---

Thanks to:

---

A special thanks to all the [contributors](#) for making `prompt_toolkit` possible.

Also, a special thanks to the [Pygments](#) and [wcmwidth](#) libraries.




## 3.1 Gallery

Showcase, demonstrating the possibilities of `prompt_toolkit`.

### 3.1.1 Ptpython, a Python REPL

The prompt:

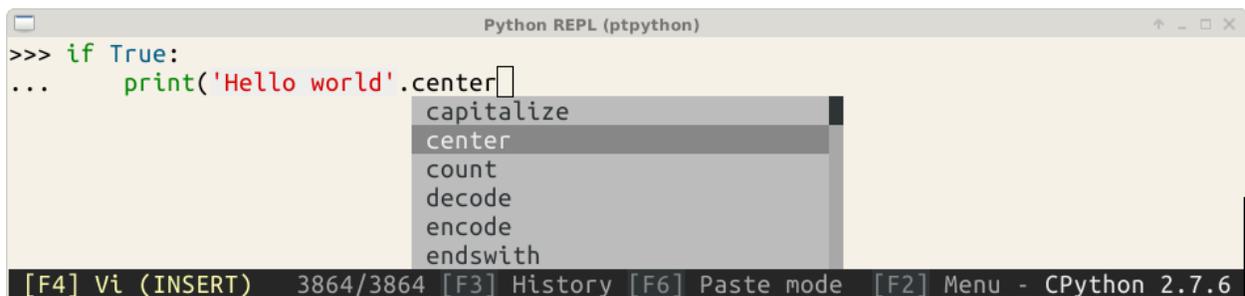


```
Python REPL (ptpython)
>>> if True:
...     print('Hello world'.center█
      capitalize
      center
      count
      decode
      encode
      endswith
[F4] Vi (INSERT) 3864/3864 [F3] History [F6] Paste mode [F2] Menu - CPython 2.7.6
```

The configuration menu of `ptpython`.



The history page with its help. (This is a full-screen layout.)

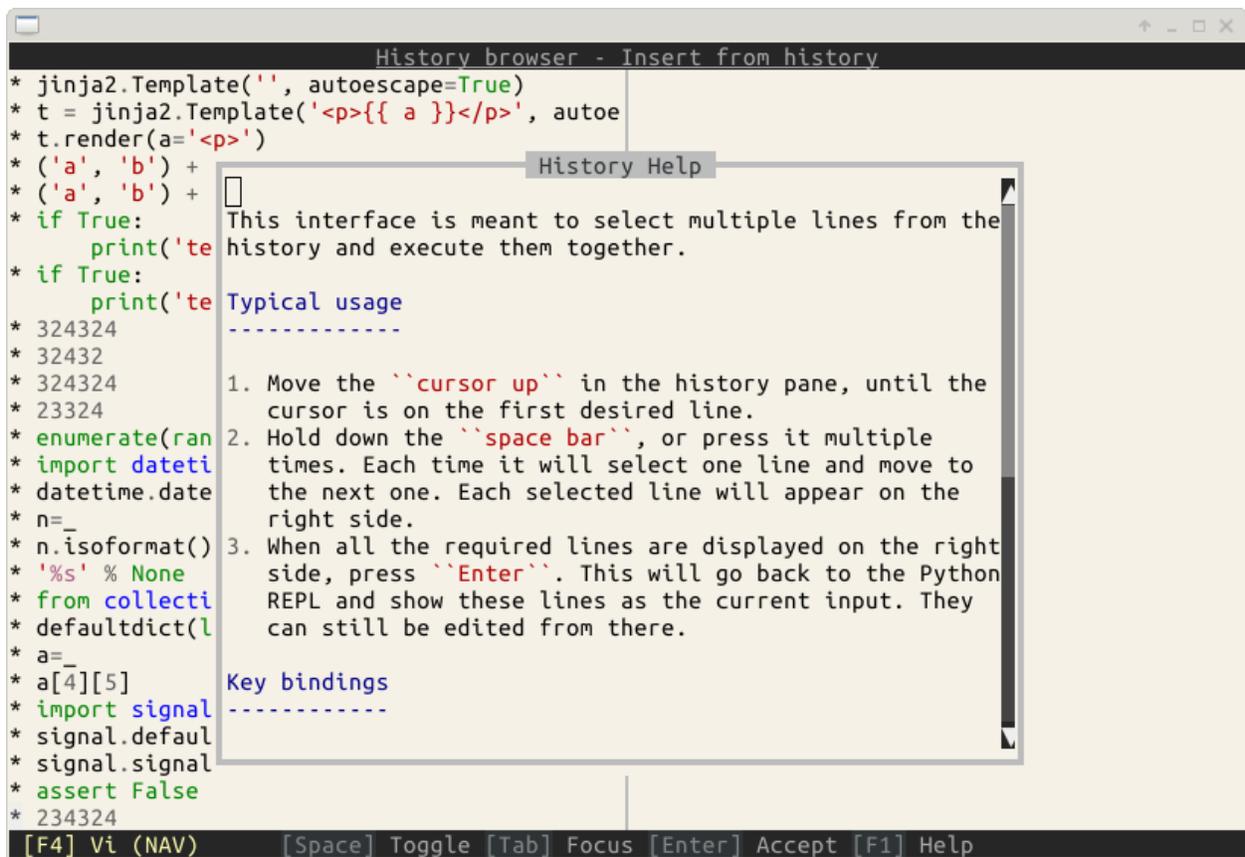

### 3.1.2 Pyvim, a Vim clone

```

Terminal
editor.py | reporting.py
5
6     files_to_edit = ['file1.txt', 'file2.py']
7     e = Editor(files_to_edit)
8     e.run() # Runs the event loop, starts interaction.
9     """
10  from __future__ import unicode_literals
11
12  from prompt_toolkit.buffer import Buffer, AcceptAction
13  from prompt_toolkit.contrib.shortcuts import create_eventloop
14  from prompt_toolkit.enums import SEARCH_BUFFER
15  from prompt_toolkit.filters import Always, Condition
16  from prompt_toolkit.history import FileHistory
17  from prompt_toolkit.interface import CommandLineInterface, AbortAction
18  from prompt_toolkit.key_binding.vi_state import InputMode
19
20  from .commands.completer import create_command_completer
21  from .commands.handler import handle_command
22  from .commands.preview import CommandPreviewer
23  from .editor_buffer import EditorBuffer
24  from .enums import COMMAND_BUFFER
25  from .help import HELP_TEXT
26  from .key_bindings import create_key_bindings
27  from .layout import EditorLayout
28  from .reporting import report
29  from .style import generate_built_in_styles, get_editor_style_by_name
30  from .window_arrangement import WindowArrangement
31
32  import pygments
33  import os
34
35  __all__ = (
36      'Editor',
37  )
38
39  class Editor(object):
40      """
41      The main class. Containing the whole editor.
42      """
43
44
45
46
47
48
49
50
51
52     return tokens, lambda i: i
53
54
55     class ShowTabsProcessor(Processor):
56         """
57         Render tabs as spaces or make them visible.
58         """
59         def __init__(self, editor):
60             self.editor = editor
61
62         def run(self, cli, document, tokens):
63             tabstop = self.editor.tabstop
64
65             # Create separator for tabs.
66             dots = '\u2508'
67             separator = dots * tabstop
68
69             # Remember the positions where we replace the tab.
70             positions = set()
71
72             # Replace tab by separator.
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
258
```

### 3.1.3 Pymux, a terminal multiplexer (like tmux) in Python

```

~/git/pymux - Pymux
~/git/pymux 1
1  [ | 3.9%] Tasks: 130; 1 running
2  [ | 2.0%] Load average: 0.05 0.08 0.09
Mem [|||||] 553/3029MB Uptime: 17:14:01
Swp [ 0/4092MB]

PID USER PRI NI VIRT RES SHR S CPU% MEM% TIME+
23776 jonathan 20 0 69528 20980 2204 S 2.0 0.7 0:06.77
1051 root 20 0 127M 54220 14752 S 1.3 1.7 3:22.25
24012 jonathan 20 0 203M 13800 9552 S 0.7 0.4 0:00.05
23915 jonathan 20 0 5504 1764 1312 R 0.7 0.1 0:01.05
2511 jonathan 20 0 209M 21548 11216 S 0.7 0.7 2:48.03
23627 jonathan 20 0 259M 58284 23232 S 0.0 1.9 0:03.22
2121 jonathan 20 0 126M 10616 7808 S 0.0 0.3 0:02.22
2211 jonathan 20 0 178M 15292 10924 S 0.0 0.5 0:05.87
F1Help F2Setup F3Search F4Filter F5Tree F6SortBy F7Nice F8Nice

~/git/pymux 2
jonathan@jonathan-VirtualBox ~/git/pymux
$ ls
examples          pymux             README.rst
LICENSE           pymux.egg-info   setup.py
prompt-toolkit-render-input.log README.2.rst      TODO

jonathan@jonathan-VirtualBox ~/git/pymux
$ ^C

jonathan@jonathan-VirtualBox ~/git/pymux
$

commands/commands.py - Pyvim
utils.py | commands.py
264 @cmd('swap-pane', options='(-D|-U)')
265 def swap_pane(pymux, cli, variables):
266     pymux.arrangement.get_active_window(cli).rotate(wit
267
268
269 @cmd('kill-pane')
270 def kill_pane(pymux, cli, variables):
271     pane = pymux.arrangement.get_active_pane(cli)
272     pymux.kill_pane(pane)
273
274
275 @cmd('kill-window')
276 def kill_window(pymux, cli, variables):
277     " Kill all panes in the current window. "
278     for pane in pymux.arrangement.get_active_window(cli)
279         pymux.kill_pane(pane)
280
281
282 @cmd('suspend-client')
283 def suspend_client(pymux, cli, variables):
284     connection = pymux.get_connection_for_cli(cli)
285
286     if connection:
287         connection.suspend_client_to_background()
288
289
290 @cmd('clock-mode')
291 def clock_mode(pymux, cli, variables):
292     pane = pymux.arrangement.get_active_pane(cli)
293     if pane:
(290,7) - 42%

```

## 3.2 Getting started

### 3.2.1 Installation

```
pip install prompt_toolkit
```

For Conda, do:

```
conda install -c https://conda.anaconda.org/conda-forge prompt_toolkit
```

### 3.2.2 Several use cases: prompts versus full screen terminal applications

*prompt\_toolkit* was in the first place meant to be a replacement for *readline*. However, when it became more mature, we realised that all the components for full screen applications are there and *prompt\_toolkit* is very capable of handling many use situations. *Pyvim* and *pymux* are examples of full screen applications.

```

editor.py | reporting.py
5
6     files_to_edit = ['file1.txt', 'file2.py']
7     e = Editor(files_to_edit)
8     e.run() # Runs the event loop, starts interaction.
9     """
10    from __future__ import unicode_literals
11
12    from prompt_toolkit.buffer import Buffer, AcceptAction
13    from prompt_toolkit.contrib.shortcuts import create_eventloop
14    from prompt_toolkit.enums import SEARCH_BUFFER
15    from prompt_toolkit.filters import Always, Condition
16    from prompt_toolkit.history import FileHistory
17    from prompt_toolkit.interface import CommandLineInterface, AbortAction
18    from prompt_toolkit.key_binding.vi_state import InputMode
19
20    from .commands.completer import create_command_completer
21    from .commands.handler import handle_command
22    from .commands.preview import CommandPreviewer
23    from .editor_buffer import EditorBuffer
24    from .enums import COMMAND_BUFFER
25    from .help import HELP_TEXT
26    from .key_bindings import create_key_bindings
27    from .layout import EditorLayout
28    from .reporting import report
29    from .style import generate_built_in_styles, get_editor_style_by_name
30    from .window_arrangement import WindowArrangement
31
32    import pygments
33    import os
34
35    __all__ = (
36        'Editor',
37    )
38
39    class Editor(object):
40        """
41        The main class. Containing the whole editor.
42        """
43
44
45
46
47
48
49
50
51
52     return tokens, lambda i: i
53
54
55     class ShowTabsProcessor(Processor):
56         """
57         Render tabs as spaces or make them visible.
58         """
59         def __init__(self, editor):
60             self.editor = editor
61
62         def run(self, cli, document, tokens):
63             tabstop = self.editor.tabstop
64
65             # Create separator for tabs.
66             dots = '\u2508'
67             separator = dots * tabstop
68
69             # Remember the positions where we replace the tab.
70             positions = set()
71
72             # Replace tab by separator.
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

```

Basically, at the core, *prompt\_toolkit* has a layout engine, that supports horizontal and vertical splits as well as floats, where each “window” can display a user control. The API for user controls is simple yet powerful.

When *prompt\_toolkit* is used as a readline replacement, (to simply read some input from the user), it uses a rather simple built-in layout. One that displays the default input buffer and the prompt, a float for the autocompletions and a toolbar for input validation which is hidden by default.

For full screen applications, usually we build a custom layout ourselves.

Further, there is a very flexible key binding system that can be programmed for all the needs of full screen applications.

### 3.2.3 A simple prompt

The following snippet is the most simple example, it uses the `prompt()` function to asks the user for input and returns the text. Just like `(raw_)input`.

```

from prompt_toolkit import prompt

text = prompt('Give me some input: ')
print('You said: %s' % text)

```

### 3.2.4 Learning *prompt\_toolkit*

In order to learn and understand *prompt\_toolkit*, it is best to go through the all sections in the order below. Also don’t forget to have a look at all the [examples](#) in the repository.

- First, *learn how to print text*. This is important, because it covers how to use “formatted text”, which is something you’ll use whenever you want to use colors anywhere.

- Secondly, go through the *asking for input* section. This is useful for almost any use case, even for full screen applications. It covers autocompletions, syntax highlighting, key bindings, and so on.
- Then, learn about *Dialogs*, which is easy and fun.
- Finally, learn about *full screen applications* and read through *the advanced topics*.

## 3.3 Upgrading

### 3.3.1 Upgrading to prompt\_toolkit 2.0

Prompt\_toolkit 2.0 is not compatible with 1.0, however you probably want to upgrade your applications. This page explains why we have these differences and how to upgrade.

If you experience some difficulties or you feel that some information is missing from this page, don't hesitate to open a GitHub issue for help.

#### Why all these breaking changes?

After more and more custom prompt\_toolkit applications were developed, it became clear that prompt\_toolkit 1.0 was not flexible enough for certain use cases. Mostly, the development of full screen applications was not really natural. All the important components, like the rendering, key bindings, input and output handling were present, but the API was in the first place designed for simple command line prompts. This was mostly notably in the following two places:

- First, there was the focus which was always pointing to a *Buffer* (or text input widget), but in full screen applications there are other widgets, like menus and buttons which can be focused.
- And secondly, it was impossible to make reusable UI components. All the key bindings for the entire applications were stored together in one *KeyBindings* object, and similar, all *Buffer* objects were stored together in one dictionary. This didn't work well. You want reusable components to define their own key bindings and everything. It's the idea of encapsulation.

For simple prompts, the changes wouldn't be that invasive, but given that there would be some, I took the opportunity to fix a couple of other things. For instance:

- In prompt\_toolkit 1.0, we translated `\r` into `\n` during the input processing. This was not a good idea, because some people wanted to handle these keys individually. This makes sense if you keep in mind that they correspond to *Control-M* and *Control-J*. However, we couldn't fix this without breaking everyone's enter key, which happens to be the most important key in prompts.

Given that we were going to break compatibility anyway, we changed a couple of other important things that effect both simple prompt applications and full screen applications. These are the most important:

- We no longer depend on Pygments for styling. While we like Pygments, it was not flexible enough to provide all the styling options that we need, and the Pygments tokens were not ideal for styling anything besides tokenized text.

Instead we created something similar to CSS. All UI components can attach classnames to themselves, as well as define an inline style. The final style is then computed by combining the inline styles, the classnames and the style sheet.

There are still adaptors available for using Pygments lexers as well as for Pygments styles.

- The way that key bindings were defined was too complex. *KeyBindingsManager* was too complex and no longer exists. Every set of key bindings is now a *KeyBindings* object and multiple of these can be merged together at any time. The runtime performance remains the same, but it's now easier for users.

- The separation between the `CommandLineInterface` and `Application` class was confusing and in the end, didn't really had an advantage. These two are now merged together in one `Application` class.
- We no longer pass around the active `CommandLineInterface`. This was one of the most annoying things. Key bindings need it in order to change anything and filters need it in order to evaluate their state. It was pretty annoying, especially because there was usually only one application active at a time. So, `Application` became a `TaskLocal`. That is like a global variable, but scoped in the current coroutine or context. The way this works is still not 100% correct, but good enough for the projects that need it (like Pymux), and hopefully Python will get support for this in the future thanks to PEP521, PEP550 or PEP555.

All of these changes have been tested for many months, and I can say with confidence that `prompt_toolkit 2.0` is a better `prompt_toolkit`.

## Some new features

Apart from the breaking changes above, there are also some exciting new features.

- We now support vt100 escape codes for Windows consoles on Windows 10. This means much faster rendering, and full color support.
- We have a concept of formatted text. This is an object that evaluates to styled text. Every input that expects some text, like the message in a prompt, or the text in a toolbar, can take any kind of formatted text as input. This means you can pass in a plain string, but also a list of `(style, text)` tuples (similar to a Pygments tokenized string), or an `HTML` object. This simplifies many APIs.
- New utilities were added. We now have function for printing formatted text and an experimental module for displaying progress bars.
- Autocompletion, input validation, and auto suggestion can now either be asynchronous or synchronous. By default they are synchronous, but by wrapping them in `ThreadedCompleter`, `ThreadedValidator` or `ThreadedAutoSuggest`, they will become asynchronous by running in a background thread.

Further, if the autocompletion code runs in a background thread, we will show the completions as soon as they arrive. This means that the autocompletion algorithm could for instance first yield the most trivial completions and then take time to produce the completions that take more time.

## Upgrading

More guidelines on how to upgrade will follow.

### ***AbortAction* has been removed**

`prompt_toolkit 1.0` had an argument `abort_action` for both the `Application` class as well as for the `prompt` function. This has been removed. The recommended way to handle this now is by capturing `KeyboardInterrupt` and `EOFError` manually.

### **Calling *create\_eventloop* usually not required anymore**

`prompt_toolkit 2.0` will automatically create the appropriate event loop when it's needed for the first time. There is no need to create one and pass it around. If you want to run an application on top of `asyncio` (without using an executor), it still needs to be activated by calling `use_asyncio_event_loop()` at the beginning.

## Pygments styles and tokens

prompt\_toolkit 2.0 no longer depends on `Pygments`, but that definitely doesn't mean that you can't use any `Pygments` functionality anymore. The only difference is that `Pygments` stuff needs to be wrapped in an adaptor to make it compatible with the native `prompt_toolkit` objects.

- For instance, if you have a list of `(pygments.Token, text)` tuples for formatting, then this needs to be wrapped in a `PygmentsTokens` object. This is an adaptor that turns it into `prompt_toolkit` "formatted text". Feel free to keep using this.
- `Pygments` lexers need to be wrapped in a `PygmentsLexer`. This will convert the list of `Pygments` tokens into `prompt_toolkit` formatted text.
- If you have a `Pygments` style, then this needs to be converted as well. A `Pygments` style class can be converted in a `prompt_toolkit Style` with the `style_from_pygments_cls()` function (which used to be called `style_from_pygments`). A `Pygments` style dictionary can be converted using `style_from_pygments_dict()`.

Multiple styles can be merged together using `merge_styles()`.

## WordCompleter

`WordCompleter` was moved from `prompt_toolkit.contrib.completers.base.WordCompleter` to `prompt_toolkit.completion.word_completer.WordCompleter`.

## Asynchronous autocompletion

By default, `prompt_toolkit 2.0` completion is now synchronous. If you still want asynchronous auto completion (which is often good thing), then you have to wrap the completer in a `ThreadedCompleter`.

## Filters

We don't distinguish anymore between `CLIFilter` and `SimpleFilter`, because the application object is no longer passed around. This means that all filters are a `Filter` from now on.

All filters have been turned into functions. For instance, `IsDone` became `is_done` and `HasCompletions` became `has_completions`.

This was done because almost all classes were called without any arguments in the `__init__` causing additional braces everywhere. This means that `HasCompletions()` has to be replaced by `has_completions` (without parenthesis).

The few filters that took arguments as input, became functions, but still have to be called with the given arguments.

For new filters, it is recommended to use the `@Condition` decorator, rather than inheriting from `Filter`. For instance:

```
from prompt_toolkit.filters import Condition

@Condition
def my_filter():
    return True # Or False
```

## 3.3.2 Upgrading to prompt\_toolkit 3.0

There are two major changes in 3.0 to be aware of:

- First, prompt\_toolkit uses the asyncio event loop natively, rather than using its own implementations of event loops. This means that all coroutines are now asyncio coroutines, and all Futures are asyncio futures. Asynchronous generators became real asynchronous generators as well.
- Prompt\_toolkit uses type annotations (almost) everywhere. This should not break any code, but its very helpful in many ways.

There are some minor breaking changes:

- The dialogs API had to change (see below).

### Detecting the prompt\_toolkit version

Detecting whether version 3 is being used can be done as follows:

```
from prompt_toolkit import __version__ as ptk_version

PTK3 = ptk_version.startswith('3.')
```

### Fixing calls to `get_event_loop`

Every usage of `get_event_loop` has to be fixed. An easy way to do this is by changing the imports like this:

```
if PTK3:
    from asyncio import get_event_loop
else:
    from prompt_toolkit.eventloop import get_event_loop
```

Notice that for prompt\_toolkit 2.0, `get_event_loop` returns a `prompt_toolkit EventLoop` object. This is not an asyncio eventloop, but the API is similar.

There are some changes to the eventloop API:

version 2.0	version 3.0 (asyncio)
<code>loop.run_in_executor(callback)</code>	<code>loop.run_in_executor(None, callback)</code>
<code>loop.call_from_executor(callback)</code>	<code>loop.call_soon_threadsafe(callback)</code>

### Running on top of asyncio

For 2.0, you had tell prompt\_toolkit to run on top of the asyncio event loop. Now it's the default. So, you can simply remove the following two lines:

```
from prompt_toolkit.eventloop.defaults import use_asyncio_event_loop
use_asyncio_event_loop()
```

There is a few little breaking changes though. The following:

```
# For 2.0
result = await PromptSession().prompt('Say something: ', async_=True)
```

has to be changed into:

```
# For 3.0
result = await PromptSession().prompt_async('Say something: ')
```

Further, it's impossible to call the `prompt()` function within an asyncio application (within a coroutine), because it will try to run the event loop again. In that case, always use `prompt_async()`.

## Changes to the dialog functions

The original way of using dialog boxes looked like this:

```
from prompt_toolkit.shortcuts import input_dialog

result = input_dialog(title='...', text='...')
```

Now, the dialog functions return a `prompt_toolkit` Application object. You have to call either its `run` or `run_async` method to display the dialog. The `async_` parameter has been removed everywhere.

```
if PTK3:
    result = input_dialog(title='...', text='...').run()
else:
    result = input_dialog(title='...', text='...')

# Or

if PTK3:
    result = await input_dialog(title='...', text='...').run_async()
else:
    result = await input_dialog(title='...', text='...', async_=True)
```

## 3.4 Printing (and using) formatted text

`prompt_toolkit` ships with a `print_formatted_text()` function that's meant to be (as much as possible) compatible with the built-in `print` function, but on top of that, also supports colors and formatting.

On Linux systems, this will output VT100 escape sequences, while on Windows it will use Win32 API calls or VT100 sequences, depending on what is available.

---

**Note:** This page is also useful if you'd like to learn how to use formatting in other places, like in a prompt or a toolbar. Just like `print_formatted_text()` takes any kind of "formatted text" as input, prompts and toolbars also accept "formatted text".

---

### 3.4.1 Printing plain text

The `print` function can be imported as follows:

```
from prompt_toolkit import print_formatted_text

print_formatted_text('Hello world')
```

You can replace the built in `print` function as follows, if you want to.

```
from prompt_toolkit import print_formatted_text as print

print('Hello world')
```

---

**Note:** If you're using Python 2, make sure to add `from __future__ import print_function`. Otherwise, it will not be possible to import a function named `print`.

---

### 3.4.2 Formatted text

There are several ways to display colors:

- By creating an *HTML* object.
- By creating an *ANSI* object that contains ANSI escape sequences.
- By creating a list of `(style, text)` tuples.
- By creating a list of `(pygments.Token, text)` tuples, and wrapping it in *PygmentsTokens*.

An instance of any of these four kinds of objects is called “formatted text”. There are various places in prompt toolkit, where we accept not just plain text (as a string), but also formatted text.

#### HTML

*HTML* can be used to indicate that a string contains HTML-like formatting. It recognizes the basic tags for bold, italic and underline: `<b>`, `<i>` and `<u>`.

```
from prompt_toolkit import print_formatted_text, HTML

print_formatted_text(HTML('<b>This is bold</b>'))
print_formatted_text(HTML('<i>This is italic</i>'))
print_formatted_text(HTML('<u>This is underlined</u>'))
```

Further, it's possible to use tags for foreground colors:

```
# Colors from the ANSI palette.
print_formatted_text(HTML('<ansired>This is red</ansired>'))
print_formatted_text(HTML('<ansigreen>This is green</ansigreen>'))

# Named colors (256 color palette, or true color, depending on the output).
print_formatted_text(HTML('<skyblue>This is sky blue</skyblue>'))
print_formatted_text(HTML('<seagreen>This is sea green</seagreen>'))
print_formatted_text(HTML('<violet>This is violet</violet>'))
```

Both foreground and background colors can also be specified setting the *fg* and *bg* attributes of any HTML tag:

```
# Colors from the ANSI palette.
print_formatted_text(HTML('<aaa fg="ansiwhite" bg="ansigreen">White on green</aaa>'))
```

Underneath, all HTML tags are mapped to classes from a stylesheet, so you can assign a style for a custom tag.

```
from prompt_toolkit import print_formatted_text, HTML
from prompt_toolkit.styles import Style

style = Style.from_dict({
    'aaa': '#ff0066',
    'bbb': '#44ff00 italic',
})
```

(continues on next page)

(continued from previous page)

```
print_formatted_text(HTML('<aaa>Hello</aaa> <bbb>world</bbb>!'), style=style)
```

## ANSI

Some people like to use the VT100 ANSI escape sequences to generate output. Natively, this is however only supported on VT100 terminals, but `prompt_toolkit` can parse these, and map them to formatted text instances. This means that they will work on Windows as well. The `ANSI` class takes care of that.

```
from prompt_toolkit import print_formatted_text, ANSI

print_formatted_text(ANSI('\x1b[31mhello \x1b[32mworld'))
```

Keep in mind that even on a Linux VT100 terminal, the final output produced by `prompt_toolkit`, is not necessarily exactly the same. Depending on the color depth, it is possible that colors are mapped to different colors, and unknown tags will be removed.

## (style, text) tuples

Internally, both `HTML` and `ANSI` objects are mapped to a list of `(style, text)` tuples. It is however also possible to create such a list manually with `FormattedText` class. This is a little more verbose, but it's probably the most powerful way of expressing formatted text.

```
from prompt_toolkit import print_formatted_text
from prompt_toolkit.formatted_text import FormattedText

text = FormattedText([
    ('#ff0066', 'Hello'),
    ('', ' '),
    ('#44ff00 italic', 'World'),
])

print_formatted_text(text)
```

Similar to the `HTML` example, it is also possible to use class names, and separate the styling in a style sheet.

```
from prompt_toolkit import print_formatted_text
from prompt_toolkit.formatted_text import FormattedText
from prompt_toolkit.styles import Style

# The text.
text = FormattedText([
    ('class:aaa', 'Hello'),
    ('', ' '),
    ('class:bbb', 'World'),
])

# The style sheet.
style = Style.from_dict({
    'aaa': '#ff0066',
    'bbb': '#44ff00 italic',
})

print_formatted_text(text, style=style)
```

## Pygments (Token, text) tuples

When you have a list of Pygments (Token, text) tuples, then these can be printed by wrapping them in a `PygmentsTokens` object.

```
from pygments.token import Token
from prompt_toolkit import print_formatted_text
from prompt_toolkit.formatted_text import PygmentsTokens

text = [
    (Token.Keyword, 'print'),
    (Token.Punctuation, '('),
    (Token.Literal.String.Double, '"'),
    (Token.Literal.String.Double, 'hello'),
    (Token.Literal.String.Double, '"'),
    (Token.Punctuation, ')'),
    (Token.Text, '\n'),
]

print_formatted_text(PygmentsTokens(text))
```

Similarly, it is also possible to print the output of a Pygments lexer:

```
import pygments
from pygments.token import Token
from pygments.lexers.python import PythonLexer

from prompt_toolkit.formatted_text import PygmentsTokens
from prompt_toolkit import print_formatted_text

# Printing the output of a pygments lexer.
tokens = list(pygments.lex('print("Hello")', lexer=PythonLexer()))
print_formatted_text(PygmentsTokens(tokens))
```

Prompt\_toolkit ships with a default colorscheme which styles it just like Pygments would do, but if you'd like to change the colors, keep in mind that Pygments tokens map to classnames like this:

pygments.Token	prompt_toolkit classname
<ul style="list-style-type: none"> <li>• <code>Token.Keyword</code></li> <li>• <code>Token.Punctuation</code></li> <li>• <code>Token.Literal.String.Double</code></li> <li>• <code>Token.Text</code></li> <li>• <code>Token</code></li> </ul>	<ul style="list-style-type: none"> <li>• <code>"class:pygments.keyword"</code></li> <li>• <code>"class:pygments.punctuation"</code></li> <li>• <code>"class:pygments.literal.string.double"</code></li> <li>• <code>"class:pygments.text"</code></li> <li>• <code>"class:pygments"</code></li> </ul>

A classname like `pygments.literal.string.double` is actually decomposed in the following four classnames: `pygments`, `pygments.literal`, `pygments.literal.string` and `pygments.literal.string.double`. The final style is computed by combining the style for these four classnames. So, changing the style from these Pygments tokens can be done as follows:

```
from prompt_toolkit.styles import Style

style = Style.from_dict({
    'pygments.keyword': 'underline',
```

(continues on next page)

(continued from previous page)

```
'pygments.literal.string': 'bg:#00ff00 #ffffff',
})
print_formatted_text(PygmentsTokens(tokens), style=style)
```

## to\_formatted\_text

A useful function to know about is `to_formatted_text()`. This ensures that the given input is valid formatted text. While doing so, an additional style can be applied as well.

```
from prompt_toolkit.formatted_text import to_formatted_text, HTML
from prompt_toolkit import print_formatted_text

html = HTML('<aaa>Hello</aaa> <bbb>world</bbb>!')
text = to_formatted_text(html, style='class:my_html bg:#00ff00 italic')

print_formatted_text(text)
```

## 3.5 Asking for input (prompts)

This page is about building prompts. Pieces of code that we can embed in a program for asking the user for input. Even if you want to use *prompt\_toolkit* for building full screen terminal applications, it is probably still a good idea to read this first, before heading to the *building full screen applications* page.

In this page, we will cover autocompletion, syntax highlighting, key bindings, and so on.

### 3.5.1 Hello world

The following snippet is the most simple example, it uses the `prompt()` function to ask the user for input and returns the text. Just like `(raw_)input`.

```
from prompt_toolkit import prompt

text = prompt('Give me some input: ')
print('You said: %s' % text)
```

```

prompt_toolkit — -bash — 43x5
$ python prompt.py
Give me some input: Hi there!
You said: Hi there!
$ █

```

What we get here is a simple prompt that supports the Emacs key bindings like `readline`, but further nothing special. However, `prompt()` has a lot of configuration options. In the following sections, we will discover all these parameters.

### 3.5.2 The `PromptSession` object

Instead of calling the `prompt()` function, it's also possible to create a `PromptSession` instance followed by calling its `prompt()` method for every input call. This creates a kind of an input session.

```

from prompt_toolkit import PromptSession

# Create prompt object.
session = PromptSession()

# Do multiple input calls.
text1 = session.prompt()
text2 = session.prompt()

```

This has mainly two advantages:

- The input history will be kept between consecutive `prompt()` calls.
- The `PromptSession()` instance and its `prompt()` method take about the same arguments, like all the options described below (highlighting, completion, etc...). So if you want to ask for multiple inputs, but each input call needs about the same arguments, they can be passed to the `PromptSession()` instance as well, and they can be overridden by passing values to the `prompt()` method.

### 3.5.3 Syntax highlighting

Adding syntax highlighting is as simple as adding a lexer. All of the `Pygments` lexers can be used after wrapping them in a `PygmentsLexer`. It is also possible to create a custom lexer by implementing the `Lexer` abstract base class.

```

from pygments.lexers.html import HtmlLexer
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.lexers import PygmentsLexer

```

(continues on next page)

(continued from previous page)

```
text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer))
print('You said: %s' % text)
```

```
prompt_toolkit -- -bash -- 43x5
$ python html-input.py
Enter HTML: <p class="hello">world</p>
You said: <p class="hello">world</p>
$
```

The default Pygments colorscheme is included as part of the default style in `prompt_toolkit`. If you want to use another Pygments style along with the lexer, you can do the following:

```
from pygments.lexers.html import HtmlLexer
from pygments.styles import get_style_by_name
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.lexers import PygmentsLexer
from prompt_toolkit.styles.pygments import style_from_pygments_cls

style = style_from_pygments_cls(get_style_by_name('monokai'))
text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer), style=style,
              include_default_pygments_style=False)
print('You said: %s' % text)
```

We pass `include_default_pygments_style=False`, because otherwise, both styles will be merged, possibly giving slightly different colors in the outcome for cases where where our custom Pygments style doesn't specify a color.

### 3.5.4 Colors

The colors for syntax highlighting are defined by a `Style` instance. By default, a neutral built-in style is used, but any style instance can be passed to the `prompt()` function. A simple way to create a style, is by using the `from_dict()` function:

```
from pygments.lexers.html import HtmlLexer
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.styles import Style
from prompt_toolkit.lexers import PygmentsLexer

our_style = Style.from_dict({
    'pygments.comment': '#888888 bold',
    'pygments.keyword': '#ff88ff bold',
})
```

(continues on next page)

(continued from previous page)

```
text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer),
             style=our_style)
```

The style dictionary is very similar to the Pygments styles dictionary, with a few differences:

- The *roman*, *sans*, *mono* and *border* options are ignored.
- The style has a few additions: `blink`, `noblink`, `reverse` and `noreverse`.
- Colors can be in the `#ff0000` format, but they can be one of the built-in ANSI color names as well. In that case, they map directly to the 16 color palette of the terminal.

*Read more about styling.*

### Using a Pygments style

All Pygments style classes can be used as well, when they are wrapped through `style_from_pygments_cls()`.

Suppose we'd like to use a Pygments style, for instance `pygments.styles.tango.TangoStyle`, that is possible like this:

```
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.styles import style_from_pygments_cls
from prompt_toolkit.lexers import PygmentsLexer
from pygments.styles.tango import TangoStyle
from pygments.lexers.html import HtmlLexer

tango_style = style_from_pygments_cls (TangoStyle)

text = prompt ('Enter HTML: ',
              lexer=PygmentsLexer(HtmlLexer),
              style=tango_style)
```

Creating a custom style could be done like this:

```
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.styles import Style, style_from_pygments_cls, merge_styles
from prompt_toolkit.lexers import PygmentsLexer

from pygments.styles.tango import TangoStyle
from pygments.lexers.html import HtmlLexer

our_style = merge_styles([
    style_from_pygments_cls(TangoStyle),
    Style.from_dict({
        'pygments.comment': '#888888 bold',
        'pygments.keyword': '#ff88ff bold',
    })
])

text = prompt('Enter HTML: ', lexer=PygmentsLexer(HtmlLexer),
             style=our_style)
```

## Coloring the prompt itself

It is possible to add some colors to the prompt itself. For this, we need to build some *formatted text*. One way of doing this is by creating a list of style/text tuples. In the following example, we use class names to refer to the style.


```
from prompt_toolkit.shortcuts import prompt
from prompt_toolkit.styles import Style

style = Style.from_dict({
    # User input (default text).
    '':          '#ff0066',

    # Prompt.
    'username':  '#884444',
    'at':        '#00aa00',
    'colon':     '#0000aa',
    'pound':     '#00aa00',
    'host':      '#00ffff bg:#444400',
    'path':      'ansicyan underline',
})

message = [
    ('class:username', 'john'),
    ('class:at',       '@'),
    ('class:host',     'localhost'),
    ('class:colon',    ':'),
    ('class:path',     '/user/john'),
    ('class:pound',   '# '),
]

text = prompt(message, style=style)
```

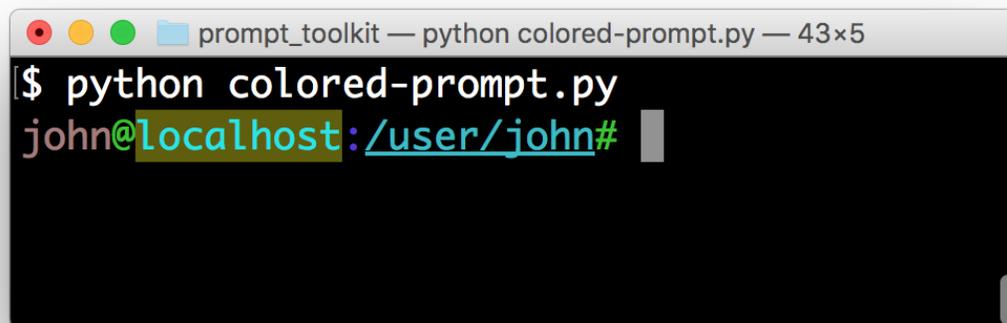

The *message* can be any kind of formatted text, as discussed [here](#). It can also be a callable that returns some formatted text.

By default, colors are taken from the 256 color palette. If you want to have 24bit true color, this is possible by adding the `color_depth=ColorDepth.TRUE_COLOR` option to the `prompt()` function.

```
from prompt_toolkit.output import ColorDepth

text = prompt(message, style=style, color_depth=ColorDepth.TRUE_COLOR)
```


### 3.5.5 Autocompletion

Autocompletion can be added by passing a `completer` parameter. This should be an instance of the *Completer* abstract base class. *WordCompleter* is an example of a completer that implements that interface.

```
from prompt_toolkit import prompt
from prompt_toolkit.completion import WordCompleter

html_completer = WordCompleter(['<html>', '<body>', '<head>', '<title>'])
text = prompt('Enter HTML: ', completer=html_completer)
print('You said: %s' % text)
```

*WordCompleter* is a simple completer that completes the last word before the cursor with any of the given words.

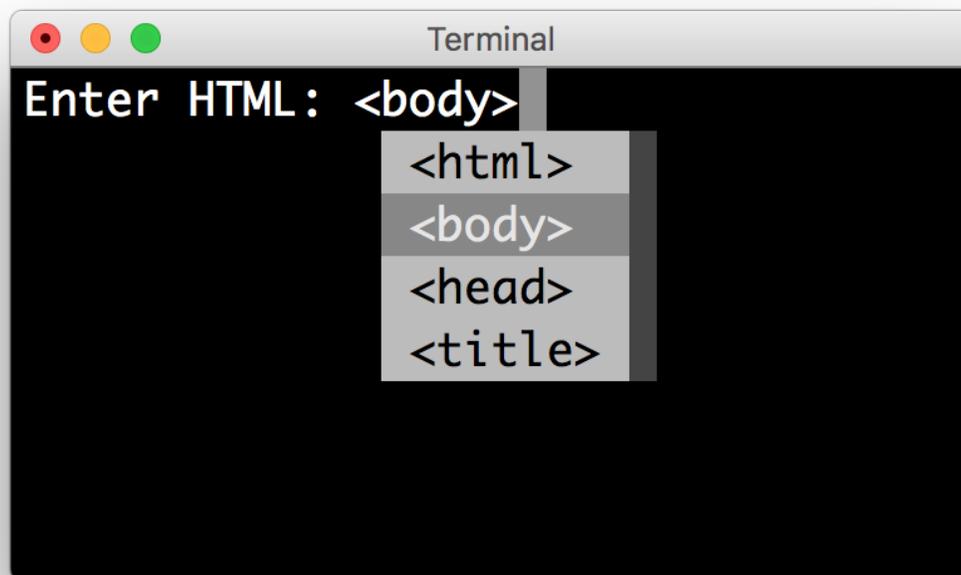

---

**Note:** Note that in `prompt_toolkit 2.0`, the auto completion became synchronous. This means that if it takes a long time to compute the completions, that this will block the event loop and the input processing.

For heavy completion algorithms, it is recommended to wrap the completer in a *ThreadedCompleter* in order to run it in a background thread.

---

## Nested completion

Sometimes you have a command line interface where the completion depends on the previous words from the input. Examples are the CLIs from routers and switches. A simple *WordCompleter* is not enough in that case. We want to be able to define completions at multiple hierarchical levels. *NestedCompleter* solves this issue:

```
from prompt_toolkit import prompt
from prompt_toolkit.completion import NestedCompleter

completer = NestedCompleter.from_nested_dict({
    'show': {
        'version': None,
        'clock': None,
        'ip': {
            'interface': {'brief'}
        }
    },
    'exit': None,
})

text = prompt('# ', completer=completer)
print('You said: %s' % text)
```

Whenever there is a `None` value in the dictionary, it means that there is no further nested completion at that point. When all values of a dictionary would be `None`, it can also be replaced with a set.

## A custom completer

For more complex examples, it makes sense to create a custom completer. For instance:

```
from prompt_toolkit import prompt
from prompt_toolkit.completion import Completer, Completion

class MyCustomCompleter(Completer):
    def get_completions(self, document, complete_event):
        yield Completion('completion', start_position=0)

text = prompt('> ', completer=MyCustomCompleter())
```

A *Completer* class has to implement a generator named *get\_completions()* that takes a *Document* and yields the current *Completion* instances. Each completion contains a portion of text, and a position.

The position is used for fixing text before the cursor. Pressing the tab key could for instance turn parts of the input from lowercase to uppercase. This makes sense for a case insensitive completer. Or in case of a fuzzy completion, it could fix typos. When `start_position` is something negative, this amount of characters will be deleted and replaced.

## Styling individual completions

Each completion can provide a custom style, which is used when it is rendered in the completion menu or toolbar. This is possible by passing a style to each *Completion* instance.

```
from prompt_toolkit.completion import Completer, Completion

class MyCustomCompleter(Completer):
```

(continues on next page)


(continued from previous page)

```
def get_completions(self, document, complete_event):
    # Display this completion, black on yellow.
    yield Completion('completion1', start_position=0,
                    style='bg:ansiyellow fg:ansiblack')

    # Underline completion.
    yield Completion('completion2', start_position=0,
                    style='underline')

    # Specify class name, which will be looked up in the style sheet.
    yield Completion('completion3', start_position=0,
                    style='class:special-completion')
```

The “colorful-prompts.py” example uses completion styling:

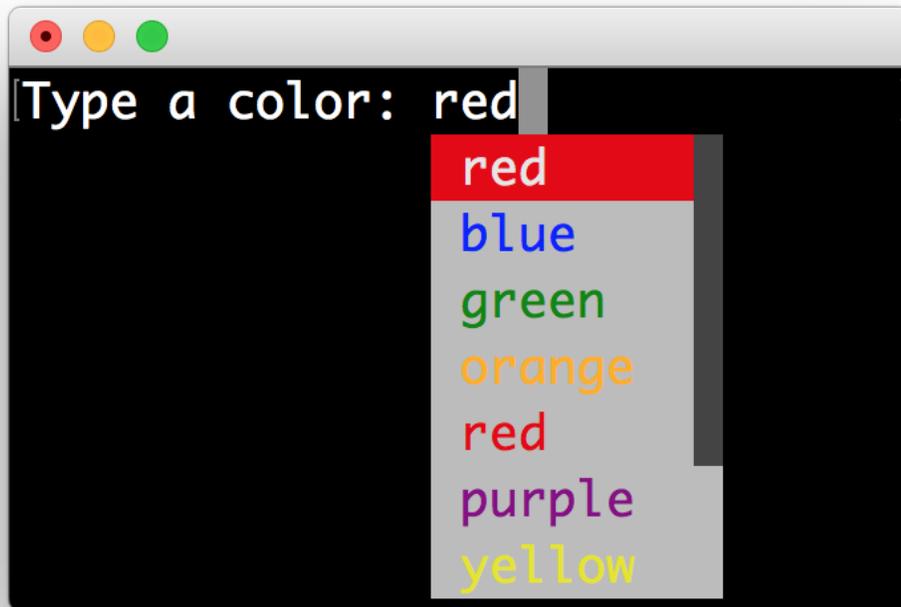

Finally, it is possible to pass *formatted text* for the `display` attribute of a `Completion`. This provides all the freedom you need to display the text in any possible way. It can also be combined with the `style` attribute. For instance:

```
from prompt_toolkit.completion import Completer, Completion
from prompt_toolkit.formatted_text import HTML

class MyCustomCompleter(Completer):
    def get_completions(self, document, complete_event):
        yield Completion(
```

(continues on next page)

(continued from previous page)

```
'completion1', start_position=0,
display=HTML('<b>completion</b><ansired>1</ansired>'),
style='bg:ansiyellow')
```

## Fuzzy completion

If one possible completion is “django\_migrations”, a fuzzy completer would allow you to get this by typing “djm” only, a subset of characters for this string.

Prompt\_toolkit ships with a *FuzzyCompleter* and *FuzzyWordCompleter* class. These provide the means for doing this kind of “fuzzy completion”. The first one can take any completer instance and wrap it so that it becomes a fuzzy completer. The second one behaves like a *WordCompleter* wrapped into a *FuzzyCompleter*.

## Complete while typing

Autocompletions can be generated automatically while typing or when the user presses the tab key. This can be configured with the `complete_while_typing` option:

```
text = prompt('Enter HTML: ', completer=my_completer,
              complete_while_typing=True)
```

Notice that this setting is incompatible with the `enable_history_search` option. The reason for this is that the up and down key bindings would conflict otherwise. So, make sure to disable history search for this.

## Asynchronous completion

When generating the completions takes a lot of time, it’s better to do this in a background thread. This is possible by wrapping the completer in a *ThreadedCompleter*, but also by passing the `complete_in_thread=True` argument.

```
text = prompt('> ', completer=MyCustomCompleter(), complete_in_thread=True)
```

## 3.5.6 Input validation

A prompt can have a validator attached. This is some code that will check whether the given input is acceptable and it will only return it if that’s the case. Otherwise it will show an error message and move the cursor to a given position.

A validator should implement the *Validator* abstract base class. This requires only one method, named `validate` that takes a *Document* as input and raises *ValidationError* when the validation fails.

```
from prompt_toolkit.validation import Validator, ValidationError
from prompt_toolkit import prompt

class NumberValidator(Validator):
    def validate(self, document):
        text = document.text

        if text and not text.isdigit():
            i = 0

            # Get index of first non numeric character.
            # We want to move the cursor here.
```

(continues on next page)

(continued from previous page)

```

        for i, c in enumerate(text):
            if not c.isdigit():
                break

        raise ValidationError(message='This input contains non-numeric characters
↪',
                               cursor_position=i)

number = int(prompt('Give a number: ', validator=NumberValidator()))
print('You said: %i' % number)

```



By default, the input is validated in real-time while the user is typing, but `prompt_toolkit` can also validate after the user presses the enter key:

```

prompt('Give a number: ', validator=NumberValidator(),
       validate_while_typing=False)

```

If the input validation contains some heavy CPU intensive code, but you don't want to block the event loop, then it's recommended to wrap the validator class in a `ThreadedValidator`.

### Validator from a callable

Instead of implementing the `Validator` abstract base class, it is also possible to start from a simple function and use the `from_callable()` classmethod. This is easier and sufficient for probably 90% of the validators. It looks as follows:

```

from prompt_toolkit.validation import Validator
from prompt_toolkit import prompt

def is_number(text):
    return text.isdigit()

validator = Validator.from_callable(
    is_number,
    error_message='This input contains non-numeric characters',
    move_cursor_to_end=True)

```

(continues on next page)

(continued from previous page)

```
number = int(prompt('Give a number: ', validator=validator))
print('You said: %i' % number)
```

We define a function that takes a string, and tells whether it's valid input or not by returning a boolean. `from_callable()` turns that into a `Validator` instance. Notice that setting the cursor position is not possible this way.

### 3.5.7 History

A `History` object keeps track of all the previously entered strings, so that the up-arrow can reveal previously entered items.

The recommended way is to use a `PromptSession`, which uses an `InMemoryHistory` for the entire session by default. The following example has a history out of the box:

```
from prompt_toolkit import PromptSession

session = PromptSession()

while True:
    session.prompt()
```

To persist a history to disk, use a `FileHistory` instead of the default `InMemoryHistory`. This history object can be passed either to a `PromptSession` or to the `prompt()` function. For instance:

```
from prompt_toolkit import PromptSession
from prompt_toolkit.history import FileHistory

session = PromptSession(history=FileHistory('~/.myhistory'))

while True:
    session.prompt()
```

### 3.5.8 Auto suggestion

Auto suggestion is a way to propose some input completions to the user like the `fish shell`.

Usually, the input is compared to the history and when there is another entry starting with the given text, the completion will be shown as gray text behind the current input. Pressing the right arrow `→` or `c-e` will insert this suggestion, `alt-f` will insert the first word of the suggestion.

---

**Note:** When suggestions are based on the history, don't forget to share one `History` object between consecutive `prompt()` calls. Using a `PromptSession` does this for you.

---

Example:


```
from prompt_toolkit import PromptSession
from prompt_toolkit.history import InMemoryHistory
from prompt_toolkit.auto_suggest import AutoSuggestFromHistory

session = PromptSession()
```

(continues on next page)

(continued from previous page)

```
while True:
    text = session.prompt('> ', auto_suggest=AutoSuggestFromHistory())
    print('You said: %s' % text)
```

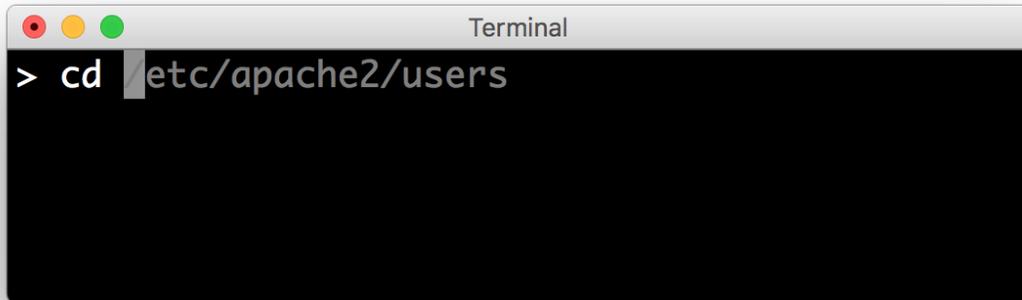

A suggestion does not have to come from the history. Any implementation of the *AutoSuggest* abstract base class can be passed as an argument.

### 3.5.9 Adding a bottom toolbar

Adding a bottom toolbar is as easy as passing a `bottom_toolbar` argument to `prompt()`. This argument can be either plain text, *formatted text* or a callable that returns plain or formatted text.


When a function is given, it will be called every time the prompt is rendered, so the bottom toolbar can be used to display dynamic information.

The toolbar is always erased when the prompt returns. Here we have an example of a callable that returns an *HTML* object. By default, the toolbar has the **reversed style**, which is why we are setting the background instead of the foreground.

```
from prompt_toolkit import prompt
from prompt_toolkit.formatted_text import HTML

def bottom_toolbar():
    return HTML('This is a <b><style bg="ansired">Toolbar</style></b>!')
```

```
text = prompt('> ', bottom_toolbar=bottom_toolbar)
print('You said: %s' % text)
```

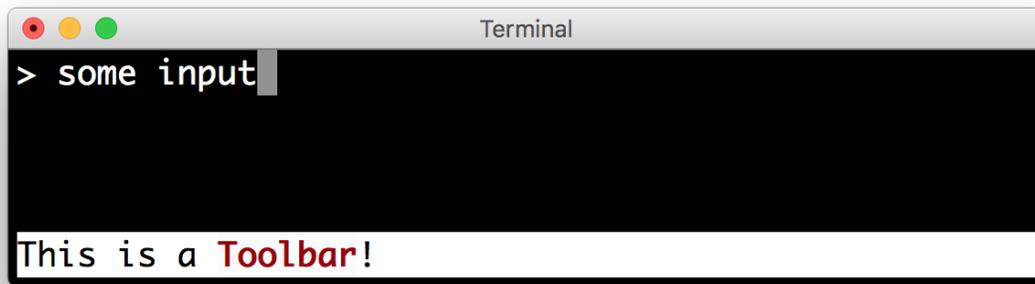

Similar, we could use a list of style/text tuples.

```
from prompt_toolkit import prompt
from prompt_toolkit.styles import Style

def bottom_toolbar():
    return [('class:bottom-toolbar', ' This is a toolbar. ')]

style = Style.from_dict({
    'bottom-toolbar': '#ffffff bg:#333333',
})

text = prompt('> ', bottom_toolbar=bottom_toolbar, style=style)
print('You said: %s' % text)
```

The default class name is `bottom-toolbar` and that will also be used to fill the background of the toolbar.

### 3.5.10 Adding a right prompt

The `prompt()` function has out of the box support for right prompts as well. People familiar to ZSH could recognise this as the `R_PROMPT` option.


So, similar to adding a bottom toolbar, we can pass an `rprompt` argument. This can be either plain text, *formatted text* or a callable which returns either.

```
from prompt_toolkit import prompt
from prompt_toolkit.styles import Style

example_style = Style.from_dict({
    'rprompt': 'bg:#ff0066 #ffffff',
})

def get_rprompt():
    return '<rprompt>'

answer = prompt('> ', rprompt=get_rprompt, style=example_style)
```

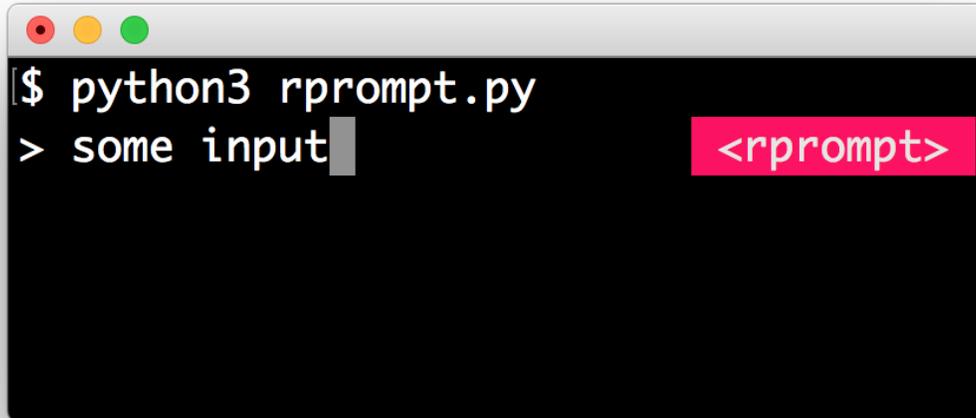

The `get_rprompt` function can return any kind of formatted text such as *HTML*. It is also possible to pass text directly to the `rprompt` argument of the `prompt()` function. It does not have to be a callable.

### 3.5.11 Vi input mode

Prompt-toolkit supports both Emacs and Vi key bindings, similar to Readline. The `prompt()` function will use Emacs bindings by default. This is done because on most operating systems, also the Bash shell uses Emacs bindings by default, and that is more intuitive. If however, Vi binding are required, just pass `vi_mode=True`.

```
from prompt_toolkit import prompt

prompt('> ', vi_mode=True)
```

### 3.5.12 Adding custom key bindings

By default, every prompt already has a set of key bindings which implements the usual Vi or Emacs behaviour. We can extend this by passing another *KeyBindings* instance to the `key_bindings` argument of the `prompt()` function or the *PromptSession* class.

An example of a prompt that prints 'hello world' when Control-T is pressed.

```
from prompt_toolkit import prompt
from prompt_toolkit.application import run_in_terminal
from prompt_toolkit.key_binding import KeyBindings

bindings = KeyBindings()

@bindings.add('c-t')
def _(event):
    " Say 'hello' when `c-t` is pressed. "
    def print_hello():
```

(continues on next page)

(continued from previous page)

```

        print('hello world')
    run_in_terminal(print_hello)

@bindings.add('c-x')
def _(event):
    " Exit when `c-x` is pressed. "
    event.app.exit()

text = prompt('> ', key_bindings=bindings)
print('You said: %s' % text)

```

Note that we use `run_in_terminal()` for the first key binding. This ensures that the output of the print-statement and the prompt don't mix up. If the key bindings doesn't print anything, then it can be handled directly without nesting functions.

### Enable key bindings according to a condition

Often, some key bindings can be enabled or disabled according to a certain condition. For instance, the Emacs and Vi bindings will never be active at the same time, but it is possible to switch between Emacs and Vi bindings at run time.

In order to enable a key binding according to a certain condition, we have to pass it a *Filter*, usually a *Condition* instance. (*Read more about filters.*)

```

from prompt_toolkit import prompt
from prompt_toolkit.filters import Condition
from prompt_toolkit.key_binding import KeyBindings

bindings = KeyBindings()

@Condition
def is_active():
    " Only activate key binding on the second half of each minute. "
    return datetime.datetime.now().second > 30

@bindings.add('c-t', filter=is_active)
def _(event):
    # ...
    pass

prompt('> ', key_bindings=bindings)

```

### Dynamically switch between Emacs and Vi mode

The *Application* has an `editing_mode` attribute. We can change the key bindings by changing this attribute from `EditingMode.VI` to `EditingMode.EMACS`.

```

from prompt_toolkit import prompt
from prompt_toolkit.application.current import get_app
from prompt_toolkit.enums import EditingMode
from prompt_toolkit.key_binding import KeyBindings

def run():
    # Create a set of key bindings.
    bindings = KeyBindings()

```

(continues on next page)

(continued from previous page)

```

# Add an additional key binding for toggling this flag.
@bindings.add('f4')
def _(event):
    " Toggle between Emacs and Vi mode. "
    app = event.app

    if app.editing_mode == EditingMode.VI:
        app.editing_mode = EditingMode.EMACS
    else:
        app.editing_mode = EditingMode.VI

# Add a toolbar at the bottom to display the current input mode.
def bottom_toolbar():
    " Display the current input mode. "
    text = 'Vi' if get_app().editing_mode == EditingMode.VI else 'Emacs'
    return [
        ('class:toolbar', ' [F4] %s ' % text)
    ]

prompt('> ', key_bindings=bindings, bottom_toolbar=bottom_toolbar)

run()

```

*Read more about key bindings ...*

## Using control-space for completion

An popular short cut that people sometimes use it to use control-space for opening the autocompletion menu instead of the tab key. This can be done with the following key binding.

```

kb = KeyBindings()

@kb.add('c-space')
def _(event):
    " Initialize autocompletion, or select the next completion. "
    buff = event.app.current_buffer
    if buff.complete_state:
        buff.complete_next()
    else:
        buff.start_completion(select_first=False)

```

### 3.5.13 Other prompt options

#### Multiline input

Reading multiline input is as easy as passing the `multiline=True` parameter.

```

from prompt_toolkit import prompt

prompt('> ', multiline=True)

```


A side effect of this is that the enter key will now insert a newline instead of accepting and returning the input. The user will now have to press `Meta+Enter` in order to accept the input. (Or `Escape` followed by `Enter`.)

It is possible to specify a continuation prompt. This works by passing a `prompt_continuation` callable to `prompt()`. This function is supposed to return *formatted text*, or a list of `(style, text)` tuples. The width of the returned text should not exceed the given width. (The width of the prompt margin is defined by the `prompt`.)

```
from prompt_toolkit import prompt

def prompt_continuation(width, line_number, is_soft_wrap):
    return '.' * width
    # Or: return [(' ', '.' * width)]

prompt('multiline input> ', multiline=True,
       prompt_continuation=prompt_continuation)
```

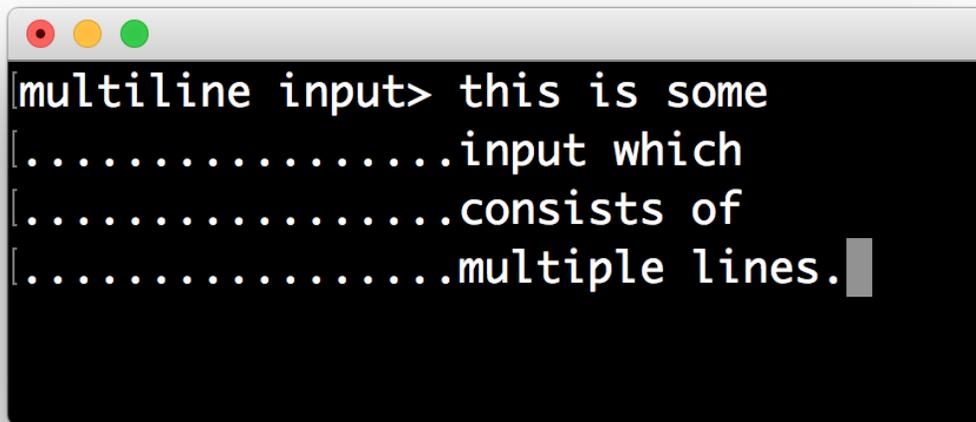

### Passing a default

A default value can be given:

```
from prompt_toolkit import prompt
import getpass

prompt('What is your name: ', default='%s' % getpass.getuser())
```

### Mouse support

There is limited mouse support for positioning the cursor, for scrolling (in case of large multiline inputs) and for clicking in the autocomplete menu.

Enabling can be done by passing the `mouse_support=True` option.

```
from prompt_toolkit import prompt

prompt('What is your name: ', mouse_support=True)
```

## Line wrapping

Line wrapping is enabled by default. This is what most people are used to and this is what GNU Readline does. When it is disabled, the input string will scroll horizontally.

```
from prompt_toolkit import prompt

prompt('What is your name: ', wrap_lines=False)
```

## Password input

When the `is_password=True` flag has been given, the input is replaced by asterisks (`*` characters).

```
from prompt_toolkit import prompt

prompt('Enter password: ', is_password=True)
```

### 3.5.14 Cursor shapes

Many terminals support displaying different types of cursor shapes. The most common are block, beam or underscore. Either blinking or not. It is possible to decide which cursor to display while asking for input, or in case of Vi input mode, have a modal prompt for which its cursor shape changes according to the input mode.

```
from prompt_toolkit import prompt
from prompt_toolkit.cursor_shapes import CursorShape, ModalCursorShapeConfig

# Several possible values for the `cursor_shape_config` parameter:
prompt('>', cursor=CursorShape.BLOCK)
prompt('>', cursor=CursorShape.UNDERLINE)
prompt('>', cursor=CursorShape.BEAM)
prompt('>', cursor=CursorShape.BLINKING_BLOCK)
prompt('>', cursor=CursorShape.BLINKING_UNDERLINE)
prompt('>', cursor=CursorShape.BLINKING_BEAM)
prompt('>', cursor=ModalCursorShapeConfig())
```

### 3.5.15 Prompt in an *asyncio* application

---

**Note:** New in `prompt_toolkit 3.0`. (In `prompt_toolkit 2.0` this was possible using a work-around).

---

For `asyncio` applications, it's very important to never block the eventloop. However, `prompt()` is blocking, and calling this would freeze the whole application. `Asyncio` actually won't even allow us to run that function within a coroutine.

The answer is to call `prompt_async()` instead of `prompt()`. The `async` variation returns a coroutine and is awaitable.

```
from prompt_toolkit import PromptSession
from prompt_toolkit.patch_stdout import patch_stdout

async def my_coroutine():
    session = PromptSession()
```

(continues on next page)

(continued from previous page)

```
while True:
    with patch_stdout():
        result = await session.prompt_async('Say something: ')
        print('You said: %s' % result)
```

The `patch_stdout()` context manager is optional, but it's recommended, because other coroutines could print to stdout. This ensures that other output won't destroy the prompt.

### 3.5.16 Reading keys from stdin, one key at a time, but without a prompt

Suppose that you want to use `prompt_toolkit` to read the keys from stdin, one key at a time, but not render a prompt to the output, that is also possible:

```
import asyncio

from prompt_toolkit.input import create_input
from prompt_toolkit.keys import Keys

async def main() -> None:
    done = asyncio.Event()
    input = create_input()

    def keys_ready():
        for key_press in input.read_keys():
            print(key_press)

            if key_press.key == Keys.ControlC:
                done.set()

    with input.raw_mode():
        with input.attach(keys_ready):
            await done.wait()

if __name__ == "__main__":
    asyncio.run(main())
```

The above snippet will print the `KeyPress` object whenever a key is pressed. This is also cross platform, and should work on Windows.

## 3.6 Dialogs

`Prompt_toolkit` ships with a high level API for displaying dialogs, similar to the `Whiptail` program, but in pure Python.

### 3.6.1 Message box


Use the `message_dialog()` function to display a simple message box. For instance:

```
from prompt_toolkit.shortcuts import message_dialog
```

(continues on next page)

(continued from previous page)


```
message_dialog(  
    title='Example dialog window',  
    text='Do you want to continue?\nPress ENTER to quit.').run()
```

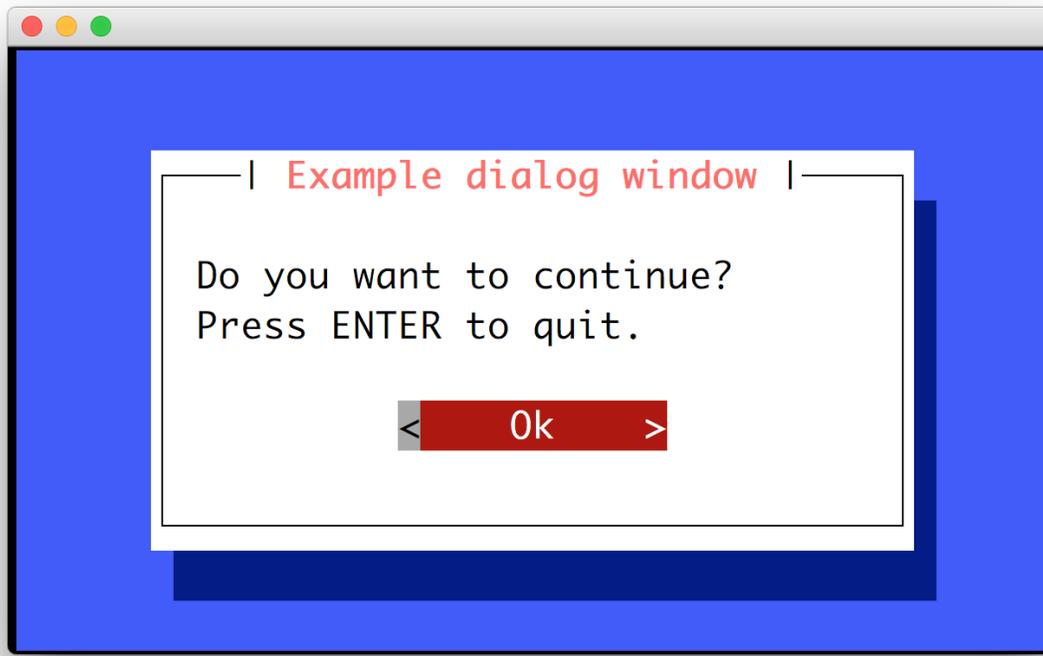

### 3.6.2 Input box

The `input_dialog()` function can display an input box. It will return the user input as a string.

```
from prompt_toolkit.shortcuts import input_dialog  
  
text = input_dialog(  
    title='Input dialog example',  
    text='Please type your name:').run()
```

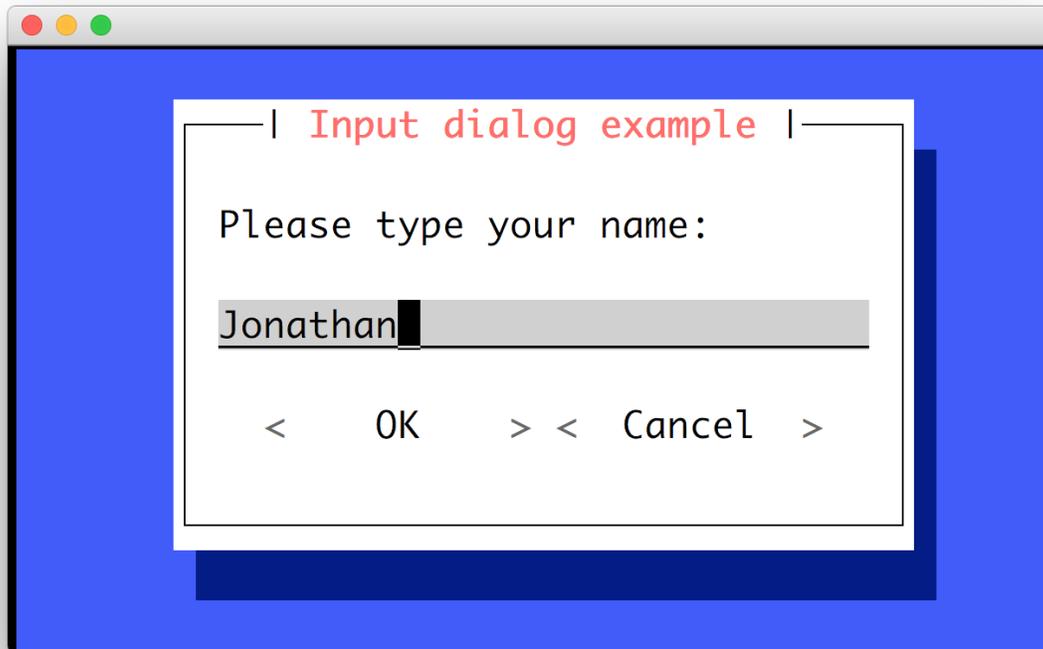


The `password=True` option can be passed to the `input_dialog()` function to turn this into a password input box.

### 3.6.3 Yes/No confirmation dialog

The `yes_no_dialog()` function displays a yes/no confirmation dialog. It will return a boolean according to the selection.

```
from prompt_toolkit.shortcuts import yes_no_dialog

result = yes_no_dialog(
    title='Yes/No dialog example',
    text='Do you want to confirm?').run()
```

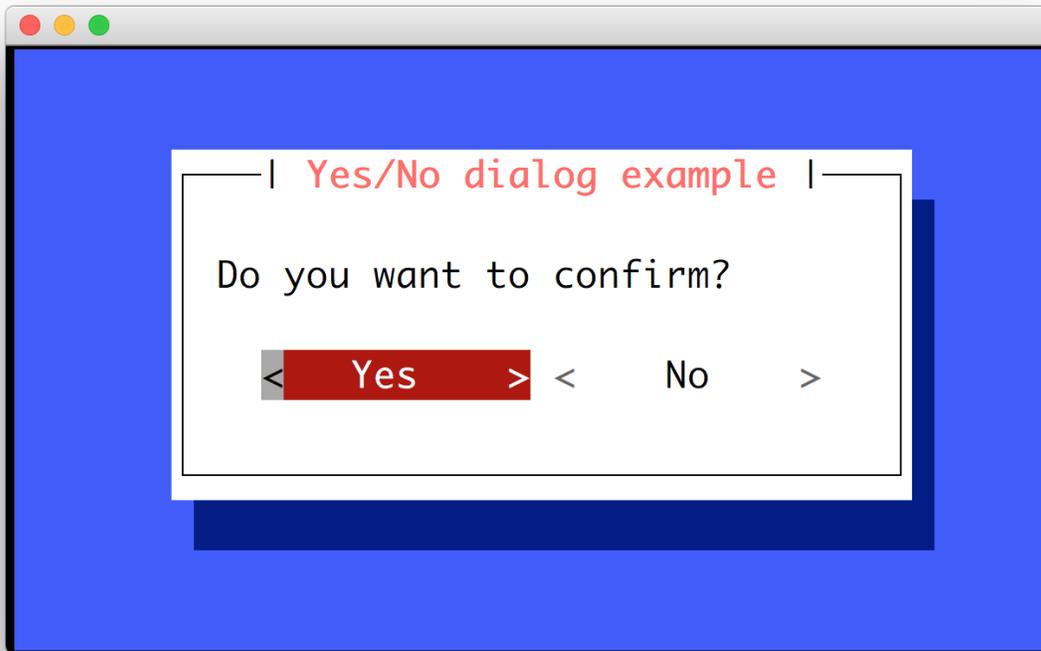


### 3.6.4 Button dialog

The `button_dialog()` function displays a dialog with choices offered as buttons. Buttons are indicated as a list of tuples, each providing the label (first) and return value if clicked (second).

```
from prompt_toolkit.shortcuts import button_dialog

result = button_dialog(
    title='Button dialog example',
    text='Do you want to confirm?',
    buttons=[
        ('Yes', True),
        ('No', False),
        ('Maybe...', None)
    ],
).run()
```

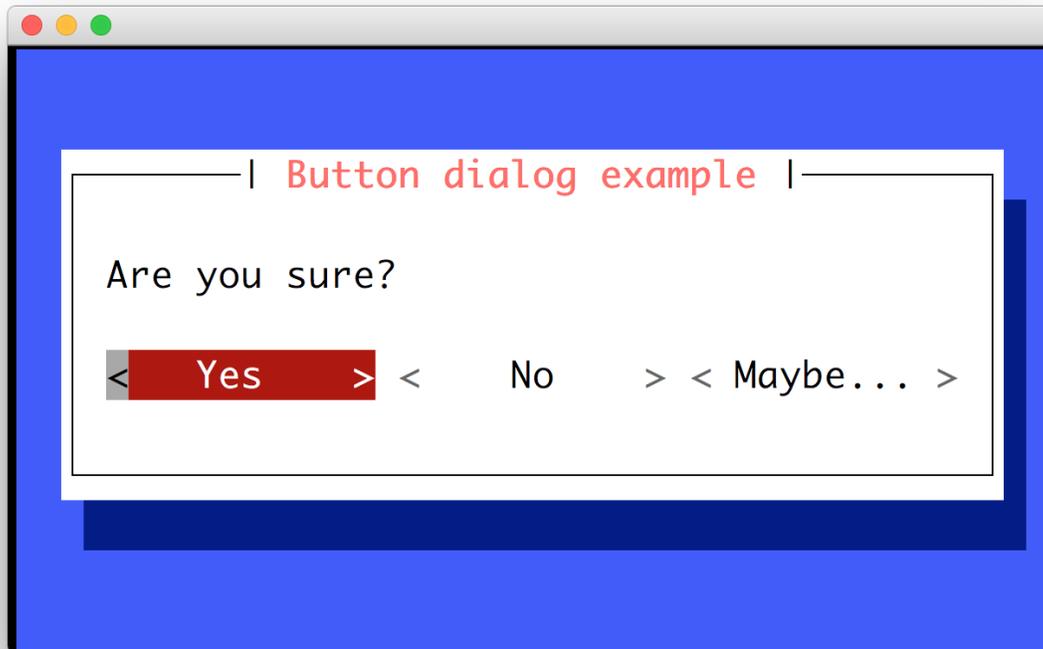

### 3.6.5 Radio list dialog

The `radiolist_dialog()` function displays a dialog with choices offered as a radio list. The values are provided as a list of tuples, each providing the return value (first element) and the displayed value (second element).

```
from prompt_toolkit.shortcuts import radiolist_dialog

result = radiolist_dialog(
    title="RadioList dialog",
    text="Which breakfast would you like ?",
    values=[
        ("breakfast1", "Eggs and beacon"),
        ("breakfast2", "French breakfast"),
        ("breakfast3", "Equestrian breakfast")
    ]
).run()
```

### 3.6.6 Checkbox list dialog

The `checkboxlist_dialog()` has the same usage and purpose than the Radiolist dialog, but allows several values to be selected and therefore returned.

```
from prompt_toolkit.shortcuts import checkboxlist_dialog

results_array = checkboxlist_dialog(
```

(continues on next page)

(continued from previous page)

```
title="CheckboxList dialog",
text="What would you like in your breakfast ?",
values=[
    ("eggs", "Eggs"),
    ("bacon", "Bacon"),
    ("croissants", "20 Croissants"),
    ("daily", "The breakfast of the day")
]
).run()
```

### 3.6.7 Styling of dialogs

A custom *Style* instance can be passed to all dialogs to override the default style. Also, text can be styled by passing an *HTML* object.

```
from prompt_toolkit.formatted_text import HTML
from prompt_toolkit.shortcuts import message_dialog
from prompt_toolkit.styles import Style

example_style = Style.from_dict({
    'dialog':          'bg:#88ff88',
    'dialog frame.label': 'bg:#ffffff #000000',
    'dialog.body':     'bg:#000000 #00ff00',
    'dialog shadow':   'bg:#00aa00',
})

message_dialog(
    title=HTML('<style bg="blue" fg="white">Styled</style> '
              '<style fg="ansired">dialog</style> window'),
    text='Do you want to continue?\nPress ENTER to quit.',
    style=example_style).run()
```



### 3.6.8 Styling reference sheet

In reality, the shortcut commands presented above build a full-screen frame by using a list of components. The two tables below allow you to get the classnames available for each shortcut, therefore you will be able to provide a custom style for every element that is displayed, using the method provided above.

---

**Note:** All the shortcuts use the `Dialog` component, therefore it isn't specified explicitly below.

---

Shortcut	Components used
yes_no_dialog	<ul style="list-style-type: none"><li>• Label</li><li>• Button (x2)</li></ul>
button_dialog	<ul style="list-style-type: none"><li>• Label</li><li>• Button</li></ul>
input_dialog	<ul style="list-style-type: none"><li>• TextArea</li><li>• Button (x2)</li></ul>
message_dialog	<ul style="list-style-type: none"><li>• Label</li><li>• Button</li></ul>
radiolist_dialog	<ul style="list-style-type: none"><li>• Label</li><li>• RadioList</li><li>• Button (x2)</li></ul>
checkboxlist_dialog	<ul style="list-style-type: none"><li>• Label</li><li>• CheckboxList</li><li>• Button (x2)</li></ul>
progress_dialog	<ul style="list-style-type: none"><li>• Label</li><li>• TextArea (locked)</li><li>• ProgressBar</li></ul>

Components	Available classnames
Dialog	<ul style="list-style-type: none"> <li>• dialog</li> <li>• dialog.body</li> </ul>
TextArea	<ul style="list-style-type: none"> <li>• text-area</li> <li>• text-area.prompt</li> </ul>
Label	<ul style="list-style-type: none"> <li>• label</li> </ul>
Button	<ul style="list-style-type: none"> <li>• button</li> <li>• button.focused</li> <li>• button.arrow</li> <li>• button.text</li> </ul>
Frame	<ul style="list-style-type: none"> <li>• frame</li> <li>• frame.border</li> <li>• frame.label</li> </ul>
Shadow	<ul style="list-style-type: none"> <li>• shadow</li> </ul>
RadioList	<ul style="list-style-type: none"> <li>• radio-list</li> <li>• radio</li> <li>• radio-checked</li> <li>• radio-selected</li> </ul>
CheckboxList	<ul style="list-style-type: none"> <li>• checkbox-list</li> <li>• checkbox</li> <li>• checkbox-checked</li> <li>• checkbox-selected</li> </ul>
VerticalLine	<ul style="list-style-type: none"> <li>• line</li> <li>• vertical-line</li> </ul>
HorizontalLine	<ul style="list-style-type: none"> <li>• line</li> <li>• horizontal-line</li> </ul>
ProgressBar	<ul style="list-style-type: none"> <li>• progress-bar</li> <li>• progress-bar.used</li> </ul>

### Example

Let's customize the example of the `checkboxlist_dialog`.

It uses 2 Button, a CheckboxList and a Label, packed inside a Dialog. Therefore we can customize each of these elements separately, using for instance:

```

from prompt_toolkit.shortcuts import checkboxlist_dialog
from prompt_toolkit.styles import Style

results = checkboxlist_dialog(
    title="CheckboxList dialog",
    text="What would you like in your breakfast ?",
    values=[
        ("eggs", "Eggs"),
        ("bacon", "Bacon"),
        ("croissants", "20 Croissants"),
        ("daily", "The breakfast of the day")
    ],
    style=Style.from_dict({
        'dialog': 'bg:#cdbbb3',
        'button': 'bg:#bf99a4',
        'checkbox': '#e8612c',
        'dialog.body': 'bg:#a9cfd0',
        'dialog shadow': 'bg:#c98982',
        'frame.label': '#fcaca3',
        'dialog.body label': '#fd8bb6',
    })
).run()

```

## 3.7 Progress bars

Prompt\_toolkit ships with a high level API for displaying progress bars, inspired by [tqdm](#).

**Warning:** The API for the prompt\_toolkit progress bars is still very new and can possibly change in the future. It is usable and tested, but keep this in mind when upgrading.

Remember that the `examples` directory of the prompt\_toolkit repository ships with many progress bar examples as well.

### 3.7.1 Simple progress bar

Creating a new progress bar can be done by calling the `ProgressBar` context manager.

The progress can be displayed for any iterable. This works by wrapping the iterable (like `range`) with the `ProgressBar` context manager itself. This way, the progress bar knows when the next item is consumed by the forloop and when progress happens.

```

from prompt_toolkit.shortcuts import ProgressBar
import time

with ProgressBar() as pb:
    for i in pb(range(800)):
        time.sleep(.01)

```

```

$ python simple-progress-bar.py 39.1% [=====>] 313/800 eta [00:05]

```

Keep in mind that not all iterables can report their total length. This happens with a typical generator. In that case, you can still pass the total as follows in order to make displaying the progress possible:

```
def some_iterable():
    yield ...

with ProgressBar() as pb:
    for i in pb(some_iterable, total=1000):
        time.sleep(.01)
```

### 3.7.2 Multiple parallel tasks

A `prompt_toolkit.ProgressBar` can display the progress of multiple tasks running in parallel. Each task can run in a separate thread and the `ProgressBar` user interface runs in its own thread.

Notice that we set the “daemon” flag for both threads that run the tasks. This is because control-c will stop the progress and quit our application. We don’t want the application to wait for the background threads to finish. Whether you want this depends on the application.

```
from prompt_toolkit.shortcuts import ProgressBar
import time
import threading

with ProgressBar() as pb:
    # Two parallel tasks.
    def task_1():
        for i in pb(range(100)):
            time.sleep(.05)

    def task_2():
        for i in pb(range(150)):
            time.sleep(.08)

    # Start threads.
    t1 = threading.Thread(target=task_1)
    t2 = threading.Thread(target=task_2)
    t1.daemon = True
    t2.daemon = True
    t1.start()
    t2.start()

    # Wait for the threads to finish. We use a timeout for the join() call,
    # because on Windows, join cannot be interrupted by Control-C or any other
    # signal.
    for t in [t1, t2]:
        while t.is_alive():
            t.join(timeout=.5)
```

```
$ python two-tasks.py
100.0% [=====] 100/100 eta [00:00]
51.3% [=====] 77/150 eta [00:05]
```

### 3.7.3 Adding a title and label

Each progress bar can have one title, and for each task an individual label. Both the title and the labels can be *formatted text*.

```

from prompt_toolkit.shortcuts import ProgressBar
from prompt_toolkit.formatted_text import HTML
import time

title = HTML('Downloading <style bg="yellow" fg="black">4 files...</style>')
label = HTML('<ansired>some file</ansired>: ')

with ProgressBar(title=title) as pb:
    for i in pb(range(800), label=label):
        time.sleep(.01)

```

```

$ python colored-title-and-label.py
Downloading 4 files...
some file: 31.5% [==> ] 252/800 eta [00:05]

```

### 3.7.4 Formatting the progress bar

The visualisation of a *ProgressBar* can be customized by using a different sequence of formatters. The default formatting looks something like this:

```

from prompt_toolkit.shortcuts.progress_bar.formatters import *

default_formatting = [
    Label(),
    Text(' '),
    Percentage(),
    Text(' '),
    Bar(),
    Text(' '),
    Progress(),
    Text(' '),
    Text('eta [', style='class:time-left'),
    TimeLeft(),
    Text(']', style='class:time-left'),
    Text(' '),
]

```

That sequence of *Formatter* can be passed to the *formatter* argument of *ProgressBar*. So, we could change this and modify the progress bar to look like an apt-get style progress bar:

```

from prompt_toolkit.shortcuts import ProgressBar
from prompt_toolkit.styles import Style
from prompt_toolkit.shortcuts.progress_bar import formatters
import time

style = Style.from_dict({
    'label': 'bg:#ffff00 #000000',
    'percentage': 'bg:#ffff00 #000000',
    'current': '#448844',
    'bar': '',
})

custom_formatters = [

```

(continues on next page)

(continued from previous page)

```

    formatters.Label(),
    formatters.Text(':', style='class:percentage'),
    formatters.Percentage(),
    formatters.Text(']', style='class:percentage'),
    formatters.Text(' '),
    formatters.Bar(sym_a='#', sym_b='#', sym_c='.'),
    formatters.Text(' '),
]

with ProgressBar(style=style, formatters=custom_formatters) as pb:
    for i in pb(range(1600), label='Installing'):
        time.sleep(.01)

```

```

$ python styled-apt-get-install.py
Installing: [ 64.4%] [#####.....]

```

### 3.7.5 Adding key bindings and toolbar

Like other `prompt_toolkit` applications, we can add custom key bindings, by passing a `KeyBindings` object:

```

from prompt_toolkit import HTML
from prompt_toolkit.key_binding import KeyBindings
from prompt_toolkit.patch_stdout import patch_stdout
from prompt_toolkit.shortcuts import ProgressBar

import os
import time
import signal

bottom_toolbar = HTML('<b>[f]</b> Print "f" <b>[x]</b> Abort.')

# Create custom key bindings first.
kb = KeyBindings()
cancel = [False]

@kb.add('f')
def _(event):
    print('You pressed `f`.')

@kb.add('x')
def _(event):
    " Send Abort (control-c) signal. "
    cancel[0] = True
    os.kill(os.getpid(), signal.SIGINT)

# Use `patch_stdout`, to make sure that prints go above the
# application.
with patch_stdout():
    with ProgressBar(key_bindings=kb, bottom_toolbar=bottom_toolbar) as pb:
        for i in pb(range(800)):
            time.sleep(.01)

            # Stop when the cancel flag has been set.
            if cancel[0]:

```

(continues on next page)

(continued from previous page)

`break`

Notice that we use `patch_stdout()` to make printing text possible while the progress bar is displayed. This ensures that printing happens above the progress bar.

Further, when “x” is pressed, we set a cancel flag, which stops the progress. It would also be possible to send `SIGINT` to the main thread, but that’s not always considered a clean way of cancelling something.

In the example above, we also display a toolbar at the bottom which shows the key bindings.

```
$ python custom-key-bindings-tmp.py
42.6% [=====> ] 341/800 eta [00:04]
[f] Print "f" [x] Abort.
```

*Read more about key bindings ...*

## 3.8 Building full screen applications

`prompt_toolkit` can be used to create complex full screen terminal applications. Typically, an application consists of a layout (to describe the graphical part) and a set of key bindings.

The sections below describe the components required for full screen applications (or custom, non full screen applications), and how to assemble them together.

Before going through this page, it could be helpful to go through *asking for input* (prompts) first. Many things that apply to an input prompt, like styling, key bindings and so on, also apply to full screen applications.

---

**Note:** Also remember that the `examples` directory of the `prompt_toolkit` repository contains plenty of examples. Each example is supposed to explain one idea. So, this as well should help you get started.

Don’t hesitate to open a GitHub issue if you feel that a certain example is missing.

---

### 3.8.1 A simple application

Every `prompt_toolkit` application is an instance of an `Application` object. The simplest full screen example would look like this:

```
from prompt_toolkit import Application

app = Application(full_screen=True)
app.run()
```

This will display a dummy application that says “No layout specified. Press ENTER to quit.”.

---

**Note:** If we wouldn’t set the `full_screen` option, the application would not run in the alternate screen buffer, and only consume the least amount of space required for the layout.

---

An application consists of several components. The most important are:

- I/O objects: the input and output device.

- The layout: this defines the graphical structure of the application. For instance, a text box on the left side, and a button on the right side. You can also think of the layout as a collection of ‘widgets’.
- A style: this defines what colors and underline/bold/italic styles are used everywhere.
- A set of key bindings.

We will discuss all of these in more detail below.

## 3.8.2 I/O objects

Every *Application* instance requires an I/O object for input and output:

- An *Input* instance, which is an abstraction of the input stream (stdin).
- An *Output* instance, which is an abstraction of the output stream, and is called by the renderer.

Both are optional and normally not needed to pass explicitly. Usually, the default works fine.

There is a third I/O object which is also required by the application, but not passed inside. This is the event loop, an *eventloop* instance. This is basically a while-true loop that waits for user input, and when it receives something (like a key press), it will send that to the appropriate handler, like for instance, a key binding.

When *run()* is called, the event loop will run until the application is done. An application will quit when *exit()* is called.

## 3.8.3 The layout

### A layered layout architecture

There are several ways to create a prompt\_toolkit layout, depending on how customizable you want things to be. In fact, there are several layers of abstraction.

- The most low-level way of creating a layout is by combining *Container* and *UIControl* objects.

Examples of *Container* objects are *VSplit* (vertical split), *HSplit* (horizontal split) and *FloatContainer*. These containers arrange the layout and can split it in multiple regions. Each container can recursively contain multiple other containers. They can be combined in any way to define the “shape” of the layout.

The *Window* object is a special kind of container that can contain a *UIControl* object. The *UIControl* object is responsible for the generation of the actual content. The *Window* object acts as an adaptor between the *UIControl* and other containers, but it’s also responsible for the scrolling and line wrapping of the content.

Examples of *UIControl* objects are *BufferControl* for showing the content of an editable/scrollable buffer, and *FormattedTextControl* for displaying (*formatted*) text.

Normally, it is never needed to create new *UIControl* or *Container* classes, but instead you would create the layout by composing instances of the existing built-ins.

- A higher level abstraction of building a layout is by using “widgets”. A widget is a reusable layout component that can contain multiple containers and controls. Widgets have a `__pt_container__` function, which returns the root container for this widget. Prompt\_toolkit contains a couple of widgets like *TextArea*, *Button*, *Frame*, *VerticalLine* and so on.
- The highest level abstractions can be found in the `shortcuts` module. There we don’t have to think about the layout, controls and containers at all. This is the simplest way to use prompt\_toolkit, but is only meant for specific use cases, like a prompt or a simple dialog window.

## Containers and controls

The biggest difference between containers and controls is that containers arrange the layout by splitting the screen in many regions, while controls are responsible for generating the actual content.

**Note:** Under the hood, the difference is:

- containers use *absolute coordinates*, and paint on a *Screen* instance.
- user controls create a *UIContent* instance. This is a collection of lines that represent the actual content. A *UIControl* is not aware of the screen.

Abstract base class	Examples
<i>Container</i>	<i>HSplit VSplit FloatContainer Window ScrollablePane</i>
<i>UIControl</i>	<i>BufferControl FormattedTextControl</i>

The *Window* class itself is particular: it is a *Container* that can contain a *UIControl*. Thus, it's the adaptor between the two. The *Window* class also takes care of scrolling the content and wrapping the lines if needed.

Finally, there is the *Layout* class which wraps the whole layout. This is responsible for keeping track of which window has the focus.

Here is an example of a layout that displays the content of the default buffer on the left, and displays "Hello world" on the right. In between it shows a vertical line:

```
from prompt_toolkit import Application
from prompt_toolkit.buffer import Buffer
from prompt_toolkit.layout.containers import VSplit, Window
from prompt_toolkit.layout.controls import BufferControl, FormattedTextControl
from prompt_toolkit.layout.layout import Layout

buffer1 = Buffer() # Editable buffer.

root_container = VSplit([
    # One window that holds the BufferControl with the default buffer on
    # the left.
    Window(content=BufferControl(buffer=buffer1)),

    # A vertical line in the middle. We explicitly specify the width, to
    # make sure that the layout engine will not try to divide the whole
    # width by three for all these windows. The window will simply fill its
    # content by repeating this character.
    Window(width=1, char='|'),

    # Display the text 'Hello world' on the right.
    Window(content=FormattedTextControl(text='Hello world')),
])

layout = Layout(root_container)

app = Application(layout=layout, full_screen=True)
app.run() # You won't be able to Exit this app
```

Notice that if you execute this right now, there is no way to quit this application yet. This is something we explain in the next section below.

More complex layouts can be achieved by nesting multiple *VSplit*, *HSplit* and *FloatContainer* objects.

If you want to make some part of the layout only visible when a certain condition is satisfied, use a *ConditionalContainer*.

Finally, there is *ScrollablePane*, a container class that can be used to create long forms or nested layouts that are scrollable as a whole.

## Focusing windows

Focusing something can be done by calling the *focus()* method. This method is very flexible and accepts a *Window*, a *Buffer*, a *UIControl* and more.

In the following example, we use *get\_app()* for getting the active application.

```
from prompt_toolkit.application import get_app

# This window was created earlier.
w = Window()

# ...

# Now focus it.
get_app().layout.focus(w)
```

Changing the focus is something which is typically done in a key binding, so read on to see how to define key bindings.

## 3.8.4 Key bindings

In order to react to user actions, we need to create a *KeyBindings* object and pass that to our *Application*.

There are two kinds of key bindings:

- Global key bindings, which are always active.
- Key bindings that belong to a certain *UIControl* and are only active when this control is focused. Both *BufferControl* *FormattedTextControl* take a *key\_bindings* argument.

### Global key bindings

Key bindings can be passed to the application as follows:

```
from prompt_toolkit import Application
from prompt_toolkit.key_binding import KeyBindings

kb = KeyBindings()
app = Application(key_bindings=kb)
app.run()
```

To register a new keyboard shortcut, we can use the *add()* method as a decorator of the key handler:

```
from prompt_toolkit import Application
from prompt_toolkit.key_binding import KeyBindings

kb = KeyBindings()

@kb.add('c-q')
def exit_(event):
```

(continues on next page)

(continued from previous page)

```

"""
    Pressing Ctrl-Q will exit the user interface.

    Setting a return value means: quit the event loop that drives the user
    interface and return this value from the `Application.run()` call.
"""
    event.app.exit()

app = Application(key_bindings=kb, full_screen=True)
app.run()

```

The callback function is named `exit_` for clarity, but it could have been named `_` (underscore) as well, because we won't refer to this name.

*Read more about key bindings ...*

## Modal containers

The following container objects take a modal argument *VSplit*, *HSplit*, and *FloatContainer*.

Setting `modal=True` makes what is called a **modal** container. Normally, a child container would inherit its parent key bindings. This does not apply to **modal** containers.

Consider a **modal** container (e.g. *VSplit*) is child of another container, its parent. Any key bindings from the parent are not taken into account if the **modal** container (child) has the focus.

This is useful in a complex layout, where many controls have their own key bindings, but you only want to enable the key bindings for a certain region of the layout.

The global key bindings are always active.

### 3.8.5 More about the Window class

As said earlier, a *Window* is a *Container* that wraps a *UIControl*, like a *BufferControl* or *FormattedTextControl*.

---

**Note:** Basically, windows are the leafs in the tree structure that represent the UI.

---

A *Window* provides a “view” on the *UIControl*, which provides lines of content. The window is in the first place responsible for the line wrapping and scrolling of the content, but there are much more options.

- Adding left or right margins. These are used for displaying scroll bars or line numbers.
- There are the *cursorline* and *cursorcolumn* options. These allow highlighting the line or column of the cursor position.
- Alignment of the content. The content can be left aligned, right aligned or centered.
- Finally, the background can be filled with a default character.

### 3.8.6 More about buffers and *BufferControl*

## Input processors

A *Processor* is used to postprocess the content of a *BufferControl* before it's displayed. It can for instance highlight matching brackets or change the visualisation of tabs and so on.

A *Processor* operates on individual lines. Basically, it takes a (formatted) line and produces a new (formatted) line.

Some build-in processors:

Processor	Usage:
<i>HighlightSearchProcessor</i>	Highlight the current search results.
<i>HighlightSelectionProcessor</i>	Highlight the selection.
<i>PasswordProcessor</i>	Display input as asterisks. (* characters).
<i>BracketsMismatchProcessor</i>	Highlight open/close mismatches for brackets.
<i>BeforeInput</i>	Insert some text before.
<i>AfterInput</i>	Insert some text after.
<i>AppendAutoSuggestion</i>	Append auto suggestion text.
<i>ShowLeadingWhiteSpaceProcessor</i>	Visualise leading whitespace.
<i>ShowTrailingWhiteSpaceProcessor</i>	Visualise trailing whitespace.
<i>TabsProcessor</i>	Visualise tabs as <i>n</i> spaces, or some symbols.

A *BufferControl* takes only one processor as input, but it is possible to “merge” multiple processors into one with the `merge_processors()` function.

## 3.9 Tutorials

### 3.9.1 Tutorial: Build an SQLite REPL

The aim of this tutorial is to build an interactive command line interface for an SQLite database using `prompt_toolkit`.

First, install the library using pip, if you haven't done this already.

```
pip install prompt_toolkit
```


#### Read User Input

Let's start accepting input using the `prompt()` function. This will ask the user for input, and echo back whatever the user typed. We wrap it in a `main()` function as a good practice.

```
from prompt_toolkit import prompt

def main():
    text = prompt('> ')
    print('You entered:', text)

if __name__ == '__main__':
    main()
```

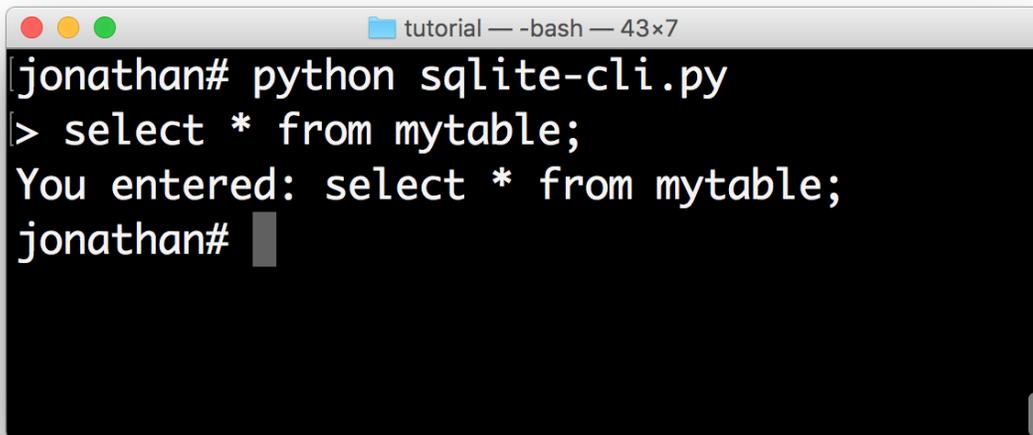A terminal window titled 'tutorial --bash-- 43x7' showing a shell prompt 'jonathan#'. The user enters 'python sqlite-cli.py', which prompts '> select \* from mytable;'. The terminal then displays 'You entered: select \* from mytable;' and returns to the shell prompt 'jonathan#'.

```
jonathan# python sqlite-cli.py
> select * from mytable;
You entered: select * from mytable;
jonathan#
```

### Loop The REPL

Now we want to call the `prompt()` method in a loop. In order to keep the history, the easiest way to do it is to use a `PromptSession`. This uses an `InMemoryHistory` underneath that keeps track of the history, so that if the user presses the up-arrow, they'll see the previous entries.


The `prompt()` method raises `KeyboardInterrupt` when ControlC has been pressed and `EOFError` when ControlD has been pressed. This is what people use for cancelling commands and exiting in a REPL. The try/except below handles these error conditions and make sure that we go to the next iteration of the loop or quit the loop respectively.

```
from prompt_toolkit import PromptSession

def main():
    session = PromptSession()

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
            print('GoodBye!')

if __name__ == '__main__':
    main()
```

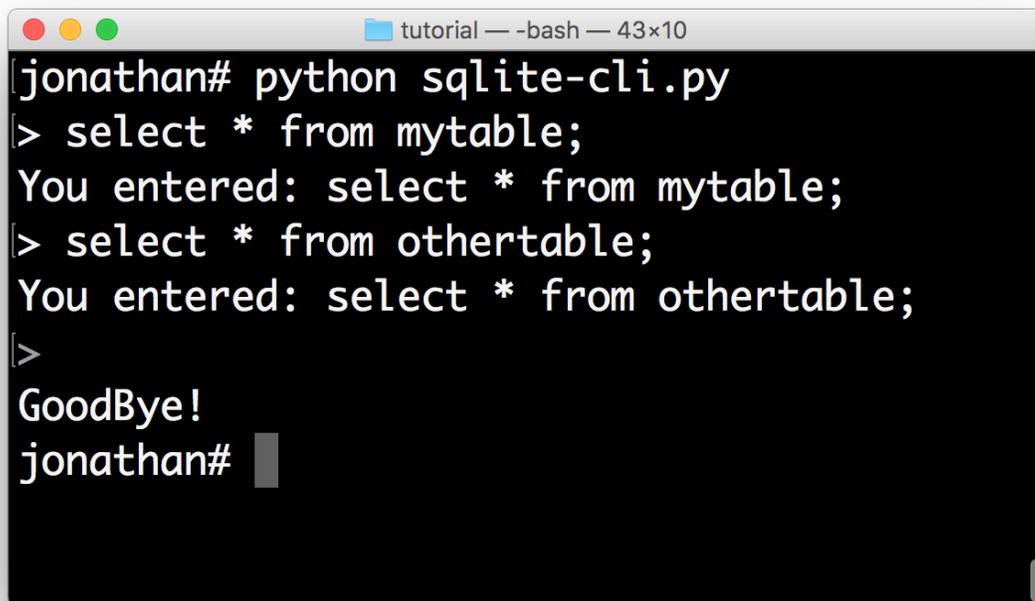

```
jonathan# python sqlite-cli.py
> select * from mytable;
You entered: select * from mytable;
> select * from othertable;
You entered: select * from othertable;
>
GoodBye!
jonathan#
```

## Syntax Highlighting

This is where things get really interesting. Let's step it up a notch by adding syntax highlighting to the user input. We know that users will be entering SQL statements, so we can leverage the `Pygments` library for coloring the input. The `lexer` parameter allows us to set the syntax lexer. We're going to use the `SqlLexer` from the `Pygments` library for highlighting.


Notice that in order to pass a `Pygments` lexer to `prompt_toolkit`, it needs to be wrapped into a `PygmentsLexer`.

```
from prompt_toolkit import PromptSession
from prompt_toolkit.lexers import PygmentsLexer
from pygments.lexers.sql import SqlLexer

def main():
    session = PromptSession(lexer=PygmentsLexer(SqlLexer))

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
    print('GoodBye!')

if __name__ == '__main__':
    main()
```

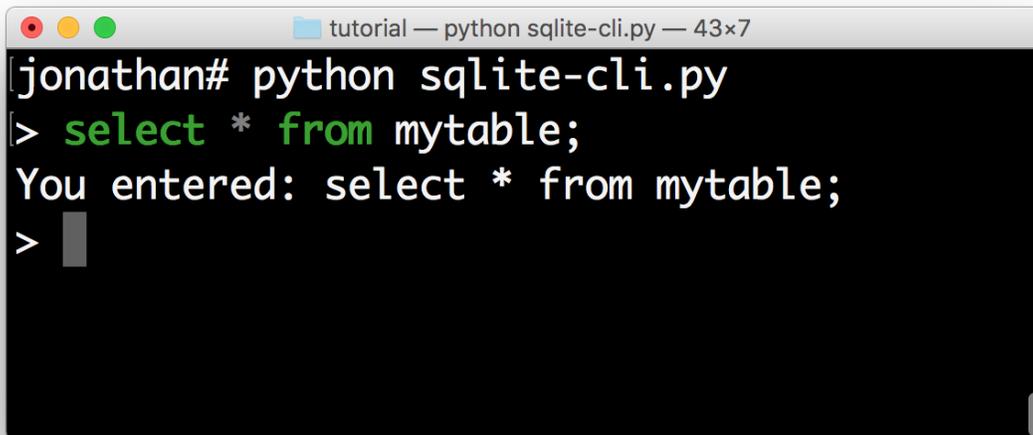

```
jonathan# python sqlite-cli.py
> select * from mytable;
You entered: select * from mytable;
>
```

### Auto-completion

Now we are going to add auto completion. We'd like to display a drop down menu of possible keywords when the user starts typing.

We can do this by creating an `sql_completer` object from the `WordCompleter` class, defining a set of keywords for the auto-completion.

Like the lexer, this `sql_completer` instance can be passed to either the `PromptSession` class or the `prompt()` method.

```
from prompt_toolkit import PromptSession
from prompt_toolkit.completion import WordCompleter
from prompt_toolkit.lexers import PygmentsLexer
from pygments.lexers.sql import SqlLexer

sql_completer = WordCompleter([
    'abort', 'action', 'add', 'after', 'all', 'alter', 'analyze', 'and',
    'as', 'asc', 'attach', 'autoincrement', 'before', 'begin', 'between',
    'by', 'cascade', 'case', 'cast', 'check', 'collate', 'column',
    'commit', 'conflict', 'constraint', 'create', 'cross', 'current_date',
    'current_time', 'current_timestamp', 'database', 'default',
    'deferrable', 'deferred', 'delete', 'desc', 'detach', 'distinct',
    'drop', 'each', 'else', 'end', 'escape', 'except', 'exclusive',
    'exists', 'explain', 'fail', 'for', 'foreign', 'from', 'full', 'glob',
    'group', 'having', 'if', 'ignore', 'immediate', 'in', 'index',
    'indexed', 'initially', 'inner', 'insert', 'instead', 'intersect',
    'into', 'is', 'isnull', 'join', 'key', 'left', 'like', 'limit',
    'match', 'natural', 'no', 'not', 'notnull', 'null', 'of', 'offset',
    'on', 'or', 'order', 'outer', 'plan', 'pragma', 'primary', 'query',
    'raise', 'recursive', 'references', 'regexp', 'reindex', 'release',
    'rename', 'replace', 'restrict', 'right', 'rollback', 'row',
    'savepoint', 'select', 'set', 'table', 'temp', 'temporary', 'then',
    'to', 'transaction', 'trigger', 'union', 'unique', 'update', 'using',
```

(continues on next page)


(continued from previous page)

```
'vacuum', 'values', 'view', 'virtual', 'when', 'where', 'with',
'without'], ignore_case=True)

def main():
    session = PromptSession(
        lexer=PygmentsLexer(SqlLexer), completer=sql_completer)

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
    print('GoodBye!')

if __name__ == '__main__':
    main()
```

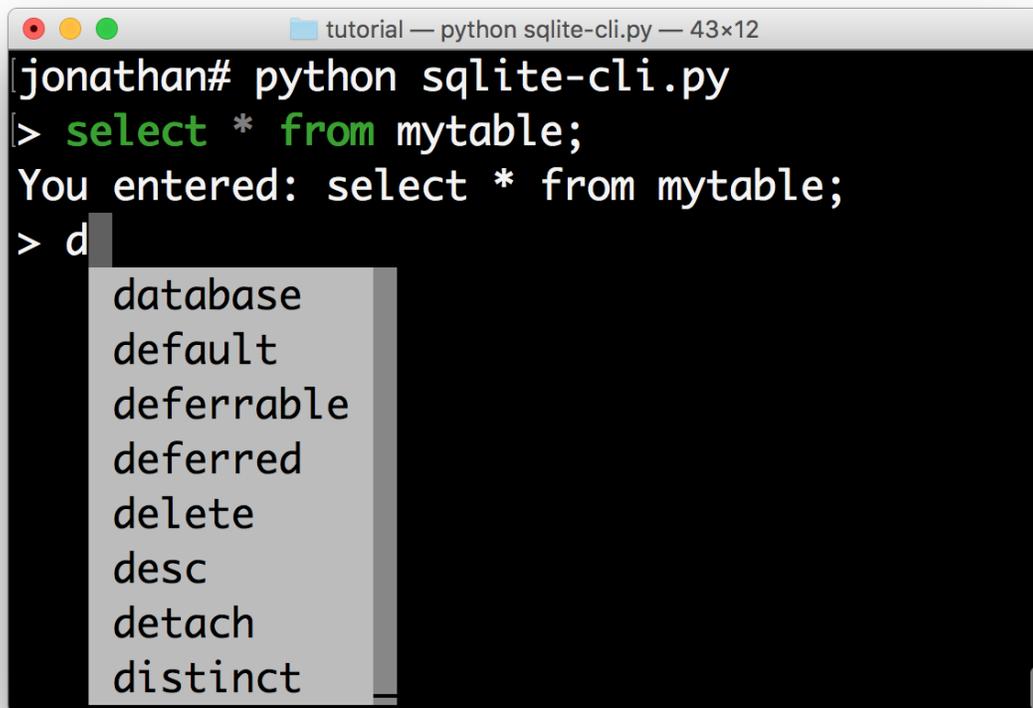A screenshot of a terminal window titled "tutorial — python sqlite-cli.py — 43x12". The prompt is "jonathan# python sqlite-cli.py". The user enters "> select \* from mytable;". The prompt changes to "You entered: select \* from mytable;". The user enters "> d". A dropdown menu appears with the following options: "database", "default", "deferrable", "deferred", "delete", "desc", "detach", and "distinct".

```
jonathan# python sqlite-cli.py
> select * from mytable;
You entered: select * from mytable;
> d
database
default
deferrable
deferred
delete
desc
detach
distinct
```

In about 30 lines of code we got ourselves an auto completing, syntax highlighting REPL. Let's make it even better.

## Styling the menus

If we want, we can now change the colors of the completion menu. This is possible by creating a `Style` instance and passing it to the `prompt()` function.

```

from prompt_toolkit import PromptSession
from prompt_toolkit.completion import WordCompleter
from prompt_toolkit.lexers import PygmentsLexer
from prompt_toolkit.styles import Style
from pygments.lexers.sql import SqlLexer

sql_completer = WordCompleter([
    'abort', 'action', 'add', 'after', 'all', 'alter', 'analyze', 'and',
    'as', 'asc', 'attach', 'autoincrement', 'before', 'begin', 'between',
    'by', 'cascade', 'case', 'cast', 'check', 'collate', 'column',
    'commit', 'conflict', 'constraint', 'create', 'cross', 'current_date',
    'current_time', 'current_timestamp', 'database', 'default',
    'deferrable', 'deferred', 'delete', 'desc', 'detach', 'distinct',
    'drop', 'each', 'else', 'end', 'escape', 'except', 'exclusive',
    'exists', 'explain', 'fail', 'for', 'foreign', 'from', 'full', 'glob',
    'group', 'having', 'if', 'ignore', 'immediate', 'in', 'index',
    'indexed', 'initially', 'inner', 'insert', 'instead', 'intersect',
    'into', 'is', 'isnull', 'join', 'key', 'left', 'like', 'limit',
    'match', 'natural', 'no', 'not', 'notnull', 'null', 'of', 'offset',
    'on', 'or', 'order', 'outer', 'plan', 'pragma', 'primary', 'query',
    'raise', 'recursive', 'references', 'regexp', 'reindex', 'release',
    'rename', 'replace', 'restrict', 'right', 'rollback', 'row',
    'savepoint', 'select', 'set', 'table', 'temp', 'temporary', 'then',
    'to', 'transaction', 'trigger', 'union', 'unique', 'update', 'using',
    'vacuum', 'values', 'view', 'virtual', 'when', 'where', 'with',
    'without'], ignore_case=True)


style = Style.from_dict({
    'completion-menu.completion': 'bg:#008888 #ffffff',
    'completion-menu.completion.current': 'bg:#00aaaa #000000',
    'scrollbar.background': 'bg:#88aaaa',
    'scrollbar.button': 'bg:#222222',
})

def main():
    session = PromptSession(
        lexer=PygmentsLexer(SqlLexer), completer=sql_completer, style=style)

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue
        except EOFError:
            break
        else:
            print('You entered:', text)
    print('GoodBye!')

if __name__ == '__main__':
    main()

```

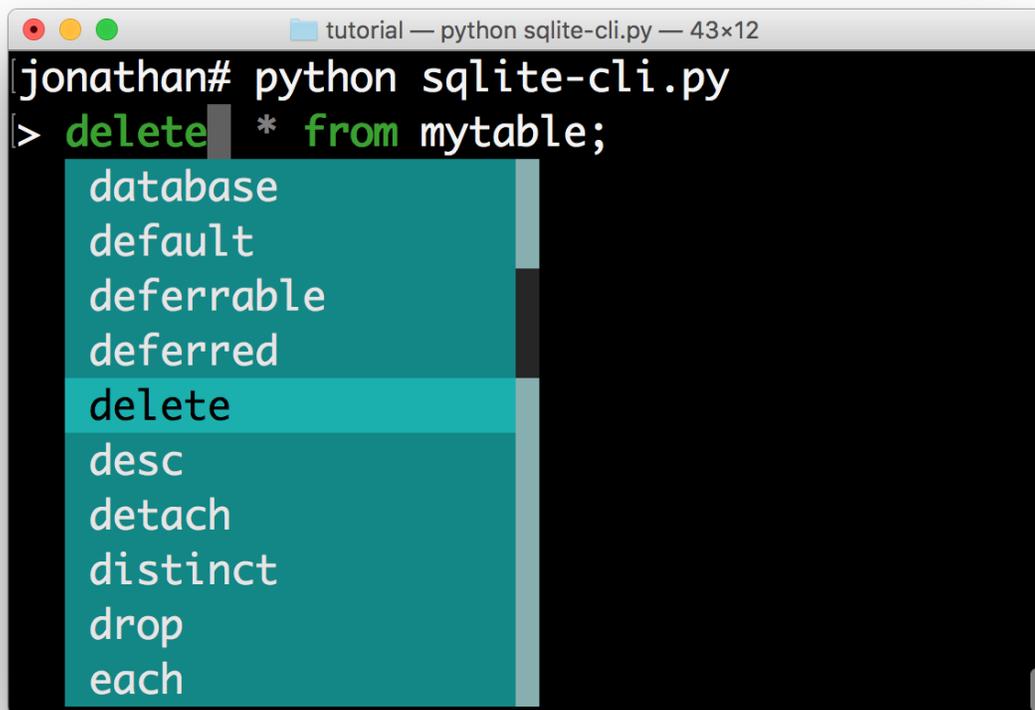

```
jonathan# python sqlite-cli.py
> delete * from mytable;
database
default
deferrable
deferred
delete
desc
detach
distinct
drop
each
```

All that's left is hooking up the sqlite backend, which is left as an exercise for the reader. Just kidding... Keep reading.

### Hook up Sqlite

This step is the final step to make the SQLite REPL actually work. It's time to relay the input to SQLite.

Obviously I haven't done the due diligence to deal with the errors. But it gives a good idea of how to get started.

```
#!/usr/bin/env python
import sys
import sqlite3

from prompt_toolkit import PromptSession
from prompt_toolkit.completion import WordCompleter
from prompt_toolkit.lexers import PygmentsLexer
from prompt_toolkit.styles import Style
from pygments.lexers.sql import SqlLexer

sql_completer = WordCompleter([
    'abort', 'action', 'add', 'after', 'all', 'alter', 'analyze', 'and',
    'as', 'asc', 'attach', 'autoincrement', 'before', 'begin', 'between',
    'by', 'cascade', 'case', 'cast', 'check', 'collate', 'column',
    'commit', 'conflict', 'constraint', 'create', 'cross', 'current_date',
    'current_time', 'current_timestamp', 'database', 'default',
    'deferrable', 'deferred', 'delete', 'desc', 'detach', 'distinct',
```

(continues on next page)

(continued from previous page)

```

'drop', 'each', 'else', 'end', 'escape', 'except', 'exclusive',
'exists', 'explain', 'fail', 'for', 'foreign', 'from', 'full', 'glob',
'group', 'having', 'if', 'ignore', 'immediate', 'in', 'index',
'indexed', 'initially', 'inner', 'insert', 'instead', 'intersect',
'into', 'is', 'isnull', 'join', 'key', 'left', 'like', 'limit',
'match', 'natural', 'no', 'not', 'notnull', 'null', 'of', 'offset',
'on', 'or', 'order', 'outer', 'plan', 'pragma', 'primary', 'query',
'raise', 'recursive', 'references', 'regexp', 'reindex', 'release',
'rename', 'replace', 'restrict', 'right', 'rollback', 'row',
'savepoint', 'select', 'set', 'table', 'temp', 'temporary', 'then',
'to', 'transaction', 'trigger', 'union', 'unique', 'update', 'using',
'vacuum', 'values', 'view', 'virtual', 'when', 'where', 'with',
'without'], ignore_case=True)

style = Style.from_dict({
    'completion-menu.completion': 'bg:#008888 #ffffff',
    'completion-menu.completion.current': 'bg:#00aaaa #000000',
    'scrollbar.background': 'bg:#88aaaa',
    'scrollbar.button': 'bg:#222222',
})

def main(database):
    connection = sqlite3.connect(database)
    session = PromptSession(
        lexer=PygmentsLexer(SqlLexer), completer=sql_completer, style=style)

    while True:
        try:
            text = session.prompt('> ')
        except KeyboardInterrupt:
            continue # Control-C pressed. Try again.
        except EOFError:
            break # Control-D pressed.


        with connection:
            try:
                messages = connection.execute(text)
            except Exception as e:
                print(repr(e))
            else:
                for message in messages:
                    print(message)

    print('GoodBye!')

if __name__ == '__main__':
    if len(sys.argv) < 2:
        db = ':memory:'
    else:
        db = sys.argv[1]

    main(db)

```

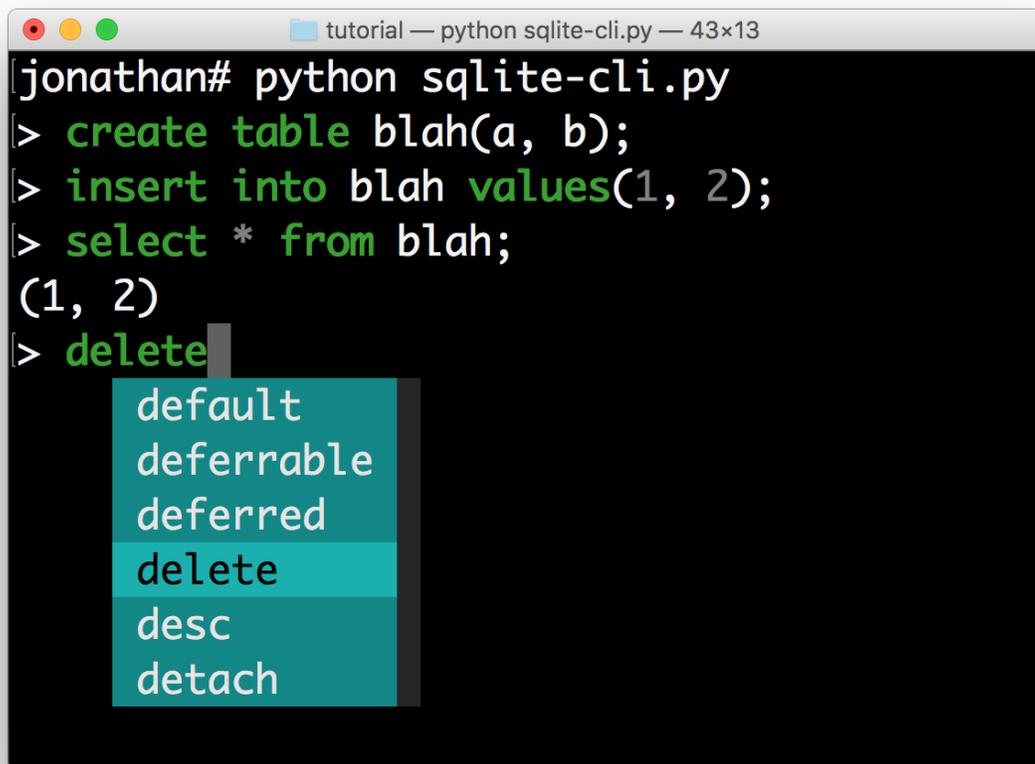

```
jonathan# python sqlite-cli.py
> create table blah(a, b);
> insert into blah values(1, 2);
> select * from blah;
(1, 2)
> delete
```

I hope that gives an idea of how to get started on building command line interfaces.

The End.

## 3.10 Advanced topics

### 3.10.1 More about key bindings

This page contains a few additional notes about key bindings.

Key bindings can be defined as follows by creating a *KeyBindings* instance:

```
from prompt_toolkit.key_binding import KeyBindings

bindings = KeyBindings()

@bindings.add('a')
def _(event):
    " Do something if 'a' has been pressed. "
    ...
```

(continues on next page)

(continued from previous page)

```
@bindings.add('c-t')
def _(event):
    " Do something if Control-T has been pressed. "
    ...
```

**Note:** `c-q` (control-q) and `c-s` (control-s) are often captured by the terminal, because they were used traditionally for software flow control. When this is enabled, the application will automatically freeze when `c-s` is pressed, until `c-q` is pressed. It won't be possible to bind these keys.

In order to disable this, execute the following command in your shell, or even add it to your `.bashrc`.

```
stty -ixon
```

Key bindings can even consist of a sequence of multiple keys. The binding is only triggered when all the keys in this sequence are pressed.

```
@bindings.add('a', 'b')
def _(event):
    " Do something if 'a' is pressed and then 'b' is pressed. "
    ...
```

If the user presses only `a`, then nothing will happen until either a second key (like `b`) has been pressed or until the timeout expires (see later).

### List of special keys

Besides literal characters, any of the following keys can be used in a key binding:

Name	Possible keys
Escape Shift + escape	escape s-escape
Arrows	left, right, up, down
Navigation	home, end, delete, pageup, pagedown, insert
Control+letter	c-a, c-b, c-c, c-d, c-e, c-f, c-g, c-h, c-i, c-j, c-k, c-l, c-m, c-n, c-o, c-p, c-q, c-r, c-s, c-t, c-u, c-v, c-w, c-x, c-y, c-z
Control + number	c-1, c-2, c-3, c-4, c-5, c-6, c-7, c-8, c-9, c-0
Control + arrow	c-left, c-right, c-up, c-down
Other control keys	c-@, c-\, c-], c-^, c-_, c-delete
Shift + arrow	s-left, s-right, s-up, s-down
Control + Shift + arrow	c-s-left, c-s-right, c-s-up, c-s-down
Other shift keys	s-delete, s-tab
F-keys	f1, f2, f3, f4, f5, f6, f7, f8, f9, f10, f11, f12, f13, f14, f15, f16, f17, f18, f19, f20, f21, f22, f23, f24

There are a couple of useful aliases as well:

c-h	backspace
c-@	c-space
c-m	enter
c-i	tab

---

**Note:** Note that the supported keys are limited to what typical VT100 terminals offer. Binding `c-7` (control + number 7) for instance is not supported.

---

### Binding alt+something, option+something or meta+something

Vt100 terminals translate the alt key into a leading `escape` key. For instance, in order to handle `alt-f`, we have to handle `escape + f`. Notice that we receive this as two individual keys. This means that it's exactly the same as first typing `escape` and then typing `f`. Something this alt-key is also known as option or meta.

In code that looks as follows:

```
@bindings.add('escape', 'f')
def _(event):
    " Do something if alt-f or meta-f have been pressed. "
```

### Wildcards

Sometimes you want to catch any key that follows after a certain key stroke. This is possible by binding the `<any>` key:

```
@bindings.add('a', '<any>')
def _(event):
    ...
```

This will handle `aa`, `ab`, `ac`, etcetera. The key binding can check the `event` object for which keys exactly have been pressed.

### Attaching a filter (condition)

In order to enable a key binding according to a certain condition, we have to pass it a `Filter`, usually a `Condition` instance. (*Read more about filters.*)

```
from prompt_toolkit.filters import Condition

@Condition
def is_active():
    " Only activate key binding on the second half of each minute. "
    return datetime.datetime.now().second > 30

@bindings.add('c-t', filter=is_active)
def _(event):
    # ...
    pass
```

The key binding will be ignored when this condition is not satisfied.

## ConditionalKeyBindings: Disabling a set of key bindings

Sometimes you want to enable or disable a whole set of key bindings according to a certain condition. This is possible by wrapping it in a *ConditionalKeyBindings* object.

```
from prompt_toolkit.key_binding import ConditionalKeyBindings

@Condition
def is_active():
    " Only activate key binding on the second half of each minute. "
    return datetime.datetime.now().second > 30

bindings = ConditionalKeyBindings(
    key_bindings=my_bindings,
    filter=is_active)
```

If the condition is not satisfied, all the key bindings in *my\_bindings* above will be ignored.

## Merging key bindings

Sometimes you have different parts of your application generate a collection of key bindings. It is possible to merge them together through the *merge\_key\_bindings()* function. This is preferred above passing a *KeyBindings* object around and having everyone populate it.

```
from prompt_toolkit.key_binding import merge_key_bindings

bindings = merge_key_bindings([
    bindings1,
    bindings2,
])
```

## Eager

Usually not required, but if ever you have to override an existing key binding, the *eager* flag can be useful.

Suppose that there is already an active binding for *ab* and you'd like to add a second binding that only handles *a*. When the user presses only *a*, *prompt\_toolkit* has to wait for the next key press in order to know which handler to call.

By passing the *eager* flag to this second binding, we are actually saying that *prompt\_toolkit* shouldn't wait for longer matches when all the keys in this key binding are matched. So, if *a* has been pressed, this second binding will be called, even if there's an active *ab* binding.

```
@bindings.add('a', 'b')
def binding_1(event):
    ...

@bindings.add('a', eager=True)
def binding_2(event):
    ...
```

This is mainly useful in order to conditionally override another binding.

## Asyncio coroutines

Key binding handlers can be asyncio coroutines.

```
from prompt_toolkit.application import in_terminal

@bindings.add('x')
async def print_hello(event):
    """
    Pressing 'x' will print 5 times "hello" in the background above the
    prompt.
    """
    for i in range(5):
        # Print hello above the current prompt.
        async with in_terminal():
            print('hello')

        # Sleep, but allow further input editing in the meantime.
        await asyncio.sleep(1)
```

If the user accepts the input on the prompt, while this coroutine is not yet finished, an `asyncio.CancelledError` exception will be thrown in this coroutine.

## Timeouts

There are two timeout settings that effect the handling of keys.

- `Application.timeoutlen`: Like Vim's `timeoutlen` option. When to flush the input (For flushing escape keys.) This is important on terminals that use vt100 input. We can't distinguish the escape key from for instance the left-arrow key, if we don't know what follows after "x1b". This little timer will consider "x1b" to be escape if nothing did follow in this time span. This seems to work like the `timeoutlen` option in Vim.
- `KeyProcessor.timeoutlen`: like Vim's `timeoutlen` option. This can be `None` or a float. For instance, suppose that we have a key binding AB and a second key binding A. If the user presses A and then waits, we don't handle this binding yet (unless it was marked 'eager'), because we don't know what will follow. This timeout is the maximum amount of time that we wait until we call the handlers anyway. Pass `None` to disable this timeout.

## Recording macros

Both Emacs and Vi mode allow macro recording. By default, all key presses are recorded during a macro, but it is possible to exclude certain keys by setting the `record_in_macro` parameter to `False`:

```
@bindings.add('c-t', record_in_macro=False)
def _(event):
    # ...
    pass
```

## Creating new Vi text objects and operators

We tried very hard to ship `prompt_toolkit` with as many as possible Vi text objects and operators, so that text editing feels as natural as possible to Vi users.

If you wish to create a new text object or key binding, that is actually possible. Check the `custom-vi-operator-and-text-object.py` example for more information.

## Handling SIGINT

The SIGINT Unix signal can be handled by binding `<sigint>`. For instance:

```
@bindings.add('<sigint>')
def _(event):
    # ...
    pass
```

This will handle a SIGINT that was sent by an external application into the process. Handling control-c should be done by binding `c-c`. (The terminal input is set to raw mode, which means that a `c-c` won't be translated into a SIGINT.)

For a `PromptSession`, there is a default binding for `<sigint>` that corresponds to `c-c`: it will exit the prompt, raising a `KeyboardInterrupt` exception.

## Processing `.inputrc`

GNU readline can be configured using an `.inputrc` configuration file. This file contains key bindings as well as certain settings. Right now, `prompt_toolkit` doesn't support `.inputrc`, but it should be possible in the future.

### 3.10.2 More about styling

This page will attempt to explain in more detail how to use styling in `prompt_toolkit`.

To some extent, it is very similar to how `Pygments` styling works.

## Style strings

Many user interface controls, like `Window` accept a `style` argument which can be used to pass the formatting as a string. For instance, we can select a foreground color:

- `"fg:ansired"` (ANSI color palette)
- `"fg:ansiblue"` (ANSI color palette)
- `"fg:#ffaa33"` (hexadecimal notation)
- `"fg:darkred"` (named color)

Or a background color:

- `"bg:ansired"` (ANSI color palette)
- `"bg:#ffaa33"` (hexadecimal notation)

Or we can add one of the following flags:

- `"bold"`
- `"italic"`
- `"underline"`
- `"blink"`
- `"reverse"` (reverse foreground and background on the terminal.)
- `"hidden"`

Or their negative variants:

- "nobold"
- "noitalic"
- "nounderline"
- "noblink"
- "noreverse"
- "nohidden"

All of these formatting options can be combined as well:

- "fg:ansiyellow bg:black bold underline"

The style string can be given to any user control directly, or to a *Container* object from where it will propagate to all its children. A style defined by a parent user control can be overridden by any of its children. The parent can for instance say `style="bold underline"` where a child overrides this style partly by specifying `style="nobold bg:ansired"`.

---

**Note:** These styles are actually compatible with *Pygments* styles, with additional support for *reverse* and *blink*. Further, we ignore flags like *roman*, *sans*, *mono* and *border*.

---

The following ANSI colors are available (both for foreground and background):

```
# Low intensity, dark. (One or two components 0x80, the other 0x00.)
ansiblack, ansired, ansigreen, ansiyellow, ansiblue
ansimagenta, 'ansicyan, ansigray

# High intensity, bright.
ansibrightblack, ansibrightred, ansibrightgreen, ansibrighyellow
ansibrightblue, ansibrightmagenta, ansibrightcyan, ansiwhite
```

In order to know which styles are actually used in an application, it is possible to call `get_used_style_strings()`, when the application is done.

## Class names

Like we do for web design, it is not a good habit to specify all styling inline. Instead, we can attach class names to UI controls and have a style sheet that refers to these class names. The *Style* can be passed as an argument to the *Application*.

```
from prompt_toolkit.layout import VSplit, Window
from prompt_toolkit.styles import Style

layout = VSplit([
    Window(BufferControl(...), style='class:left'),
    HSplit([
        Window(BufferControl(...), style='class:top'),
        Window(BufferControl(...), style='class:bottom'),
    ], style='class:right')
])

style = Style([
    ('left', 'bg:ansired'),
    ('top', 'fg:#00aaaa'),
```

(continues on next page)

(continued from previous page)

```
    ('bottom', 'underline bold'),
  ])
```

It is possible to add multiple class names to an element. That way we'll combine the styling for these class names. Multiple classes can be passed by using a comma separated list, or by using the `class:` prefix twice.

```
Window(BufferControl(...), style='class:left,bottom'),
Window(BufferControl(...), style='class:left class:bottom'),
```

It is possible to combine class names and inline styling. The order in which the class names and inline styling is specified determines the order of priority. In the following example for instance, we'll take first the style of the "header" class, and then override that with a red background color.

```
Window(BufferControl(...), style='class:header bg:red'),
```

### Dot notation in class names

The dot operator has a special meaning in a class name. If we write: `style="class:a.b.c"`, then this will actually expand to the following: `style="class:a class:a.b class:a.b.c"`.

This is mainly added for `Pygments` lexers, which specify "Tokens" like this, but it's useful in other situations as well.

### Multiple classes in a style sheet

A style sheet can be more complex as well. We can for instance specify two class names. The following will underline the left part within the header, or whatever has both the class "left" and the class "header" (the order doesn't matter).

```
style = Style([
    ('header left', 'underline'),
  ])
```

If you have a dotted class, then it's required to specify the whole path in the style sheet (just typing `c` or `b.c` doesn't work if the class is `a.b.c`):

```
style = Style([
    ('a.b.c', 'underline'),
  ])
```

It is possible to combine this:

```
style = Style([
    ('header body left.text', 'underline'),
  ])
```

### Evaluation order of rules in a style sheet

The style is determined as follows:

- First, we concatenate all the style strings from the root control through all the parents to the child in one big string. (Things at the right take precedence anyway.)

E.g: `class:body bg:#aaaaaa #000000 class:header.focused class:left.text.highlighted underline`

- Then we go through this style from left to right, starting from the default style. Inline styling is applied directly. If we come across a class name, then we generate all combinations of the class names that we collected so far (this one and all class names to the left), and for each combination which includes the new class name, we look for matching rules in our style sheet. All these rules are then applied (later rules have higher priority). If we find a dotted class name, this will be expanded in the individual names (like `class:left` `class:left.text` `class:left.text.highlighted`), and all these are applied like any class names.
- Then this final style is applied to this user interface element.

## Using a dictionary as a style sheet

The order of the rules in a style sheet is meaningful, so typically, we use a list of tuples to specify the style. But it is also possible to use a dictionary as a style sheet. This makes sense for Python 3.6, where dictionaries remember their ordering. An `OrderedDict` works as well.

```
from prompt_toolkit.styles import Style

style = Style.from_dict({
    'header body left.text': 'underline',
})
```

## Loading a style from Pygments

Pygments has a slightly different notation for specifying styles, because it maps styling to Pygments “Tokens”. A Pygments style can however be loaded and used as follows:

```
from prompt_toolkit.styles.pygments import style_from_pygments_cls
from pygments.styles import get_style_by_name

style = style_from_pygments_cls(get_style_by_name('monokai'))
```

## Merging styles together

Multiple `Style` objects can be merged together as follows:

```
from prompt_toolkit.styles import merge_styles

style = merge_styles([
    style1,
    style2,
    style3
])
```

## Color depths

There are four different levels of color depths available:

1 bit	Black and white	<code>ColorDepth.DEPTH_1_BIT</code>	<code>ColorDepth.MONOCHROME</code>
4 bit	ANSI colors	<code>ColorDepth.DEPTH_4_BIT</code>	<code>ColorDepth.ANSI_COLORS_ONLY</code>
8 bit	256 colors	<code>ColorDepth.DEPTH_8_BIT</code>	<code>ColorDepth.DEFAULT</code>
24 bit	True colors	<code>ColorDepth.DEPTH_24_BIT</code>	<code>ColorDepth.TRUE_COLOR</code>

By default, 256 colors are used, because this is what most terminals support these days. If the `TERM` environment variable is set to `linux` or `eterm-color`, then only ANSI colors are used, because of these terminals. The 24 bit true color output needs to be enabled explicitly. When 4 bit color output is chosen, all colors will be mapped to the closest ANSI color.

Setting the default color depth for any `prompt_toolkit` application can be done by setting the `PROMPT_TOOLKIT_COLOR_DEPTH` environment variable. You could for instance copy the following into your `.bashrc` file.

```
# export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_1_BIT
export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_4_BIT
# export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_8_BIT
# export PROMPT_TOOLKIT_COLOR_DEPTH=DEPTH_24_BIT
```

An application can also decide to set the color depth manually by passing a `ColorDepth` value to the `Application` object:

```
from prompt_toolkit.output.color_depth import ColorDepth

app = Application(
    color_depth=ColorDepth.ANSI_COLORS_ONLY,
    # ...
)
```

## Style transformations

`Prompt_toolkit` supports a way to apply certain transformations to the styles near the end of the rendering pipeline. This can be used for instance to change certain colors to improve the rendering in some terminals.

One useful example is the `AdjustBrightnessStyleTransformation` class, which takes `min_brightness` and `max_brightness` as arguments which by default have 0.0 and 1.0 as values. In the following code snippet, we increase the minimum brightness to improve rendering on terminals with a dark background.

```
from prompt_toolkit.styles import AdjustBrightnessStyleTransformation

app = Application(
    style_transformation=AdjustBrightnessStyleTransformation(
        min_brightness=0.5, # Increase the minimum brightness.
        max_brightness=1.0,
    )
    # ...
)
```

### 3.10.3 Filters

Many places in `prompt_toolkit` require a boolean value that can change over time. For instance:

- to specify whether a part of the layout needs to be visible or not;
- or to decide whether a certain key binding needs to be active or not;
- or the `wrap_lines` option of `BufferControl`;
- etcetera.

These booleans are often dynamic and can change at runtime. For instance, the search toolbar should only be visible when the user is actually searching (when the search buffer has the focus). The `wrap_lines` option could be changed with a certain key binding. And that key binding could only work when the default buffer got the focus.

In *prompt\_toolkit*, we decided to reduce the amount of state in the whole framework, and apply a simple kind of reactive programming to describe the flow of these booleans as expressions. (It's one-way only: if a key binding needs to know whether it's active or not, it can follow this flow by evaluating an expression.)

The (abstract) base class is *Filter*, which wraps an expression that takes no input and evaluates to a boolean. Getting the state of a filter is done by simply calling it.

## An example

The most obvious way to create such a *Filter* instance is by creating a *Condition* instance from a function. For instance, the following condition will evaluate to `True` when the user is searching:

```
from prompt_toolkit.application.current import get_app
from prompt_toolkit.filters import Condition

is_searching = Condition(lambda: get_app().is_searching)
```

A different way of writing this, is by using the decorator syntax:

```
from prompt_toolkit.application.current import get_app
from prompt_toolkit.filters import Condition

@Condition
def is_searching():
    return get_app().is_searching
```

This filter can then be used in a key binding, like in the following snippet:

```
from prompt_toolkit.key_binding import KeyBindings

kb = KeyBindings()

@kb.add('c-t', filter=is_searching)
def _(event):
    # Do, something, but only when searching.
    pass
```

If we want to know the boolean value of this filter, we have to call it like a function:

```
print(is_searching())
```

## Built-in filters

There are many built-in filters, ready to use. All of them have a lowercase name, because they represent the wrapped function underneath, and can be called as a function.

- `has_arg`
- `has_completions`
- `has_focus`
- `buffer_has_focus`

- has\_selection
- has\_validation\_error
- is\_aborting
- is\_done
- is\_read\_only
- is\_multiline
- renderer\_height\_is\_known
- *in\_editing\_mode*
- in\_paste\_mode
- vi\_mode
- vi\_navigation\_mode
- vi\_insert\_mode
- vi\_insert\_multiple\_mode
- vi\_replace\_mode
- vi\_selection\_mode
- vi\_waiting\_for\_text\_object\_mode
- vi\_digraph\_mode
- emacs\_mode
- emacs\_insert\_mode
- emacs\_selection\_mode
- is\_searching
- control\_is\_searchable
- vi\_search\_direction\_reversed

### Combining filters

Filters can be chained with the & (AND) and | (OR) operators and negated with the ~ (negation) operator.

Some examples:

```
from prompt_toolkit.key_binding import KeyBindings
from prompt_toolkit.filters import has_selection, has_selection

kb = KeyBindings()

@kb.add('c-t', filter=~is_searching)
def _(event):
    " Do something, but not while searching. "
    pass

@kb.add('c-t', filter=has_search | has_selection)
def _(event):
    " Do something, but only when searching or when there is a selection. "
    pass
```

## to\_filter

Finally, in many situations you want your code to expose an API that is able to deal with both booleans as well as filters. For instance, when for most users a boolean works fine because they don't need to change the value over time, while some advanced users want to be able this value to a certain setting or event that does changes over time.

In order to handle both use cases, there is a utility called `to_filter()`.

This is a function that takes either a boolean or an actual *Filter* instance, and always returns a *Filter*.

```
from prompt_toolkit.filters.utils import to_filter

# In each of the following three examples, 'f' will be a `Filter`
# instance.
f = to_filter(True)
f = to_filter(False)
f = to_filter(Condition(lambda: True))
f = to_filter(has_search | has_selection)
```

### 3.10.4 The rendering flow

Understanding the rendering flow is important for understanding how *Container* and *UIControl* objects interact. We will demonstrate it by explaining the flow around a *BufferControl*.

---

**Note:** A *BufferControl* is a *UIControl* for displaying the content of a *Buffer*. A buffer is the object that holds any editable region of text. Like all controls, it has to be wrapped into a *Window*.

---

Let's take the following code:

```
from prompt_toolkit.enums import DEFAULT_BUFFER
from prompt_toolkit.layout.containers import Window
from prompt_toolkit.layout.controls import BufferControl
from prompt_toolkit.buffer import Buffer

b = Buffer(name=DEFAULT_BUFFER)
Window(content=BufferControl(buffer=b))
```

What happens when a *Renderer* objects wants a *Container* to be rendered on a certain *Screen*?

The visualisation happens in several steps:

1. The *Renderer* calls the `write_to_screen()` method of a *Container*. This is a request to paint the layout in a rectangle of a certain size.

The *Window* object then requests the *UIControl* to create a *UIContent* instance (by calling `create_content()`). The user control receives the dimensions of the window, but can still decide to create more or less content.

Inside the `create_content()` method of *UIControl*, there are several steps:

2. First, the buffer's text is passed to the `lex_document()` method of a *Lexer*. This returns a function which for a given line number, returns a "formatted text list" for that line (that's a list of `(style_string, text)` tuples).
3. This list is passed through a list of *Processor* objects. Each processor can do a transformation for each line. (For instance, they can insert or replace some text, highlight the selection or search string, etc. ...)
4. The *UIControl* returns a *UIContent* instance which generates such a token lists for each lines.

The *Window* receives the *UIContent* and then:

5. It calculates the horizontal and vertical scrolling, if applicable (if the content would take more space than what is available).
6. The content is copied to the correct absolute position *Screen*, as requested by the *Renderer*. While doing this, the *Window* can possibly wrap the lines, if line wrapping was configured.

Note that this process is lazy: if a certain line is not displayed in the *Window*, then it is not requested from the *UIContent*. And from there, the line is not passed through the processors or even asked from the *Lexer*.

### 3.10.5 Running on top of the *asyncio* event loop

**Note:** New in prompt\_toolkit 3.0. (In prompt\_toolkit 2.0 this was possible using a work-around).

Prompt\_toolkit 3.0 uses *asyncio* natively. Calling `Application.run()` will automatically run the *asyncio* event loop.

If however you want to run a prompt\_toolkit *Application* within an *asyncio* environment, you have to call the `run_async` method, like this:

```
from prompt_toolkit.application import Application

async def main():
    # Define application.
    application = Application(
        ...
    )

    result = await application.run_async()
    print(result)

asyncio.get_event_loop().run_until_complete(main())
```

### 3.10.6 Unit testing

Testing user interfaces is not always obvious. Here are a few tricks for testing prompt\_toolkit applications.

#### *PosixPipeInput* and *DummyOutput*

During the creation of a prompt\_toolkit *Application*, we can specify what input and output device to be used. By default, these are output objects that correspond with `sys.stdin` and `sys.stdout`. In unit tests however, we want to replace these.

- For the input, we want a “pipe input”. This is an input device, in which we can programatically send some input. It can be created with `create_pipe_input()`, and that return either a `PosixPipeInput` or a `Win32PipeInput` depending on the platform.
- For the output, we want a *DummyOutput*. This is an output device that doesn’t render anything. We don’t want to render anything to `sys.stdout` in the unit tests.

**Note:** Typically, we don't want to test the bytes that are written to `sys.stdout`, because these can change any time when the rendering algorithm changes, and are not so meaningful anyway. Instead, we want to test the return value from the `Application` or test how data structures (like text buffers) change over time.

---

So we programmatically feed some input to the input pipe, have the key bindings process the input and then test what comes out of it.

In the following example we use a `PromptSession`, but the same works for any `Application`.

```
from prompt_toolkit.shortcuts import PromptSession
from prompt_toolkit.input import create_pipe_input
from prompt_toolkit.output import DummyOutput

def test_prompt_session():
    with create_pipe_input() as inp:
        inp.send_text("hello\n")
        session = PromptSession(
            input=inp,
            output=DummyOutput(),
        )

        result = session.prompt()

    assert result == "hello"
```

In the above example, don't forget to send the `\n` character to accept the prompt, otherwise the `Application` will wait forever for some more input to receive.

## Using an AppSession

Sometimes it's not convenient to pass input or output objects to the `Application`, and in some situations it's not even possible at all. This happens when these parameters are not passed down the call stack, through all function calls.

An easy way to specify which input/output to use for all applications, is by creating an `AppSession` with this input/output and running all code in that `AppSession`. This way, we don't need to inject it into every `Application` or `print_formatted_text()` call.

Here is an example where we use `create_app_session()`:

```
from prompt_toolkit.application import create_app_session
from prompt_toolkit.shortcuts import print_formatted_text
from prompt_toolkit.output import DummyOutput

def test_something():
    with create_app_session(output=DummyOutput()):
        ...
        print_formatted_text('Hello world')
        ...
```

## Pytest fixtures

In order to get rid of the boilerplate of creating the input, the `DummyOutput`, and the `AppSession`, we create a single fixture that does it for every test. Something like this:

```

import pytest
from prompt_toolkit.application import create_app_session
from prompt_toolkit.input import create_pipe_input
from prompt_toolkit.output import DummyOutput

@pytest.fixture(autouse=True, scope="function")
def mock_input():
    with create_pipe_input() as pipe_input:
        with create_app_session(input=pipe_input, output=DummyOutput()):
            yield pipe_input

```

## Type checking

Prompt\_toolkit 3.0 is fully type annotated. This means that if a prompt\_toolkit application is typed too, it can be verified with mypy. This is complementary to unit tests, but also great for testing for correctness.

### 3.10.7 Input hooks

Input hooks are a tool for inserting an external event loop into the prompt\_toolkit event loop, so that the other loop can run as long as prompt\_toolkit (actually asyncio) is idle. This is used in applications like IPython, so that GUI toolkits can display their windows while we wait at the prompt for user input.

As a consequence, we will “trampoline” back and forth between two event loops.

---

**Note:** This will use a SelectorEventLoop, not the :class: ProactorEventLoop (on Windows) due to the way the implementation works (contributions are welcome to make that work).

---

```

from prompt_toolkit.eventloop.inputhook import set_eventloop_with_inputhook

def inputhook(inputhook_context):
    # At this point, we run the other loop. This loop is supposed to run
    # until either `inputhook_context.fileno` becomes ready for reading or
    # `inputhook_context.input_is_ready()` returns True.

    # A good way is to register this file descriptor in this other event
    # loop with a callback that stops this loop when this FD becomes ready.
    # There is no need to actually read anything from the FD.

    while True:
        ...


set_eventloop_with_inputhook(inputhook)

# Any asyncio code at this point will now use this new loop, with input
# hook installed.

```

### 3.10.8 Architecture

TODO: this is a little outdated.

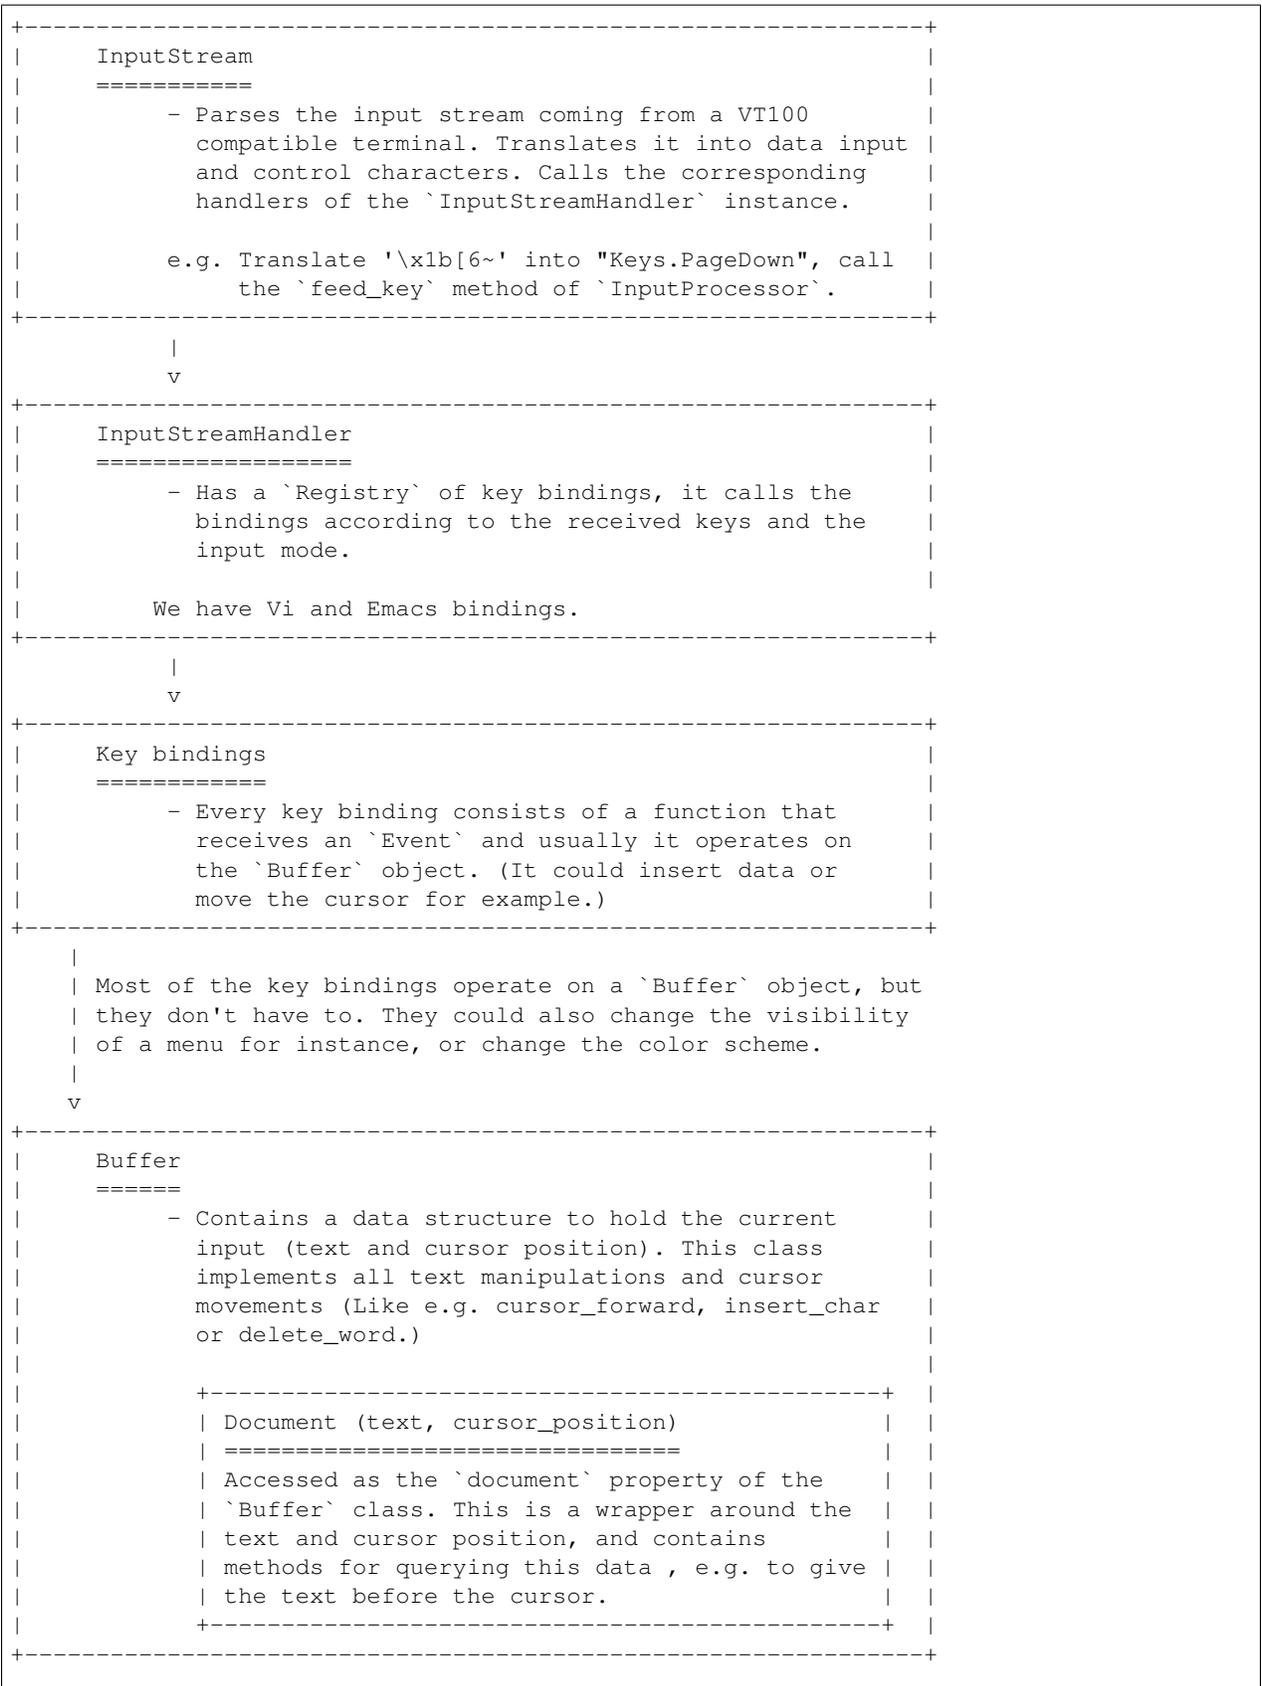

(continues on next page)

(continued from previous page)

```

|
| Normally after every key press, the output will be
| rendered again. This happens in the event loop of
| the `Application` where `Renderer.render` is called.
|
v
+-----+
| Layout                                     |
| =====                                   |
| - When the renderer should redraw, the renderer |
|   asks the layout what the output should look like. |
| - The layout operates on a `Screen` object that he |
|   received from the `Renderer` and will put the |
|   toolbars, menus, highlighted content and prompt |
|   in place.                                     |
|
|                                     +-----+
|                                     | Menus, toolbars, prompt |
|                                     | ===== |
|                                     |                                     |
|                                     +-----+
+-----+
|
|
v
+-----+
| Renderer                                   |
| =====                                   |
| - Calculates the difference between the last output |
|   and the new one and writes it to the terminal |
|   output.                                         |
+-----+

```

### 3.10.9 The rendering pipeline

This document is an attempt to describe how `prompt_toolkit` applications are rendered. It's a complex but logical process that happens more or less after every key stroke. We'll go through all the steps from the point where the user hits a key, until the character appears on the screen.

#### Waiting for user input

Most of the time when a `prompt_toolkit` application is running, it is idle. It's sitting in the event loop, waiting for some I/O to happen. The most important kind of I/O we're waiting for is user input. So, within the event loop, we have one file descriptor that represents the input device from where we receive key presses. The details are a little different between operating systems, but it comes down to a selector (like `select` or `epoll`) which waits for one or more file descriptor. The event loop is then responsible for calling the appropriate feedback when one of the file descriptors becomes ready.

It is like that when the user presses a key: the input device becomes ready for reading, and the appropriate callback is called. This is the `read_from_input` function somewhere in `application.py`. It will read the input from the `Input` object, by calling `read_keys()`.

## Reading the user input

The actual reading is also operating system dependent. For instance, on a Linux machine with a vt100 terminal, we read the input from the pseudo terminal device, by calling *os.read*. This however returns a sequence of bytes. There are two difficulties:

- The input could be UTF-8 encoded, and there is always the possibility that we receive only a portion of a multi-byte character.
- vt100 key presses consist of multiple characters. For instance the “left arrow” would generate something like `\x1b[D`. It could be that when we read this input stream, that at some point we only get the first part of such a key press, and we have to wait for the rest to arrive.

Both problems are implemented using state machines.

- The UTF-8 problem is solved using *codecs.getincrementaldecoder*, which is an object in which we can feed the incoming bytes, and it will only return the complete UTF-8 characters that we have so far. The rest is buffered for the next read operation.
- Vt100 parsing is solved by the *Vt100Parser* state machine. The state machine itself is implemented using a generator. We feed the incoming characters to the generator, and it will call the appropriate callback for key presses once they arrive. One thing here to keep in mind is that the characters for some key presses are a prefix of other key presses, like for instance, escape (`\x1b`) is a prefix of the left arrow key (`\x1b[D`). So for those, we don't know what key is pressed until more data arrives or when the input is flushed because of a timeout.

For Windows systems, it's a little different. Here we use Win32 syscalls for reading the console input.

## Processing the key presses

The *Key* objects that we receive are then passed to the *KeyProcessor* for matching against the currently registered and active key bindings.

This is another state machine, because key bindings are linked to a sequence of key presses. We cannot call the handler until all of these key presses arrive and until we're sure that this combination is not a prefix of another combination. For instance, sometimes people bind `jj` (a double `j` key press) to `esc` in Vi mode. This is convenient, but we want to make sure that pressing `j` once only, followed by a different key will still insert the `j` character as usual.

Now, there are hundreds of key bindings in *prompt\_toolkit* (in *ptpython*, right now we have 585 bindings). This is mainly caused by the way that Vi key bindings are generated. In order to make this efficient, we keep a cache of handlers which match certain sequences of keys.

Of course, key bindings also have filters attached for enabling/disabling them. So, if at some point, we get a list of handlers from that cache, we still have to discard the inactive bindings. Luckily, many bindings share exactly the same filter, and we have to check every filter only once.

*Read more about key bindings ...*

## The key handlers

Once a key sequence is matched, the handler is called. This can do things like text manipulation, changing the focus or anything else.

After the handler is called, the user interface is invalidated and rendered again.

## Rendering the user interface

The rendering is pretty complex for several reasons:

- We have to compute the dimensions of all user interface elements. Sometimes they are given, but sometimes this requires calculating the size of *UIControl* objects.
- It needs to be very efficient, because it's something that happens on every single key stroke.
- We should output as little as possible on stdout in order to reduce latency on slow network connections and older terminals.

### Calculating the total UI height

Unless the application is a full screen application, we have to know how much vertical space is going to be consumed. The total available width is given, but the vertical space is more dynamic. We do this by asking the root *Container* object to calculate its preferred height. If this is a *VSplit* or *HSplit* then this involves recursively querying the child objects for their preferred widths and heights and either summing it up, or taking maximum values depending on the actual layout. In the end, we get the preferred height, for which we make sure it's at least the distance from the cursor position to the bottom of the screen.

### Painting to the screen

Then we create a *Screen* object. This is like a canvas on which user controls can paint their content. The *write\_to\_screen()* method of the root *Container* is called with the screen dimensions. This will call recursively *write\_to\_screen()* methods of nested child containers, each time passing smaller dimensions while we traverse what is a tree of *Container* objects.

The most inner containers are *Window* objects, they will do the actual painting of the *UIControl* to the screen. This involves line wrapping the *UIControl*'s text and maybe scrolling the content horizontally or vertically.

### Rendering to stdout

Finally, when we have painted the screen, this needs to be rendered to stdout. This is done by taking the difference of the previously rendered screen and the new one. The algorithm that we have is heavily optimized to compute this difference as quickly as possible, and call the appropriate output functions of the *Output* back-end. At the end, it will position the cursor in the right place.

## 3.11 Reference

### 3.11.1 Application

```
class prompt_toolkit.application.Application(layout: Layout | None = None,
                                             style: BaseStyle | None = None,
                                             include_default_pygments_style: FilterOrBool = True,
                                             style_transformation: StyleTransformation | None = None,
                                             key_bindings: KeyBindingsBase | None = None,
                                             clipboard: Clipboard | None = None,
                                             full_screen: bool = False,
                                             color_depth: ColorDepth | Callable[[ColorDepth | None] | None = None,
                                             mouse_support: FilterOrBool = False,
                                             enable_page_navigation_bindings: None | FilterOrBool = None,
                                             paste_mode: FilterOrBool = False,
                                             editing_mode: EditingMode = <EditingMode.EMACS: 'EMACS'>,
                                             erase_when_done: bool = False,
                                             reverse_vi_search_direction: FilterOrBool = False,
                                             min_redraw_interval: float | int | None = None,
                                             max_render_postpone_time: float | int | None = 0.01,
                                             refresh_interval: float | None = None,
                                             terminal_size_polling_interval: float | None = 0.5,
                                             cursor: AnyCursorShapeConfig = None,
                                             on_reset: ApplicationEventHandler[_AppResult] | None = None,
                                             on_invalidate: ApplicationEventHandler[_AppResult] | None = None,
                                             before_render: ApplicationEventHandler[_AppResult] | None = None,
                                             after_render: ApplicationEventHandler[_AppResult] | None = None,
                                             input: Input | None = None,
                                             output: Output | None = None)
```

The main Application class! This glues everything together.

#### Parameters

- **layout** – A *Layout* instance.
- **key\_bindings** – *KeyBindingsBase* instance for the key bindings.
- **clipboard** – *Clipboard* to use.
- **full\_screen** – When True, run the application on the alternate screen buffer.
- **color\_depth** – Any *ColorDepth* value, a callable that returns a *ColorDepth* or *None* for default.
- **erase\_when\_done** – (bool) Clear the application output when it finishes.
- **reverse\_vi\_search\_direction** – Normally, in Vi mode, a ‘/’ searches forward and a ‘?’ searches backward. In Readline mode, this is usually reversed.

- **min\_redraw\_interval** – Number of seconds to wait between redraws. Use this for applications where *invalidate* is called a lot. This could cause a lot of terminal output, which some terminals are not able to process.

*None* means that every *invalidate* will be scheduled right away (which is usually fine).

When one *invalidate* is called, but a scheduled redraw of a previous *invalidate* call has not been executed yet, nothing will happen in any case.

- **max\_render\_postpone\_time** – When there is high CPU (a lot of other scheduled calls), postpone the rendering max x seconds. ‘0’ means: don’t postpone. ‘.5’ means: try to draw at least twice a second.
- **refresh\_interval** – Automatically invalidate the UI every so many seconds. When *None* (the default), only invalidate when *invalidate* has been called.
- **terminal\_size\_polling\_interval** – Poll the terminal size every so many seconds. Useful if the applications runs in a thread other than the main thread where SIG-WINCH can’t be handled, or on Windows.

Filters:

#### Parameters

- **mouse\_support** – (*Filter* or boolean). When True, enable mouse support.
- **paste\_mode** – *Filter* or boolean.
- **editing\_mode** – *EditingMode*.
- **enable\_page\_navigation\_bindings** – When *True*, enable the page navigation key bindings. These include both Emacs and Vi bindings like page-up, page-down and so on to scroll through pages. Mostly useful for creating an editor or other full screen applications. Probably, you don’t want this for the implementation of a REPL. By default, this is enabled if *full\_screen* is set.

Callbacks (all of these should accept an *Application* object as input.)

#### Parameters

- **on\_reset** – Called during reset.
- **on\_invalidate** – Called when the UI has been invalidated.
- **before\_render** – Called right before rendering.
- **after\_render** – Called right after rendering.

I/O: (Note that the preferred way to change the input/output is by creating an *AppSession* with the required input/output objects. If you need multiple applications running at the same time, you have to create a separate *AppSession* using a *with create\_app\_session()*: block.

#### Parameters

- **input** – *Input* instance.
- **output** – *Output* instance. (Probably *Vt100\_Output* or *Win32Output*.)

Usage:

```
app = Application(...) app.run()
# Or await app.run_async()
```

**cancel\_and\_wait\_for\_background\_tasks** () → None

Cancel all background tasks, and wait for the cancellation to complete. If any of the background tasks raised an exception, this will also propagate the exception.

(If we had nurseries like Trio, this would be the `__aexit__` of a nursery.)

**color\_depth**

The active *ColorDepth*.

The current value is determined as follows:

- If a color depth was given explicitly to this application, use that value.
- Otherwise, fall back to the color depth that is reported by the *Output* implementation. If the *Output* class was created using `output.defaults.create_output`, then this value is coming from the `$PROMPT_TOOLKIT_COLOR_DEPTH` environment variable.

**cpr\_not\_supported\_callback** () → None

Called when we don't receive the cursor position response in time.

**create\_background\_task** (*coroutine*: *Coroutine*[Any, Any, None]) → `asyncio.Task`[None]

Start a background task (coroutine) for the running application. When the *Application* terminates, unfinished background tasks will be cancelled.

Given that we still support Python versions before 3.11, we can't use task groups (and exception groups), because of that, these background tasks are not allowed to raise exceptions. If they do, we'll call the default exception handler from the event loop.

If at some point, we have Python 3.11 as the minimum supported Python version, then we can use a *TaskGroup* (with the lifetime of `Application.run_async()`, and run the background tasks in there.

This is not threadsafe.

**current\_buffer**

The currently focused *Buffer*.

(This returns a dummy *Buffer* when none of the actual buffers has the focus. In this case, it's really not practical to check for *None* values or catch exceptions every time.)

**current\_search\_state**

Return the current *SearchState*. (The one for the focused *BufferControl*.)

**exit** (*result*: *AppResult* | None = None, *exception*: *BaseException* | *type*[*BaseException*] | None = None, *style*: *str* = "") → None

Exit application.

---

**Note:** If `Application.exit` is called before `Application.run()` is called, then the *Application* won't exit (because the `Application.future` doesn't correspond to the current run). Use a `pre_run` hook and an event to synchronize the closing if there's a chance this can happen.

---

### Parameters

- **result** – Set this result for the application.
- **exception** – Set this exception as the result for an application. For a prompt, this is often `EOFError` or `KeyboardInterrupt`.
- **style** – Apply this style on the whole content when quitting, often this is 'class:exiting' for a prompt. (Used when `erase_when_done` is not set.)

**get\_used\_style\_strings** () → list[str]

Return a list of used style strings. This is helpful for debugging, and for writing a new *Style*.

**invalidate** () → None

Thread safe way of sending a repaint trigger to the input event loop.

**invalidated**

True when a redraw operation has been scheduled.

**is\_running**

True when the application is currently active/running.

**key\_processor = None**

The *InputProcessor* instance.

**print\_text** (text: AnyFormattedText, style: BaseStyle | None = None) → None

Print a list of (style\_str, text) tuples to the output. (When the UI is running, this method has to be called through *run\_in\_terminal*, otherwise it will destroy the UI.)

#### Parameters

- **text** – List of (style\_str, text) tuples.
- **style** – Style class to use. Defaults to the active style in the CLI.

**quoted\_insert = None**

Quoted insert. This flag is set if we go into quoted insert mode.

**render\_counter = None**

Render counter. This one is increased every time the UI is rendered. It can be used as a key for caching certain information during one rendering.

**reset** () → None

Reset everything, for reading the next input.

**run** (pre\_run: Callable[[], None] | None = None, set\_exception\_handler: bool = True, handle\_sigint: bool = True, in\_thread: bool = False) → \_AppResult

A blocking ‘run’ call that waits until the UI is finished.

This will start the current asyncio event loop. If no loop is set for the current thread, then it will create a new loop. If a new loop was created, this won’t close the new loop (if *in\_thread=False*).

#### Parameters

- **pre\_run** – Optional callable, which is called right after the “reset” of the application.
- **set\_exception\_handler** – When set, in case of an exception, go out of the alternate screen and hide the application, display the exception, and wait for the user to press ENTER.
- **in\_thread** – When true, run the application in a background thread, and block the current thread until the application terminates. This is useful if we need to be sure the application won’t use the current event loop (asyncio does not support nested event loops). A new event loop will be created in this background thread, and that loop will also be closed when the background thread terminates. When this is used, it’s especially important to make sure that all asyncio background tasks are managed through *get\_app().create\_background\_task()*, so that unfinished tasks are properly cancelled before the event loop is closed. This is used for instance in ptython.
- **handle\_sigint** – Handle SIGINT signal. Call the key binding for *Keys.SIGINT*. (This only works in the main thread.)

**run\_async** (*pre\_run*: Callable[[], None] | None = None, *set\_exception\_handler*: bool = True, *handle\_sigint*: bool = True, *slow\_callback\_duration*: float = 0.5) → \_AppResult

Run the prompt\_toolkit *Application* until *exit()* has been called. Return the value that was passed to *exit()*.

This is the main entry point for a prompt\_toolkit *Application* and usually the only place where the event loop is actually running.

#### Parameters

- **pre\_run** – Optional callable, which is called right after the “reset” of the application.
- **set\_exception\_handler** – When set, in case of an exception, go out of the alternate screen and hide the application, display the exception, and wait for the user to press ENTER.
- **handle\_sigint** – Handle SIGINT signal if possible. This will call the *<sigint>* key binding when a SIGINT is received. (This only works in the main thread.)
- **slow\_callback\_duration** – Display warnings if code scheduled in the asyncio event loop takes more time than this. The asyncio default of *0.1* is sometimes not sufficient on a slow system, because exceptionally, the drawing of the app, which happens in the event loop, can take a bit longer from time to time.

**run\_system\_command** (*command*: str, *wait\_for\_enter*: bool = True, *display\_before\_text*: Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt\_toolkit.mouse\_events.MouseEvent], NotImplementedOrNone]]], Callable[[], Any], None] = "", *wait\_text*: str = 'Press ENTER to continue...') → None

Run system command (While hiding the prompt. When finished, all the output will scroll above the prompt.)

#### Parameters

- **command** – Shell command to be executed.
- **wait\_for\_enter** – Wait for the user to press enter, when the command is finished.
- **display\_before\_text** – If given, text to be displayed before the command executes.

**Returns** A *Future* object.

**suspend\_to\_background** (*suspend\_group*: bool = True) → None

(Not thread safe – to be called from inside the key bindings.) Suspend process.

**Parameters** **suspend\_group** – When true, suspend the whole process group. (This is the default, and probably what you want.)

**timeoutlen = None**

Like Vim’s *timeoutlen* option. This can be *None* or a float. For instance, suppose that we have a key binding AB and a second key binding A. If the user presses A and then waits, we don’t handle this binding yet (unless it was marked ‘eager’), because we don’t know what will follow. This timeout is the maximum amount of time that we wait until we call the handlers anyway. Pass *None* to disable this timeout.

**ttimeoutlen = None**

When to flush the input (For flushing escape keys.) This is important on terminals that use vt100 input. We can’t distinguish the escape key from for instance the left-arrow key, if we don’t know what follows after “x1b”. This little timer will consider “x1b” to be escape if nothing did follow in this time span. This seems to work like the *timeoutlen* option in Vim.

**vi\_state = None**

Vi state. (For Vi key bindings.)

`prompt_toolkit.application.get_app()` → `Application[Any]`

Get the current active (running) `Application`. An `Application` is active during the `Application.run_async()` call.

We assume that there can only be one `Application` active at the same time. There is only one terminal window, with only one stdin and stdout. This makes the code significantly easier than passing around the `Application` everywhere.

If no `Application` is running, then return by default a `DummyApplication`. For practical reasons, we prefer to not raise an exception. This way, we don't have to check all over the place whether an actual `Application` was returned.

(For applications like `pymux` where we can have more than one `Application`, we'll use a work-around to handle that.)

`prompt_toolkit.application.get_app_or_none()` → `Application[Any] | None`

Get the current active (running) `Application`, or return `None` if no application is running.

`prompt_toolkit.application.set_app(app: Application[Any])` → `Generator[(None, None, None)]`

Context manager that sets the given `Application` active in an `AppSession`.

This should only be called by the `Application` itself. The application will automatically be active while its running. If you want the application to be active in other threads/coroutines, where that's not the case, use `contextvars.copy_context()`, or use `Application.context` to run it in the appropriate context.

`prompt_toolkit.application.create_app_session(input: Input | None = None, output: Output | None = None)` → `Generator[AppSession, None, None]`

Create a separate `AppSession`.

This is useful if there can be multiple individual 'AppSession's going on. Like in the case of an Telnet/SSH server. This functionality uses `contextvars` and requires at least Python 3.7.

**class** `prompt_toolkit.application.AppSession` (`input: Input | None = None, output: Output | None = None`)

An `AppSession` is an interactive session, usually connected to one terminal. Within one such session, interaction with many applications can happen, one after the other.

The input/output device is not supposed to change during one session.

Warning: Always use the `create_app_session` function to create an instance, so that it gets activated correctly.

#### Parameters

- **input** – Use this as a default input for all applications running in this session, unless an input is passed to the `Application` explicitly.
- **output** – Use this as a default output.

**class** `prompt_toolkit.application.DummyApplication`

When no `Application` is running, `get_app()` will run an instance of this `DummyApplication` instead.

`prompt_toolkit.application.in_terminal(render_cli_done: bool = False)` → `AsyncGenerator[None, None]`

Asynchronous context manager that suspends the current application and runs the body in the terminal.

```

async def f():
    async with in_terminal():
        call_some_function()
        await call_some_async_function()

```

```
prompt_toolkit.application.run_in_terminal (func: Callable[[], _T], render_cli_done: bool
                                          = False, in_executor: bool = False) → Awaitable[_T]
```

Run function on the terminal above the current application or prompt.

What this does is first hiding the prompt, then running this callable (which can safely output to the terminal), and then again rendering the prompt which causes the output of this function to scroll above the prompt.

func is supposed to be a synchronous function. If you need an asynchronous version of this function, use the `in_terminal` context manager directly.

#### Parameters

- **func** – The callable to execute.
- **render\_cli\_done** – When True, render the interface in the ‘Done’ state first, then execute the function. If False, erase the interface first.
- **in\_executor** – When True, run in executor. (Use this for long blocking functions, when you don’t want to block the event loop.)

**Returns** A *Future*.

### 3.11.2 Formatted text

Many places in `prompt_toolkit` can take either plain text, or formatted text. For instance the `prompt()` function takes either plain text or formatted text for the prompt. The `FormattedTextControl` can also take either plain text or formatted text.

In any case, there is an input that can either be just plain text (a string), an `HTML` object, an `ANSI` object or a sequence of `(style_string, text)` tuples. The `to_formatted_text()` conversion function takes any of these and turns all of them into such a tuple sequence.

```
prompt_toolkit.formatted_text.to_formatted_text (value: Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str], Callable[[prompt_toolkit.mouse_events.MouseEvent], NotImplementedOrNone]]], Callable[[], Any], None], style: str = "", auto_convert: bool = False) → prompt_toolkit.formatted_text.base.FormattedText
```

Convert the given value (which can be formatted text) into a list of text fragments. (Which is the canonical form of formatted text.) The outcome is always a `FormattedText` instance, which is a list of `(style, text)` tuples.

It can take a plain text string, an `HTML` or `ANSI` object, anything that implements `__pt_formatted_text__` or a callable that takes no arguments and returns one of those.

#### Parameters

- **style** – An additional style string which is applied to all text fragments.
- **auto\_convert** – If `True`, also accept other types, and convert them to a string first.

```
prompt_toolkit.formatted_text.is_formatted_text (value: object) → TypeGuard[AnyFormattedText]
```

Check whether the input is valid formatted text (for use in assert statements). In case of a callable, it doesn’t check the return type.

```
class prompt_toolkit.formatted_text.Template (text: str)
```

Template for string interpolation with formatted text.

Example:

```
Template(' ... {} ... ').format(HTML(...))
```

**Parameters** `text` – Plain text.

```
prompt_toolkit.formatted_text.merge_formatted_text (items: Iterable[Union[str,
MagicFormattedText,
List[Union[Tuple[str,
str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
NotImplementedOrNone]]],
Callable[[], Any], None]])
→ Union[str, MagicFormattedText,
List[Union[Tuple[str,
str], Tuple[str, str,
Callable[[prompt_toolkit.mouse_events.MouseEvent],
NotImplementedOrNone]]],
Callable[[], Any], None]
```

Merge (Concatenate) several pieces of formatted text together.

**class** `prompt_toolkit.formatted_text.FormattedText`  
A list of (style, text) tuples.

(In some situations, this can also be (style, text, mouse\_handler) tuples.)

**class** `prompt_toolkit.formatted_text.HTML` (value: str)  
HTML formatted text. Take something HTML-like, for use as a formatted string.

```
# Turn something into red.
HTML('<style fg="ansired" bg="#00ff44">...</style>')

# Italic, bold, underline and strike.
HTML('<i>...</i>')
HTML('<b>...</b>')
HTML('<u>...</u>')
HTML('<s>...</s>')
```

All HTML elements become available as a “class” in the style sheet. E.g. `<username>...</username>` can be styled, by setting a style for `username`.

**format** (\*args, \*\*kwargs) → `prompt_toolkit.formatted_text.html.HTML`  
Like `str.format`, but make sure that the arguments are properly escaped.

**class** `prompt_toolkit.formatted_text.ANSI` (value: str)  
ANSI formatted text. Take something ANSI escaped text, for use as a formatted string. E.g.

```
ANSI('\x1b[31mhello \x1b[32mworld')
```

Characters between `\001` and `\002` are supposed to have a zero width when printed, but these are literally sent to the terminal output. This can be used for instance, for inserting Final Term prompt commands. They will be translated into a `prompt_toolkit` ‘[ZeroWidthEscape]’ fragment.

**format** (\*args, \*\*kwargs) → `prompt_toolkit.formatted_text.ansi.ANSI`  
Like `str.format`, but make sure that the arguments are properly escaped. (No ANSI escapes can be injected.)

**class** `prompt_toolkit.formatted_text.PygmentsTokens` (token\_list: list[tuple[Token, str]])  
Turn a pygments token list into a list of `prompt_toolkit` text fragments ((style\_str, text) tuples).

```
prompt_toolkit.formatted_text.fragment_list_len (fragments: List[Union[Tuple[str,
                                                                    str],
                                                                    Tuple[str,
                                                                    str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    NotImplementedOrNone]]]]) → int
```

Return the amount of characters in this text fragment list.

**Parameters fragments** – List of (style\_str, text) or (style\_str, text, mouse\_handler) tuples.

```
prompt_toolkit.formatted_text.fragment_list_width (fragments: List[Union[Tuple[str,
                                                                    str],
                                                                    Tuple[str,
                                                                    str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    NotImplementedOrNone]]]]) →
                                                                    int
```

Return the character width of this text fragment list. (Take double width characters into account.)

**Parameters fragments** – List of (style\_str, text) or (style\_str, text, mouse\_handler) tuples.

```
prompt_toolkit.formatted_text.fragment_list_to_text (fragments: List[Union[Tuple[str,
                                                                    str],
                                                                    Tuple[str,
                                                                    str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    NotImplementedOrNone]]]]) →
                                                                    str
```

Concatenate all the text parts again.

**Parameters fragments** – List of (style\_str, text) or (style\_str, text, mouse\_handler) tuples.

```
prompt_toolkit.formatted_text.split_lines (fragments: List[Union[Tuple[str,
                                                                    str],
                                                                    Tuple[str,
                                                                    str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    NotImplementedOrNone]]]]) →
                                                                    Iterable[List[Union[Tuple[str, str],
                                                                    Tuple[str, str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    NotImplementedOrNone]]]]]
```

Take a single list of (style\_str, text) tuples and yield one such list for each line. Just like str.split, this will yield at least one item.

**Parameters fragments** – List of (style\_str, text) or (style\_str, text, mouse\_handler) tuples.

```
prompt_toolkit.formatted_text.to_plain_text (value: Union[str, MagicFormattedText,
                                                                    List[Union[Tuple[str, str],
                                                                    Tuple[str, str,
                                                                    Callable[[prompt_toolkit.mouse_events.MouseEvent],
                                                                    NotImplementedOrNone]]]],
                                                                    Callable[[],
                                                                    Any], None]) → str
```

Turn any kind of formatted text back into plain text.

### 3.11.3 Buffer

Data structures for the Buffer. It holds the text, cursor position, history, etc...

**exception** prompt\_toolkit.buffer.**EditReadOnlyBuffer**  
 Attempt editing of read-only *Buffer*.

```
class prompt_toolkit.buffer.Buffer (completer: Completer | None = None, auto_suggest: AutoSuggest | None = None, history: History | None = None, validator: Validator | None = None, tempfile_suffix: str | Callable[[], str] = "", tempfile: str | Callable[[], str] = "", name: str = "", complete_while_typing: FilterOrBool = False, validate_while_typing: FilterOrBool = False, enable_history_search: FilterOrBool = False, document: Document | None = None, accept_handler: BufferAcceptHandler | None = None, read_only: FilterOrBool = False, multiline: FilterOrBool = True, on_text_changed: BufferEventHandler | None = None, on_text_insert: BufferEventHandler | None = None, on_cursor_position_changed: BufferEventHandler | None = None, on_completions_changed: BufferEventHandler | None = None, on_suggestion_set: BufferEventHandler | None = None)
```

The core data structure that holds the text and cursor position of the current input line and implements all text manipulations on top of it. It also implements the history, undo stack and the completion state.

#### Parameters

- **completer** – *Completer* instance.
- **history** – *History* instance.
- **tempfile\_suffix** – The tempfile suffix (extension) to be used for the “open in editor” function. For a Python REPL, this would be “.py”, so that the editor knows the syntax highlighting to use. This can also be a callable that returns a string.
- **tempfile** – For more advanced tempfile situations where you need control over the subdirectories and filename. For a Git Commit Message, this would be “.git/COMMIT\_EDITMSG”, so that the editor knows the syntax highlighting to use. This can also be a callable that returns a string.
- **name** – Name for this buffer. E.g. DEFAULT\_BUFFER. This is mostly useful for key bindings where we sometimes prefer to refer to a buffer by their name instead of by reference.
- **accept\_handler** – Called when the buffer input is accepted. (Usually when the user presses *enter*.) The accept handler receives this *Buffer* as input and should return True when the buffer text should be kept instead of calling reset.

In case of a *PromptSession* for instance, we want to keep the text, because we will exit the application, and only reset it during the next run.

Events:

#### Parameters

- **on\_text\_changed** – When the buffer text changes. (Callable or None.)
- **on\_text\_insert** – When new text is inserted. (Callable or None.)
- **on\_cursor\_position\_changed** – When the cursor moves. (Callable or None.)
- **on\_completions\_changed** – When the completions were changed. (Callable or None.)
- **on\_suggestion\_set** – When an auto-suggestion text has been set. (Callable or None.)

Filters:

#### Parameters

- **complete\_while\_typing** – *Filter* or *bool*. Decide whether or not to do asynchronous autocompleting while typing.
- **validate\_while\_typing** – *Filter* or *bool*. Decide whether or not to do asynchronous validation while typing.
- **enable\_history\_search** – *Filter* or *bool* to indicate when up-arrow partial string matching is enabled. It is advised to not enable this at the same time as *complete\_while\_typing*, because when there is an autocompletion found, the up arrows usually browse through the completions, rather than through the history.
- **read\_only** – *Filter*. When True, changes will not be allowed.
- **multiline** – *Filter* or *bool*. When not set, pressing *Enter* will call the *accept\_handler*. Otherwise, pressing *Esc-Enter* is required.

**append\_to\_history** () → None

Append the current input to the history.

**apply\_completion** (*completion*: *prompt\_toolkit.completion.base.Completion*) → None

Insert a given completion.

**apply\_search** (*search\_state*: *prompt\_toolkit.search.SearchState*, *include\_current\_position*: *bool* = True, *count*: *int* = 1) → None

Apply search. If something is found, set *working\_index* and *cursor\_position*.

**auto\_down** (*count*: *int* = 1, *go\_to\_start\_of\_line\_if\_history\_changes*: *bool* = False) → None

If we're not on the last line (of a multiline input) go a line down, otherwise go forward in history. (If nothing is selected.)

**auto\_up** (*count*: *int* = 1, *go\_to\_start\_of\_line\_if\_history\_changes*: *bool* = False) → None

If we're not on the first line (of a multiline input) go a line up, otherwise go back in history. (If nothing is selected.)

**cancel\_completion** () → None

Cancel completion, go back to the original text.

**complete\_next** (*count*: *int* = 1, *disable\_wrap\_around*: *bool* = False) → None

Browse to the next completions. (Does nothing if there are no completion.)

**complete\_previous** (*count*: *int* = 1, *disable\_wrap\_around*: *bool* = False) → None

Browse to the previous completions. (Does nothing if there are no completion.)

**copy\_selection** (*\_cut*: *bool* = False) → *prompt\_toolkit.clipboard.base.ClipboardData*

Copy selected text and return *ClipboardData* instance.

Notice that this doesn't store the copied data on the clipboard yet. You can store it like this:

```
data = buffer.copy_selection()
get_app().clipboard.set_data(data)
```

**cursor\_down** (*count*: *int* = 1) → None

(for multiline edit). Move cursor to the next line.

**cursor\_up** (*count*: *int* = 1) → None

(for multiline edit). Move cursor to the previous line.

**cut\_selection** () → *prompt\_toolkit.clipboard.base.ClipboardData*

Delete selected text and return *ClipboardData* instance.

**delete** (*count*: *int* = 1) → str

Delete specified number of characters and Return the deleted text.

**delete\_before\_cursor** (*count: int = 1*) → str

Delete specified number of characters before cursor and return the deleted text.

**document**

Return *Document* instance from the current text, cursor position and selection state.

**document\_for\_search** (*search\_state: prompt\_toolkit.search.SearchState*) → *prompt\_toolkit.document.Document*

Return a *Document* instance that has the text/cursor position for this search, if we would apply it. This will be used in the *BufferControl* to display feedback while searching.

**get\_search\_position** (*search\_state: prompt\_toolkit.search.SearchState, include\_current\_position: bool = True, count: int = 1*) → int

Get the cursor position for this search. (This operation won't change the *working\_index*. It's won't go through the history. Vi text objects can't span multiple items.)

**go\_to\_completion** (*index: int | None*) → None

Select a completion from the list of current completions.

**go\_to\_history** (*index: int*) → None

Go to this item in the history.

**history\_backward** (*count: int = 1*) → None

Move backwards through history.

**history\_forward** (*count: int = 1*) → None

Move forwards through the history.

**Parameters count** – Amount of items to move forward.

**insert\_line\_above** (*copy\_margin: bool = True*) → None

Insert a new line above the current one.

**insert\_line\_below** (*copy\_margin: bool = True*) → None

Insert a new line below the current one.

**insert\_text** (*data: str, overwrite: bool = False, move\_cursor: bool = True, fire\_event: bool = True*) → None

Insert characters at cursor position.

**Parameters fire\_event** – Fire *on\_text\_insert* event. This is mainly used to trigger auto-completion while typing.

**is\_returnable**

True when there is something handling accept.

**join\_next\_line** (*separator: str = ''*) → None

Join the next line to the current one by deleting the line ending after the current line.

**join\_selected\_lines** (*separator: str = ''*) → None

Join the selected lines.

**load\_history\_if\_not\_yet\_loaded**() → None

Create task for populating the buffer history (if not yet done).

Note:

This needs to be called from within the event loop of the application, because history loading is async, and we need to be sure the right event loop is active. Therefore, we call this method in the ``BufferControl.create_content``.

There are situations where `prompt_toolkit` applications are created

(continues on next page)

(continued from previous page)

in one thread, but will later run in a different thread (Ptython is one example. The REPL runs in a separate thread, in order to prevent interfering with a potential different event loop in the main thread. The REPL UI however is still created in the main thread.) We could decide to not support creating `prompt_toolkit` objects in one thread and running the application in a different thread, but history loading is the only place where it matters, and this solves it.

**newline** (*copy\_margin: bool = True*) → None

Insert a line ending at the current position.

**open\_in\_editor** (*validate\_and\_handle: bool = False*) → `asyncio.Task[None]`

Open code in editor.

This returns a future, and runs in a thread executor.

**paste\_clipboard\_data** (*data: prompt\_toolkit.clipboard.base.ClipboardData, paste\_mode: prompt\_toolkit.selection.PasteMode = <PasteMode.EMACS: 'EMACS'>, count: int = 1*) → None

Insert the data from the clipboard.

**reset** (*document: Document | None = None, append\_to\_history: bool = False*) → None

**Parameters append\_to\_history** – Append current input to history first.

**save\_to\_undo\_stack** (*clear\_redo\_stack: bool = True*) → None

Safe current state (input text and cursor position), so that we can restore it by calling `undo`.

**set\_document** (*value: prompt\_toolkit.document.Document, bypass\_readonly: bool = False*) → None

Set `Document` instance. Like the `document` property, but accept an `bypass_readonly` argument.

**Parameters bypass\_readonly** – When True, don't raise an `EditReadOnlyBuffer` exception, even when the buffer is read-only.

**Warning:** When this buffer is read-only and `bypass_readonly` was not passed, the `EditReadOnlyBuffer` exception will be caught by the `KeyProcessor` and is silently suppressed. This is important to keep in mind when writing key bindings, because it won't do what you expect, and there won't be a stack trace. Use `try/finally` around this function if you need some cleanup code.

**start\_completion** (*select\_first: bool = False, select\_last: bool = False, insert\_common\_part: bool = False, complete\_event: CompleteEvent | None = None*) → None

Start asynchronous autocompletion of this buffer. (This will do nothing if a previous completion was still in progress.)

**start\_history\_lines\_completion** () → None

Start a completion based on all the other lines in the document and the history.

**start\_selection** (*selection\_type: prompt\_toolkit.selection.SelectionType = <Selection-Type.CHARACTERS: 'CHARACTERS'>*) → None

Take the current cursor position as the start of this selection.

**swap\_characters\_before\_cursor** () → None

Swap the last two characters before the cursor.

**transform\_current\_line** (*transform\_callback: Callable[[str], str]*) → None

Apply the given transformation function to the current line.

**Parameters transform\_callback** – callable that takes a string and return a new string.

**transform\_lines** (*line\_index\_iterator*: Iterable[int], *transform\_callback*: Callable[[str], str]) →

str  
Transforms the text on a range of lines. When the iterator yield an index not in the range of lines that the document contains, it skips them silently.

To uppercase some lines:

```
new_text = transform_lines(range(5,10), lambda text: text.upper())
```

#### Parameters

- **line\_index\_iterator** – Iterator of line numbers (int)
- **transform\_callback** – callable that takes the original text of a line, and return the new text for this line.

**Returns** The new text.

**transform\_region** (*from\_*: int, *to*: int, *transform\_callback*: Callable[[str], str]) → None

Transform a part of the input string.

#### Parameters

- **from** – (int) start position.
- **to** – (int) end position.
- **transform\_callback** – Callable which accepts a string and returns the transformed string.

**validate** (*set\_cursor*: bool = False) → bool

Returns *True* if valid.

**Parameters** **set\_cursor** – Set the cursor position, if an error was found.

**validate\_and\_handle** () → None

Validate buffer and handle the accept action.

**yank\_last\_arg** (*n*: int | None = None) → None

Like *yank\_nth\_arg*, but if no argument has been given, yank the last word by default.

**yank\_nth\_arg** (*n*: int | None = None, *\_yank\_last\_arg*: bool = False) → None

Pick *n*th word from previous history entry (depending on current *yank\_nth\_arg\_state*) and insert it at current position. Rotate through history if called repeatedly. If no *n* has been given, take the first argument. (The second word.)

**Parameters** **n** – (None or int), The index of the word from the previous line to take.

**class** prompt\_toolkit.buffer.**CompletionState** (*original\_document*: Document, *completions*: list[Completion] | None = None, *complete\_index*: int | None = None)

Immutable class that contains a completion state.

**complete\_index** = None

Position in the *completions* array. This can be *None* to indicate “no completion”, the original text.

**completions** = None

List of all the current Completion instances which are possible at this point.

**current\_completion**

Return the current completion, or return *None* when no completion is selected.

**go\_to\_index** (*index: int | None*) → None  
Create a new *CompletionState* object with the new index.

When *index* is *None* deselect the completion.

**new\_text\_and\_position** () → tuple[str, int]  
Return (new\_text, new\_cursor\_position) for this completion.

**original\_document = None**  
Document as it was when the completion started.

`prompt_toolkit.buffer.indent` (*buffer: prompt\_toolkit.buffer.Buffer, from\_row: int, to\_row: int, count: int = 1*) → None  
Indent text of a *Buffer* object.

`prompt_toolkit.buffer.unindent` (*buffer: prompt\_toolkit.buffer.Buffer, from\_row: int, to\_row: int, count: int = 1*) → None  
Unindent text of a *Buffer* object.

`prompt_toolkit.buffer.reshape_text` (*buffer: prompt\_toolkit.buffer.Buffer, from\_row: int, to\_row: int*) → None  
Reformat text, taking the width into account. *to\_row* is included. (Vi 'gq' operator.)

### 3.11.4 Selection

Data structures for the selection.

**class** `prompt_toolkit.selection.SelectionType`  
Type of selection.

**BLOCK** = 'BLOCK'  
A block selection. (Visual-Block in Vi.)

**CHARACTERS** = 'CHARACTERS'  
Characters. (Visual in Vi.)

**LINES** = 'LINES'  
Whole lines. (Visual-Line in Vi.)

**class** `prompt_toolkit.selection.PasteMode`  
An enumeration.

**class** `prompt_toolkit.selection.SelectionState` (*original\_cursor\_position: int = 0, type: prompt\_toolkit.selection.SelectionType = <SelectionType.CHARACTERS: 'CHARACTERS'>*)  
State of the current selection.

#### Parameters

- **original\_cursor\_position** – int
- **type** – *SelectionType*

### 3.11.5 Clipboard

**class** `prompt_toolkit.clipboard.Clipboard`  
Abstract baseclass for clipboards. (An implementation can be in memory, it can share the X11 or Windows keyboard, or can be persistent.)

**get\_data** () → `prompt_toolkit.clipboard.base.ClipboardData`  
Return clipboard data.

**rotate** () → `None`  
For Emacs mode, rotate the kill ring.

**set\_data** (*data*: `prompt_toolkit.clipboard.base.ClipboardData`) → `None`  
Set data to the clipboard.

**Parameters** *data* – `ClipboardData` instance.

**set\_text** (*text*: `str`) → `None`  
Shortcut for setting plain text on clipboard.

```
class prompt_toolkit.clipboard.ClipboardData (text: str = "", type:
prompt_toolkit.selection.SelectionType
= <SelectionType.CHARACTERS: 'CHARACTERS'>)
```

Text on the clipboard.

#### Parameters

- **text** – string
- **type** – `SelectionType`

```
class prompt_toolkit.clipboard.DummyClipboard
Clipboard implementation that doesn't remember anything.
```

```
class prompt_toolkit.clipboard.DynamicClipboard (get_clipboard: Callable[[], Clipboard
| None])
Clipboard class that can dynamically returns any Clipboard.
```

**Parameters** *get\_clipboard* – Callable that returns a `Clipboard` instance.

```
class prompt_toolkit.clipboard.InMemoryClipboard (data: ClipboardData | None = None,
max_size: int = 60)
```

Default clipboard implementation. Just keep the data in memory.

This implements a kill-ring, for Emacs mode.

```
class prompt_toolkit.clipboard.pyperclip.PyperclipClipboard
Clipboard that synchronizes with the Windows/Mac/Linux system clipboard, using the pyperclip module.
```

### 3.11.6 Auto completion

```
class prompt_toolkit.completion.Completion (text: str, start_position: int = 0, display: Any-
FormattedText | None = None, display_meta:
AnyFormattedText | None = None, style: str =
"", selected_style: str = "")
```

#### Parameters

- **text** – The new string that will be inserted into the document.
- **start\_position** – Position relative to the `cursor_position` where the new text will start. The text will be inserted between the `start_position` and the original cursor position.
- **display** – (optional string or formatted text) If the completion has to be displayed differently in the completion menu.

- **display\_meta** – (Optional string or formatted text) Meta information about the completion, e.g. the path or source where it’s coming from. This can also be a callable that returns a string.
- **style** – Style string.
- **selected\_style** – Style string, used for a selected completion. This can override the *style* parameter.

**display\_meta**

Return meta-text. (This is lazy when using a callable).

**display\_meta\_text**

The ‘meta’ field as plain text.

**display\_text**

The ‘display’ field as plain text.

**new\_completion\_from\_position** (*position: int*) → `prompt_toolkit.completion.base.Completion`  
(Only for internal use!) Get a new completion by splitting this one. Used by *Application* when it needs to have a list of new completions after inserting the common prefix.

**class** `prompt_toolkit.completion.Completer`

Base class for completer implementations.

**get\_completions** (*document: prompt\_toolkit.document.Document, complete\_event: prompt\_toolkit.completion.base.CompleteEvent*) → `Iterable[prompt_toolkit.completion.base.Completion]`

This should be a generator that yields *Completion* instances.

If the generation of completions is something expensive (that takes a lot of time), consider wrapping this *Completer* class in a *ThreadedCompleter*. In that case, the completer algorithm runs in a background thread and completions will be displayed as soon as they arrive.

**Parameters**

- **document** – *Document* instance.
- **complete\_event** – *CompleteEvent* instance.

**get\_completions\_async** (*document: prompt\_toolkit.document.Document, complete\_event: prompt\_toolkit.completion.base.CompleteEvent*) → `AsyncGenerator[prompt_toolkit.completion.base.Completion, None]`

Asynchronous generator for completions. (Probably, you won’t have to override this.)

Asynchronous generator of *Completion* objects.

**class** `prompt_toolkit.completion.ThreadedCompleter` (*completer: prompt\_toolkit.completion.base.Completer*)

Wrapper that runs the *get\_completions* generator in a thread.

(Use this to prevent the user interface from becoming unresponsive if the generation of completions takes too much time.)

The completions will be displayed as soon as they are produced. The user can already select a completion, even if not all completions are displayed.

**get\_completions\_async** (*document: prompt\_toolkit.document.Document, complete\_event: prompt\_toolkit.completion.base.CompleteEvent*) → `AsyncGenerator[prompt_toolkit.completion.base.Completion, None]`

Asynchronous generator of completions.

**class** `prompt_toolkit.completion.DummyCompleter`

A completer that doesn’t return any completion.

```
class prompt_toolkit.completion.DynamicCompleter (get_completer: Callable[[], Completer | None])
```

Completer class that can dynamically returns any Completer.

**Parameters** **get\_completer** – Callable that returns a *Completer* instance.

```
class prompt_toolkit.completion.CompleteEvent (text_inserted: bool = False, completion_requested: bool = False)
```

Event that called the completer.

**Parameters**

- **text\_inserted** – When True, it means that completions are requested because of a text insert. (*Buffer.complete\_while\_typing*.)
- **completion\_requested** – When True, it means that the user explicitly pressed the *Tab* key in order to view the completions.

These two flags can be used for instance to implement a completer that shows some completions when *Tab* has been pressed, but not automatically when the user presses a space. (Because of *complete\_while\_typing*.)

**completion\_requested = None**

Used explicitly requested completion by pressing ‘tab’.

**text\_inserted = None**

Automatic completion while typing.

```
class prompt_toolkit.completion.ConditionalCompleter (completer: prompt_toolkit.completion.base.Completer, filter: Union[prompt_toolkit.filters.base.Filter, bool])
```

Wrapper around any other completer that will enable/disable the completions depending on whether the received condition is satisfied.

**Parameters**

- **completer** – *Completer* instance.
- **filter** – *Filter* instance.

```
prompt_toolkit.completion.merge_completers (completers: Sequence[prompt_toolkit.completion.base.Completer], deduplicate: bool = False) → prompt_toolkit.completion.base.Completer
```

Combine several completers into one.

**Parameters** **deduplicate** – If *True*, wrap the result in a *DeduplicateCompleter* so that completions that would result in the same text will be deduplicated.

```
prompt_toolkit.completion.get_common_complete_suffix (document: prompt_toolkit.document.Document, completions: Sequence[prompt_toolkit.completion.base.Completion]) → str
```

Return the common prefix for all completions.

```
class prompt_toolkit.completion.PathCompleter (only_directories: bool = False, get_paths: Callable[[], list[str]] | None = None, file_filter: Callable[[str], bool] | None = None, min_input_len: int = 0, expanduser: bool = False)
```

Complete for Path variables.

### Parameters

- **get\_paths** – Callable which returns a list of directories to look into when the user enters a relative path.
- **file\_filter** – Callable which takes a filename and returns whether this file should show up in the completion. `None` when no filtering has to be done.
- **min\_input\_len** – Don't do autocompletion when the input string is shorter.

**class** `prompt_toolkit.completion.ExecutableCompleter`  
Complete only executable files in the current path.

**class** `prompt_toolkit.completion.FuzzyCompleter` (*completer: Completer, WORD: bool = False, pattern: str | None = None, enable\_fuzzy: FilterOrBool = True*)

Fuzzy completion. This wraps any other completer and turns it into a fuzzy completer.

If the list of words is: ["leopard", "gorilla", "dinosaur", "cat", "bee"] Then trying to complete "oar" would yield "leopard" and "dinosaur", but not the others, because they match the regular expression 'o.\*a.\*r'. Similar, in another application "djm" could expand to "django\_migrations".

The results are sorted by relevance, which is defined as the start position and the length of the match.

Notice that this is not really a tool to work around spelling mistakes, like what would be possible with `difflib`. The purpose is rather to have a quicker or more intuitive way to filter the given completions, especially when many completions have a common prefix.

Fuzzy algorithm is based on this post: <https://blog.amjith.com/fuzzyfinder-in-10-lines-of-python>

### Parameters

- **completer** – A `Completer` instance.
- **WORD** – When True, use WORD characters.
- **pattern** – Regex pattern which selects the characters before the cursor that are considered for the fuzzy matching.
- **enable\_fuzzy** – (bool or `Filter`) Enabled the fuzzy behavior. For easily turning fuzzy-ness on or off according to a certain condition.

**class** `prompt_toolkit.completion.FuzzyWordCompleter` (*words: list[str] | Callable[[], list[str]], meta\_dict: dict[str, str] | None = None, WORD: bool = False*)

Fuzzy completion on a list of words.

(This is basically a `WordCompleter` wrapped in a `FuzzyCompleter`.)

### Parameters

- **words** – List of words or callable that returns a list of words.
- **meta\_dict** – Optional dict mapping words to their meta-information.
- **WORD** – When True, use WORD characters.

**class** `prompt_toolkit.completion.NestedCompleter` (*options: dict[str, Completer | None], ignore\_case: bool = True*)

Completer which wraps around several other completers, and calls any the one that corresponds with the first word of the input.

By combining multiple `NestedCompleter` instances, we can achieve multiple hierarchical levels of autocompletion. This is useful when `WordCompleter` is not sufficient.

If you need multiple levels, check out the `from_nested_dict` classmethod.

```
classmethod from_nested_dict (data: Mapping[str, Union[Any, Set[str], None,
                                prompt_toolkit.completion.base.Completer]]) →
                                prompt_toolkit.completion.nested.NestedCompleter
```

Create a `NestedCompleter`, starting from a nested dictionary data structure, like this:

```
data = {
    'show': {
        'version': None,
        'interfaces': None,
        'clock': None,
        'ip': {'interface': {'brief'}}
    },
    'exit': None
    'enable': None
}
```

The value should be `None` if there is no further completion at some point. If all values in the dictionary are `None`, it is also possible to use a set instead.

Values in this data structure can be a completers as well.

```
class prompt_toolkit.completion.WordCompleter (words: list[str] | Callable[[], list[str]],
                                                ignore_case: bool = False, display_dict:
                                                Mapping[str, AnyFormattedText] | None
                                                = None, meta_dict: Mapping[str, Any-
                                                FormattedText] | None = None, WORD:
                                                bool = False, sentence: bool = False,
                                                match_middle: bool = False, pattern: Pat-
                                                tern[str] | None = None)
```

Simple autocompletion on a list of words.

#### Parameters

- **words** – List of words or callable that returns a list of words.
- **ignore\_case** – If True, case-insensitive completion.
- **meta\_dict** – Optional dict mapping words to their meta-text. (This should map strings to strings or formatted text.)
- **WORD** – When True, use WORD characters.
- **sentence** – When True, don't complete by comparing the word before the cursor, but by comparing all the text before the cursor. In this case, the list of words is just a list of strings, where each string can contain spaces. (Can not be used together with the WORD option.)
- **match\_middle** – When True, match not only the start, but also in the middle of the word.
- **pattern** – Optional compiled regex for finding the word before the cursor to complete. When given, use this regex pattern instead of default one (see `document.FIND_WORD_RE`)

```
class prompt_toolkit.completion.DeduplicateCompleter (completer:
                                                        prompt_toolkit.completion.base.Completer)
```

Wrapper around a completer that removes duplicates. Only the first unique completions are kept.

Completions are considered to be a duplicate if they result in the same document text when they would be applied.

### 3.11.7 Document

The *Document* that implements all the text operations/querying.

```
class prompt_toolkit.document.Document (text: str = "", cursor_position: int | None = None,  
                                         selection: SelectionState | None = None)
```

This is an immutable class around the text and cursor position, and contains methods for querying this data, e.g. to give the text before the cursor.

This class is usually instantiated by a *Buffer* object, and accessed as the *document* property of that class.

#### Parameters

- **text** – string
- **cursor\_position** – int
- **selection** – *SelectionState*

#### **char\_before\_cursor**

Return character before the cursor or an empty string.

#### **current\_char**

Return character under cursor or an empty string.

#### **current\_line**

Return the text on the line where the cursor is. (when the input consists of just one line, it equals *text*.)

#### **current\_line\_after\_cursor**

Text from the cursor until the end of the line.

#### **current\_line\_before\_cursor**

Text from the start of the line until the cursor.

#### **cursor\_position**

The document cursor position.

#### **cursor\_position\_col**

Current column. (0-based.)

#### **cursor\_position\_row**

Current row. (0-based.)

#### **cut\_selection** () → tuple[Document, ClipboardData]

Return a (*Document*, *ClipboardData*) tuple, where the document represents the new document when the selection is cut, and the clipboard data, represents whatever has to be put on the clipboard.

#### **empty\_line\_count\_at\_the\_end** () → int

Return number of empty lines at the end of the document.

#### **end\_of\_paragraph** (count: int = 1, after: bool = False) → int

Return the end of the current paragraph. (Relative cursor position.)

#### **find** (sub: str, in\_current\_line: bool = False, include\_current\_position: bool = False, ignore\_case: bool = False, count: int = 1) → int | None

Find *text* after the cursor, return position relative to the cursor position. Return *None* if nothing was found.

**Parameters** **count** – Find the n-th occurrence.

#### **find\_all** (sub: str, ignore\_case: bool = False) → list[int]

Find all occurrences of the substring. Return a list of absolute positions in the document.

**find\_backwards** (*sub: str, in\_current\_line: bool = False, ignore\_case: bool = False, count: int = 1*)  
 → int | None  
 Find *text* before the cursor, return position relative to the cursor position. Return *None* if nothing was found.

**Parameters** *count* – Find the *n*-th occurrence.

**find\_boundaries\_of\_current\_word** (*WORD: bool = False, include\_leading\_whitespace: bool = False, include\_trailing\_whitespace: bool = False*) → tuple[int, int]  
 Return the relative boundaries (startpos, endpos) of the current word under the cursor. (This is at the current line, because line boundaries obviously don't belong to any word.) If not on a word, this returns (0,0)

**find\_enclosing\_bracket\_left** (*left\_ch: str, right\_ch: str, start\_pos: int | None = None*) → int | None  
 Find the left bracket enclosing current position. Return the relative position to the cursor position.  
 When *start\_pos* is given, don't look past the position.

**find\_enclosing\_bracket\_right** (*left\_ch: str, right\_ch: str, end\_pos: int | None = None*) → int | None  
 Find the right bracket enclosing current position. Return the relative position to the cursor position.  
 When *end\_pos* is given, don't look past the position.

**find\_matching\_bracket\_position** (*start\_pos: int | None = None, end\_pos: int | None = None*) → int  
 Return relative cursor position of matching [, (, { or < bracket.  
 When *start\_pos* or *end\_pos* are given. Don't look past the positions.

**find\_next\_matching\_line** (*match\_func: Callable[[str], bool], count: int = 1*) → int | None  
 Look downwards for empty lines. Return the line index, relative to the current line.

**find\_next\_word\_beginning** (*count: int = 1, WORD: bool = False*) → int | None  
 Return an index relative to the cursor position pointing to the start of the next word. Return *None* if nothing was found.

**find\_next\_word\_ending** (*include\_current\_position: bool = False, count: int = 1, WORD: bool = False*) → int | None  
 Return an index relative to the cursor position pointing to the end of the next word. Return *None* if nothing was found.

**find\_previous\_matching\_line** (*match\_func: Callable[[str], bool], count: int = 1*) → int | None  
 Look upwards for empty lines. Return the line index, relative to the current line.

**find\_previous\_word\_beginning** (*count: int = 1, WORD: bool = False*) → int | None  
 Return an index relative to the cursor position pointing to the start of the previous word. Return *None* if nothing was found.

**find\_previous\_word\_ending** (*count: int = 1, WORD: bool = False*) → int | None  
 Return an index relative to the cursor position pointing to the end of the previous word. Return *None* if nothing was found.

**find\_start\_of\_previous\_word** (*count: int = 1, WORD: bool = False, pattern: Pattern[str] | None = None*) → int | None  
 Return an index relative to the cursor position pointing to the start of the previous word. Return *None* if nothing was found.

**Parameters** *pattern* – (None or compiled regex). When given, use this regex pattern.

**get\_column\_cursor\_position** (*column: int*) → int  
Return the relative cursor position for this column at the current line. (It will stay between the boundaries of the line in case of a larger number.)

**get\_cursor\_down\_position** (*count: int = 1, preferred\_column: int | None = None*) → int  
Return the relative cursor position (character index) where we would be if the user pressed the arrow-down button.

**Parameters preferred\_column** – When given, go to this column instead of staying at the current column.

**get\_cursor\_left\_position** (*count: int = 1*) → int  
Relative position for cursor left.

**get\_cursor\_right\_position** (*count: int = 1*) → int  
Relative position for cursor\_right.

**get\_cursor\_up\_position** (*count: int = 1, preferred\_column: int | None = None*) → int  
Return the relative cursor position (character index) where we would be if the user pressed the arrow-up button.

**Parameters preferred\_column** – When given, go to this column instead of staying at the current column.

**get\_end\_of\_document\_position** () → int  
Relative position for the end of the document.

**get\_end\_of\_line\_position** () → int  
Relative position for the end of this line.

**get\_start\_of\_document\_position** () → int  
Relative position for the start of the document.

**get\_start\_of\_line\_position** (*after\_whitespace: bool = False*) → int  
Relative position for the start of this line.

**get\_word\_before\_cursor** (*WORD: bool = False, pattern: Pattern[str] | None = None*) → str  
Give the word before the cursor. If we have whitespace before the cursor this returns an empty string.

**Parameters pattern** – (None or compiled regex). When given, use this regex pattern.

**get\_word\_under\_cursor** (*WORD: bool = False*) → str  
Return the word, currently below the cursor. This returns an empty string when the cursor is on a whitespace region.

**has\_match\_at\_current\_position** (*sub: str*) → bool  
*True* when this substring is found at the cursor position.

**insert\_after** (*text: str*) → prompt\_toolkit.document.Document  
Create a new document, with this text inserted after the buffer. It keeps selection ranges and cursor position in sync.

**insert\_before** (*text: str*) → prompt\_toolkit.document.Document  
Create a new document, with this text inserted before the buffer. It keeps selection ranges and cursor position in sync.

**is\_cursor\_at\_the\_end**  
*True* when the cursor is at the end of the text.

**is\_cursor\_at\_the\_end\_of\_line**  
*True* when the cursor is at the end of this line.

**last\_non\_blank\_of\_current\_line\_position** () → int

Relative position for the last non blank character of this line.

**leading\_whitespace\_in\_current\_line**

The leading whitespace in the left margin of the current line.

**line\_count**

Return the number of lines in this document. If the document ends with a trailing n, that counts as the beginning of a new line.

**lines**

Array of all the lines.

**lines\_from\_current**

Array of the lines starting from the current line, until the last line.

**on\_first\_line**

True when we are at the first line.

**on\_last\_line**

True when we are at the last line.

**paste\_clipboard\_data** (*data*: `prompt_toolkit.clipboard.base.ClipboardData`, *paste\_mode*: `prompt_toolkit.selection.PasteMode = <PasteMode.EMACS: 'EMACS'>`, *count*: `int = 1`) → `prompt_toolkit.document.Document`

Return a new `Document` instance which contains the result if we would paste this data at the current cursor position.

#### Parameters

- **paste\_mode** – Where to paste. (Before/after/emacs.)
- **count** – When >1, Paste multiple times.

**selection**

`SelectionState` object.

**selection\_range** () → `tuple[int, int]`

Return (from, to) tuple of the selection. start and end position are included.

This doesn't take the selection type into account. Use `selection_ranges` instead.

**selection\_range\_at\_line** (*row*: `int`) → `tuple[int, int] | None`

If the selection spans a portion of the given line, return a (from, to) tuple.

The returned upper boundary is not included in the selection, so (0, 0) is an empty selection. (0, 1), is a one character selection.

Returns None if the selection doesn't cover this line at all.

**selection\_ranges** () → `Iterable[tuple[int, int]]`

Return a list of (from, to) tuples for the selection or none if nothing was selected. The upper boundary is not included.

This will yield several (from, to) tuples in case of a BLOCK selection. This will return zero ranges, like (8,8) for empty lines in a block selection.

**start\_of\_paragraph** (*count*: `int = 1`, *before*: `bool = False`) → int

Return the start of the current paragraph. (Relative cursor position.)

**text**

The document text.

**translate\_index\_to\_position** (*index*: `int`) → `tuple[int, int]`

Given an index for the text, return the corresponding (row, col) tuple. (0-based. Returns (0, 0) for index=0.)

**translate\_row\_col\_to\_index** (*row: int, col: int*) → int  
Given a (row, col) tuple, return the corresponding index. (Row and col params are 0-based.)  
Negative row/col values are turned into zero.

### 3.11.8 Enums

`prompt_toolkit.enums.DEFAULT_BUFFER = 'DEFAULT_BUFFER'`  
Name of the default buffer.

**class** `prompt_toolkit.enums.EditingMode`  
An enumeration.

`prompt_toolkit.enums.SEARCH_BUFFER = 'SEARCH_BUFFER'`  
Name of the search buffer.

`prompt_toolkit.enums.SYSTEM_BUFFER = 'SYSTEM_BUFFER'`  
Name of the system buffer.

### 3.11.9 History

Implementations for the history of a *Buffer*.

**NOTE: There is no *DynamicHistory*:** This doesn't work well, because the *Buffer* needs to be able to attach an event handler to the event when a history entry is loaded. This loading can be done asynchronously and making the history swappable would probably break this.

**class** `prompt_toolkit.history.History`  
Base History class.

This also includes abstract methods for loading/storing history.

**append\_string** (*string: str*) → None  
Add string to the history.

**get\_strings** () → list[str]  
Get the strings from the history that are loaded so far. (In order. Oldest item first.)

**load** () → AsyncGenerator[str, None]  
Load the history and yield all the entries in reverse order (latest, most recent history entry first).

This method can be called multiple times from the *Buffer* to repopulate the history when prompting for a new input. So we are responsible here for both caching, and making sure that strings that were appended to the history will be incorporated next time this method is called.

**load\_history\_strings** () → Iterable[str]  
This should be a generator that yields *str* instances.

It should yield the most recent items first, because they are the most important. (The history can already be used, even when it's only partially loaded.)

**store\_string** (*string: str*) → None  
Store the string in persistent storage.

**class** `prompt_toolkit.history.ThreadedHistory` (*history: prompt\_toolkit.history.History*)  
Wrapper around *History* implementations that run the *load()* generator in a thread.

Use this to increase the start-up time of `prompt_toolkit` applications. History entries are available as soon as they are loaded. We don't have to wait for everything to be loaded.

`load()` → AsyncGenerator[str, None]

Like `History.load()`, but call `'self.load_history_strings()' in a background thread.`

**class** `prompt_toolkit.history.DummyHistory`

*History* object that doesn't remember anything.

**class** `prompt_toolkit.history.FileHistory` (*filename: str*)

*History* class that stores all strings in a file.

**class** `prompt_toolkit.history.InMemoryHistory` (*history\_strings: Sequence[str] | None = None*)

*History* class that keeps a list of all strings in memory.

In order to prepopulate the history, it's possible to call either `append_string` for all items or pass a list of strings to `__init__` here.

### 3.11.10 Keys

**class** `prompt_toolkit.keys.Keys`

List of keys for use in key bindings.

Note that this is an "StrEnum", all values can be compared against strings.

### 3.11.11 Style

Styling for `prompt_toolkit` applications.

**class** `prompt_toolkit.styles.Attrs` (*color, bgcolor, bold, underline, strike, italic, blink, reverse, hidden*)

**bgcolor**

Alias for field number 1

**blink**

Alias for field number 6

**bold**

Alias for field number 2

**color**

Alias for field number 0

**hidden**

Alias for field number 8

**italic**

Alias for field number 5

**reverse**

Alias for field number 7

**strike**

Alias for field number 4

**underline**

Alias for field number 3

**class** `prompt_toolkit.styles.BaseStyle`

Abstract base class for `prompt_toolkit` styles.

```
get_attrs_for_style_str (style_str: str, default: prompt_toolkit.styles.base.Attrs = Attrs(color="", bgcolor="", bold=False, underline=False, strike=False, italic=False, blink=False, reverse=False, hidden=False)) → prompt_toolkit.styles.base.Attrs
```

Return *Attrs* for the given style string.

#### Parameters

- **style\_str** – The style string. This can contain inline styling as well as classnames (e.g. “class:title”).
- **default** – *Attrs* to be used if no styling was defined.

```
invalidation_hash () → Hashable
```

Invalidation hash for the style. When this changes over time, the renderer knows that something in the style changed, and that everything has to be redrawn.

#### style\_rules

The list of style rules, used to create this style. (Required for *DynamicStyle* and *\_MergedStyle* to work.)

```
class prompt_toolkit.styles.DummyStyle
```

A style that doesn’t style anything.

```
class prompt_toolkit.styles.DynamicStyle (get_style: Callable[[], BaseStyle | None])
```

Style class that can dynamically returns an other *Style*.

**Parameters** **get\_style** – Callable that returns a *Style* instance.

```
class prompt_toolkit.styles.Style (style_rules: list[tuple[str, str]])
```

Create a *Style* instance from a list of style rules.

The *style\_rules* is supposed to be a list of (‘classnames’, ‘style’) tuples. The classnames are a whitespace separated string of class names and the style string is just like a Pygments style definition, but with a few additions: it supports ‘reverse’ and ‘blink’.

Later rules always override previous rules.

Usage:

```
Style([
    ('title', '#ff0000 bold underline'),
    ('something-else', 'reverse'),
    ('class1 class2', 'reverse'),
])
```

The *from\_dict* classmethod is similar, but takes a dictionary as input.

```
classmethod from_dict (style_dict: dict[str, str], priority: Priority = <Priority.DICT_KEY_ORDER: 'KEY_ORDER'>) → Style
```

#### Parameters

- **style\_dict** – Style dictionary.
- **priority** – *Priority* value.

```
get_attrs_for_style_str (style_str: str, default: prompt_toolkit.styles.base.Attrs = Attrs(color="", bgcolor="", bold=False, underline=False, strike=False, italic=False, blink=False, reverse=False, hidden=False)) → prompt_toolkit.styles.base.Attrs
```

Get *Attrs* for the given style string.

```
class prompt_toolkit.styles.Priority
```

The priority of the rules, when a style is created from a dictionary.

In a *Style*, rules that are defined later will always override previous defined rules, however in a dictionary, the key order was arbitrary before Python 3.6. This means that the style could change at random between rules.

We have two options:

- **DICT\_KEY\_ORDER:** This means, iterate through the dictionary, and take the key/value pairs in order as they come. This is a good option if you have Python >3.6. Rules at the end will override rules at the beginning.
- **MOST\_PRECISE:** keys that are defined with most precision will get higher priority. (More precise means: more elements.)

`prompt_toolkit.styles.merge_styles(styles: list[BaseStyle]) → _MergedStyle`  
Merge multiple *Style* objects.

`prompt_toolkit.styles.style_from_pygments_cls(pygments_style_cls: type[PygmentsStyle]) → Style`  
Shortcut to create a *Style* instance from a Pygments style class and a style dictionary.

Example:

```
from prompt_toolkit.styles.from_pygments import style_from_pygments_cls
from pygments.styles import get_style_by_name
style = style_from_pygments_cls(get_style_by_name('monokai'))
```

**Parameters** `pygments_style_cls` – Pygments style class to start from.

`prompt_toolkit.styles.style_from_pygments_dict(pygments_dict: dict[Token, str]) → Style`  
Create a *Style* instance from a Pygments style dictionary. (One that maps Token objects to style strings.)

`prompt_toolkit.styles.pygments_token_to_classname(token: Token) → str`  
Turn e.g. `Token.Name.Exception` into `'pygments.name.exception'`.

(Our Pygments lexer will also turn the tokens that pygments produces in a `prompt_toolkit` list of fragments that match these styling rules.)

**class** `prompt_toolkit.styles.StyleTransformation`

Base class for any style transformation.

**invalidation\_hash** () → Hashable  
When this changes, the cache should be invalidated.

**transform\_attrs** (attrs: `prompt_toolkit.styles.base.Attrs`) → `prompt_toolkit.styles.base.Attrs`  
Take an *Attrs* object and return a new *Attrs* object.

Remember that the color formats can be either “ansi. . .” or a 6 digit lowercase hexadecimal color (without ‘#’ prefix).

**class** `prompt_toolkit.styles.SwapLightAndDarkStyleTransformation`

Turn dark colors into light colors and the other way around.

This is meant to make color schemes that work on a dark background usable on a light background (and the other way around).

Notice that this doesn’t swap foreground and background like “reverse” does. It turns light green into dark green and the other way around. Foreground and background colors are considered individually.

Also notice that when `<reverse>` is used somewhere and no colors are given in particular (like what is the default for the bottom toolbar), then this doesn’t change anything. This is what makes sense, because when the ‘default’ color is chosen, it’s what works best for the terminal, and reverse works good with that.

**transform\_attrs** (*attrs*: *prompt\_toolkit.styles.base.Attrs*) → *prompt\_toolkit.styles.base.Attrs*  
Return the *Attrs* used when opposite luminosity should be used.

```
class prompt_toolkit.styles.AdjustBrightnessStyleTransformation (min_brightness:  
    Union[Callable[[],  
    float], float]  
    = 0.0,  
    max_brightness:  
    Union[Callable[[],  
    float], float] =  
    1.0)
```

Adjust the brightness to improve the rendering on either dark or light backgrounds.

For dark backgrounds, it's best to increase *min\_brightness*. For light backgrounds it's best to decrease *max\_brightness*. Usually, only one setting is adjusted.

This will only change the brightness for text that has a foreground color defined, but no background color. It works best for 256 or true color output.

---

**Note:** Notice that there is no universal way to detect whether the application is running in a light or dark terminal. As a developer of a command line application, you'll have to make this configurable for the user.

---

#### Parameters

- **min\_brightness** – Float between 0.0 and 1.0 or a callable that returns a float.
- **max\_brightness** – Float between 0.0 and 1.0 or a callable that returns a float.

```
prompt_toolkit.styles.merge_style_transformations (style_transformations:  
    Sequence[prompt_toolkit.styles.style_transformation.StyleTransformation]  
    → prompt_toolkit.styles.style_transformation.StyleTransformation)
```

Merge multiple transformations together.

```
class prompt_toolkit.styles.DummyStyleTransformation  
    Don't transform anything at all.
```

```
class prompt_toolkit.styles.ConditionalStyleTransformation (style_transformation:  
    prompt_toolkit.styles.style_transformation.StyleTransformation,  
    filter:  
    Union[prompt_toolkit.filters.base.Filter,  
    bool])
```

Apply the style transformation depending on a condition.

```
class prompt_toolkit.styles.DynamicStyleTransformation (get_style_transformation:  
    Callable[[], StyleTransformation | None])
```

StyleTransformation class that can dynamically returns any *StyleTransformation*.

**Parameters** **get\_style\_transformation** – Callable that returns a *StyleTransformation* instance.

### 3.11.12 Shortcuts

`prompt_toolkit.shortcuts.prompt` (*message: AnyFormattedText | None = None*, \*, *history: History | None = None*, *editing\_mode: EditingMode | None = None*, *refresh\_interval: float | None = None*, *vi\_mode: bool | None = None*, *lexer: Lexer | None = None*, *completer: Completer | None = None*, *complete\_in\_thread: bool | None = None*, *is\_password: bool | None = None*, *key\_bindings: KeyBindingsBase | None = None*, *bottom\_toolbar: AnyFormattedText | None = None*, *style: BaseStyle | None = None*, *color\_depth: ColorDepth | None = None*, *cursor: AnyCursorShapeConfig | None = None*, *include\_default\_pygments\_style: FilterOrBool | None = None*, *style\_transformation: StyleTransformation | None = None*, *swap\_light\_and\_dark\_colors: FilterOrBool | None = None*, *rprompt: AnyFormattedText | None = None*, *multiline: FilterOrBool | None = None*, *prompt\_continuation: PromptContinuationText | None = None*, *wrap\_lines: FilterOrBool | None = None*, *enable\_history\_search: FilterOrBool | None = None*, *search\_ignore\_case: FilterOrBool | None = None*, *complete\_while\_typing: FilterOrBool | None = None*, *validate\_while\_typing: FilterOrBool | None = None*, *complete\_style: CompleteStyle | None = None*, *auto\_suggest: AutoSuggest | None = None*, *validator: Validator | None = None*, *clipboard: Clipboard | None = None*, *mouse\_support: FilterOrBool | None = None*, *input\_processors: list[Processor] | None = None*, *placeholder: AnyFormattedText | None = None*, *reserve\_space\_for\_menu: int | None = None*, *enable\_system\_prompt: FilterOrBool | None = None*, *enable\_suspend: FilterOrBool | None = None*, *enable\_open\_in\_editor: FilterOrBool | None = None*, *tempfile\_suffix: str | Callable[[], str] | None = None*, *tempfile: str | Callable[[], str] | None = None*, *in\_thread: bool = False*, *default: str = ""*, *accept\_default: bool = False*, *pre\_run: Callable[[], None] | None = None*) → str

Display the prompt.

The first set of arguments is a subset of the `PromptSession` class itself. For these, passing in `None` will keep the current values that are active in the session. Passing in a value will set the attribute for the session, which means that it applies to the current, but also to the next prompts.

Note that in order to erase a `Completer`, `Validator` or `AutoSuggest`, you can't use `None`. Instead pass in a `DummyCompleter`, `DummyValidator` or `DummyAutoSuggest` instance respectively. For a `Lexer` you can pass in an empty `SimpleLexer`.

Additional arguments, specific for this prompt:

#### Parameters

- **default** – The default input text to be shown. (This can be edited by the user).
- **accept\_default** – When `True`, automatically accept the default value without allowing the user to edit the input.
- **pre\_run** – Callable, called at the start of `Application.run`.
- **in\_thread** – Run the prompt in a background thread; block the current thread. This avoids interference with an event loop in the current thread. Like `Application.run(in_thread=True)`.

This method will raise `KeyboardInterrupt` when control-c has been pressed (for abort) and `EOFError` when control-d has been pressed (for exit).

```
class prompt_toolkit.shortcuts.PromptSession(message: AnyFormattedText = "", *, multiline: FilterOrBool = False, wrap_lines: FilterOrBool = True, is_password: FilterOrBool = False, vi_mode: bool = False, editing_mode: EditingMode = <EditingMode.EMACS: 'EMACS'>, complete_while_typing: FilterOrBool = True, validate_while_typing: FilterOrBool = True, enable_history_search: FilterOrBool = False, search_ignore_case: FilterOrBool = False, lexer: Lexer | None = None, enable_system_prompt: FilterOrBool = False, enable_suspend: FilterOrBool = False, enable_open_in_editor: FilterOrBool = False, validator: Validator | None = None, completer: Completer | None = None, complete_in_thread: bool = False, reserve_space_for_menu: int = 8, complete_style: CompleteStyle = <CompleteStyle.COLUMN: 'COLUMN'>, auto_suggest: AutoSuggest | None = None, style: BaseStyle | None = None, style_transformation: StyleTransformation | None = None, swap_light_and_dark_colors: FilterOrBool = False, color_depth: ColorDepth | None = None, cursor: AnyCursorShapeConfig = None, include_default_pygments_style: FilterOrBool = True, history: History | None = None, clipboard: Clipboard | None = None, prompt_continuation: PromptContinuationText | None = None, rprompt: AnyFormattedText = None, bottom_toolbar: AnyFormattedText = None, mouse_support: FilterOrBool = False, input_processors: list[Processor] | None = None, placeholder: AnyFormattedText | None = None, key_bindings: KeyBindingsBase | None = None, erase_when_done: bool = False, tempfile_suffix: str | Callable[[], str] | None = '.txt', tempfile: str | Callable[[], str] | None = None, refresh_interval: float = 0, input: Input | None = None, output: Output | None = None)
```

`PromptSession` for a prompt application, which can be used as a GNU Readline replacement.

This is a wrapper around a lot of `prompt_toolkit` functionality and can be a replacement for `raw_input`.

All parameters that expect “formatted text” can take either just plain text (a unicode object), a list of `(style_str, text)` tuples or an HTML object.

Example usage:

```
s = PromptSession(message='>')
text = s.prompt()
```

### Parameters

- **message** – Plain text or formatted text to be shown before the prompt. This can also be a callable that returns formatted text.
- **multiline** – *bool* or *Filter*. When True, prefer a layout that is more adapted for multiline input. Text after newlines is automatically indented, and search/arg input is shown below the input, instead of replacing the prompt.
- **wrap\_lines** – *bool* or *Filter*. When True (the default), automatically wrap long lines instead of scrolling horizontally.
- **is\_password** – Show asterisks instead of the actual typed characters.
- **editing\_mode** – `EditMode.VI` or `EditMode.EMACS`.
- **vi\_mode** – *bool*, if True, identical to `editing_mode=EditMode.VI`.
- **complete\_while\_typing** – *bool* or *Filter*. Enable autocompletion while typing.
- **validate\_while\_typing** – *bool* or *Filter*. Enable input validation while typing.
- **enable\_history\_search** – *bool* or *Filter*. Enable up-arrow parting string matching.
- **search\_ignore\_case** – *Filter*. Search case insensitive.
- **lexer** – *Lexer* to be used for the syntax highlighting.
- **validator** – *Validator* instance for input validation.
- **completer** – *Completer* instance for input completion.
- **complete\_in\_thread** – *bool* or *Filter*. Run the completer code in a background thread in order to avoid blocking the user interface. For `CompleteStyle.READLINE_LIKE`, this setting has no effect. There we always run the completions in the main thread.
- **reserve\_space\_for\_menu** – Space to be reserved for displaying the menu. (0 means that no space needs to be reserved.)
- **auto\_suggest** – *AutoSuggest* instance for input suggestions.
- **style** – *Style* instance for the color scheme.
- **include\_default\_pygments\_style** – *bool* or *Filter*. Tell whether the default styling for Pygments lexers has to be included. By default, this is true, but it is recommended to be disabled if another Pygments style is passed as the *style* argument, otherwise, two Pygments styles will be merged.
- **style\_transformation** – *StyleTransformation* instance.
- **swap\_light\_and\_dark\_colors** – *bool* or *Filter*. When enabled, apply `SwapLightAndDarkStyleTransformation`. This is useful for switching between dark and light terminal backgrounds.
- **enable\_system\_prompt** – *bool* or *Filter*. Pressing `Meta+!` will show a system prompt.
- **enable\_suspend** – *bool* or *Filter*. Enable Control-Z style suspension.

- **enable\_open\_in\_editor** – *bool* or *Filter*. Pressing ‘v’ in Vi mode or C-X C-E in emacs mode will open an external editor.
- **history** – *History* instance.
- **clipboard** – *Clipboard* instance. (e.g. *InMemoryClipboard*)
- **rprompt** – Text or formatted text to be displayed on the right side. This can also be a callable that returns (formatted) text.
- **bottom\_toolbar** – Formatted text or callable which is supposed to return formatted text.
- **prompt\_continuation** – Text that needs to be displayed for a multiline prompt continuation. This can either be formatted text or a callable that takes a *prompt\_width*, *line\_number* and *wrap\_count* as input and returns formatted text. When this is *None* (the default), then *prompt\_width* spaces will be used.
- **complete\_style** – *CompleteStyle.COLUMN*, *CompleteStyle.MULTI\_COLUMN* or *CompleteStyle.READLINE\_LIKE*.
- **mouse\_support** – *bool* or *Filter* to enable mouse support.
- **placeholder** – Text to be displayed when no input has been given yet. Unlike the *default* parameter, this won’t be returned as part of the output ever. This can be formatted text or a callable that returns formatted text.
- **refresh\_interval** – (number; in seconds) When given, refresh the UI every so many seconds.
- **input** – *Input* object. (Note that the preferred way to change the input/output is by creating an *AppSession*.)
- **output** – *Output* object.

**prompt** (*message: AnyFormattedText | None = None*, *\**, *editing\_mode: EditingMode | None = None*, *refresh\_interval: float | None = None*, *vi\_mode: bool | None = None*, *lexer: Lexer | None = None*, *completer: Completer | None = None*, *complete\_in\_thread: bool | None = None*, *is\_password: bool | None = None*, *key\_bindings: KeyBindingsBase | None = None*, *bottom\_toolbar: AnyFormattedText | None = None*, *style: BaseStyle | None = None*, *color\_depth: ColorDepth | None = None*, *cursor: AnyCursorShapeConfig | None = None*, *include\_default\_pygments\_style: FilterOrBool | None = None*, *style\_transformation: StyleTransformation | None = None*, *swap\_light\_and\_dark\_colors: FilterOrBool | None = None*, *rprompt: AnyFormattedText | None = None*, *multiline: FilterOrBool | None = None*, *prompt\_continuation: PromptContinuationText | None = None*, *wrap\_lines: FilterOrBool | None = None*, *enable\_history\_search: FilterOrBool | None = None*, *search\_ignore\_case: FilterOrBool | None = None*, *complete\_while\_typing: FilterOrBool | None = None*, *validate\_while\_typing: FilterOrBool | None = None*, *complete\_style: CompleteStyle | None = None*, *auto\_suggest: AutoSuggest | None = None*, *validator: Validator | None = None*, *clipboard: Clipboard | None = None*, *mouse\_support: FilterOrBool | None = None*, *input\_processors: list[Processor] | None = None*, *placeholder: AnyFormattedText | None = None*, *reserve\_space\_for\_menu: int | None = None*, *enable\_system\_prompt: FilterOrBool | None = None*, *enable\_suspend: FilterOrBool | None = None*, *enable\_open\_in\_editor: FilterOrBool | None = None*, *tempfile\_suffix: str | Callable[[], str] | None = None*, *tempfile: str | Callable[[], str] | None = None*, *default: str | Document = ”*, *accept\_default: bool = False*, *pre\_run: Callable[[], None] | None = None*, *set\_exception\_handler: bool = True*, *handle\_sigint: bool = True*, *in\_thread: bool = False*) → *\_T*

Display the prompt.

The first set of arguments is a subset of the *PromptSession* class itself. For these, passing in *None* will keep the current values that are active in the session. Passing in a value will set the attribute for the session, which means that it applies to the current, but also to the next prompts.

Note that in order to erase a `Completer`, `Validator` or `AutoSuggest`, you can't use `None`. Instead pass in a `DummyCompleter`, `DummyValidator` or `DummyAutoSuggest` instance respectively. For a `Lexer` you can pass in an empty `SimpleLexer`.

Additional arguments, specific for this prompt:

### Parameters

- **default** – The default input text to be shown. (This can be edited by the user).
- **accept\_default** – When `True`, automatically accept the default value without allowing the user to edit the input.
- **pre\_run** – Callable, called at the start of `Application.run`.
- **in\_thread** – Run the prompt in a background thread; block the current thread. This avoids interference with an event loop in the current thread. Like `Application.run(in_thread=True)`.

This method will raise `KeyboardInterrupt` when control-c has been pressed (for abort) and `EOFError` when control-d has been pressed (for exit).

`prompt_toolkit.shortcuts.confirm(message: str = 'Confirm?', suffix: str = '(y/n)') → bool`  
Display a confirmation prompt that returns `True/False`.

**class** `prompt_toolkit.shortcuts.CompleteStyle`  
How to display autocompletions for the prompt.

`prompt_toolkit.shortcuts.create_confirm_session(message: str, suffix: str = '(y/n)') → prompt_toolkit.shortcuts.prompt.PromptSession[bool][bool]`  
Create a `PromptSession` object for the 'confirm' function.

`prompt_toolkit.shortcuts.clear()` → `None`  
Clear the screen.

`prompt_toolkit.shortcuts.clear_title()` → `None`  
Erase the current title.

`prompt_toolkit.shortcuts.print_formatted_text(*values, sep: str = ' ', end: str = '\n', file: TextIO | None = None, flush: bool = False, style: BaseStyle | None = None, output: Output | None = None, color_depth: ColorDepth | None = None, style_transformation: StyleTransformation | None = None, include_default_pygments_style: bool = True) → None`

```
print_formatted_text(*values, sep=' ', end='\n', file=None, flush=False,
↪ style=None, output=None)
```

Print text to stdout. This is supposed to be compatible with Python's `print` function, but supports printing of formatted text. You can pass a `FormattedText`, `HTML` or `ANSI` object to print formatted text.

- Print HTML as follows:

```
print_formatted_text(HTML('<i>Some italic text</i> <ansired>This is red!</<
↪ansired>'))

style = Style.from_dict({
    'hello': '#ff0066',
```

(continues on next page)

(continued from previous page)

```

    'world': '#884444 italic',
  })
  print_formatted_text(HTML('<hello>Hello</hello> <world>world</world>!'),
    ↪ style=style)

```

- Print a list of (style\_str, text) tuples in the given style to the output. E.g.:

```

style = Style.from_dict({
    'hello': '#ff0066',
    'world': '#884444 italic',
})
fragments = FormattedText([
    ('class:hello', 'Hello'),
    ('class:world', 'World'),
])
print_formatted_text(fragments, style=style)

```

If you want to print a list of Pygments tokens, wrap it in `PygmentsTokens` to do the conversion.

If a `prompt_toolkit Application` is currently running, this will always print above the application or prompt (similar to `patch_stdout`). So, `print_formatted_text` will erase the current application, print the text, and render the application again.

#### Parameters

- **values** – Any kind of printable object, or formatted string.
- **sep** – String inserted between values, default a space.
- **end** – String appended after the last value, default a newline.
- **style** – `Style` instance for the color scheme.
- **include\_default\_pygments\_style** – `bool`. Include the default Pygments style when set to `True` (the default).

`prompt_toolkit.shortcuts.set_title(text: str) → None`

Set the terminal title.

**class** `prompt_toolkit.shortcuts.ProgressBar` (*title: AnyFormattedText = None, formatters: Sequence[Formatter] | None = None, bottom\_toolbar: AnyFormattedText = None, style: BaseStyle | None = None, key\_bindings: KeyBindings | None = None, cancel\_callback: Callable[[], None] | None = None, file: TextIO | None = None, color\_depth: ColorDepth | None = None, output: Output | None = None, input: Input | None = None*)

Progress bar context manager.

Usage

```

with ProgressBar(...) as pb:
    for item in pb(data):
        ...

```

#### Parameters

- **title** – Text to be displayed above the progress bars. This can be a callable or formatted text as well.

- **formatters** – List of *Formatter* instances.
- **bottom\_toolbar** – Text to be displayed in the bottom toolbar. This can be a callable or formatted text.
- **style** – *prompt\_toolkit.styles.BaseStyle* instance.
- **key\_bindings** – *KeyBindings* instance.
- **cancel\_callback** – Callback function that’s called when control-c is pressed by the user. This can be used for instance to start “proper” cancellation if the wrapped code supports it.
- **file** – The file object used for rendering, by default *sys.stderr* is used.
- **color\_depth** – *prompt\_toolkit.ColorDepth* instance.
- **output** – *Output* instance.
- **input** – *Input* instance.

```
prompt_toolkit.shortcuts.input_dialog (title: AnyFormattedText = "", text: AnyFormattedText = "", ok_text: str = 'OK', cancel_text: str = 'Cancel', completer: Completer | None = None, validator: Validator | None = None, password: FilterOrBool = False, style: BaseStyle | None = None, default: str = "") → Application[str]
```

Display a text input box. Return the given text, or None when cancelled.

```
prompt_toolkit.shortcuts.message_dialog (title: AnyFormattedText = "", text: AnyFormattedText = "", ok_text: str = 'Ok', style: BaseStyle | None = None) → Application[None]
```

Display a simple message box and wait until the user presses enter.

```
prompt_toolkit.shortcuts.progress_dialog (title: AnyFormattedText = "", text: AnyFormattedText = "", run_callback: Callable[[Callable[[int], None], Callable[[str], None]], None] = <function <lambda>>, style: BaseStyle | None = None) → Application[None]
```

**Parameters** **run\_callback** – A function that receives as input a *set\_percentage* function and it does the work.

```
prompt_toolkit.shortcuts.radiolist_dialog (title: AnyFormattedText = "", text: AnyFormattedText = "", ok_text: str = 'Ok', cancel_text: str = 'Cancel', values: Sequence[tuple[_T, AnyFormattedText]] | None = None, default: _T | None = None, style: BaseStyle | None = None) → Application[_T]
```

Display a simple list of element the user can choose amongst.

Only one element can be selected at a time using Arrow keys and Enter. The focus can be moved between the list and the Ok/Cancel button with tab.

```
prompt_toolkit.shortcuts.yes_no_dialog (title: AnyFormattedText = "", text: AnyFormattedText = "", yes_text: str = 'Yes', no_text: str = 'No', style: BaseStyle | None = None) → Application[bool]
```

Display a Yes/No dialog. Return a boolean.

`prompt_toolkit.shortcuts.button_dialog` (*title: AnyFormattedText = "*, *text: AnyFormattedText = "*, *buttons: list[tuple[str, \_T]] = []*, *style: BaseStyle | None = None*) → `Application[_T]`

Display a dialog with button choices (given as a list of tuples). Return the value associated with button.

Formatter classes for the progress bar. Each progress bar consists of a list of these formatters.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.Formatter`  
 Base class for any formatter.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.Text` (*text: Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str], Callable[[prompt\_toolkit.mouse\_events.MouseEvent], None]]], Callable[[Any], None], style: str = "*)

Display plain text.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.Label` (*width: Union[None, int, prompt\_toolkit.layout.dimension.Dimension], Callable[[Any], None], suffix: str = "*)

Display the name of the current task.

#### Parameters

- **width** – If a *width* is given, use this width. Scroll the text if it doesn't fit in this width.
- **suffix** – String suffix to be added after the task name, e.g. ':'. If no task name was given, no suffix will be added.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.Percentage`  
 Display the progress as a percentage.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.Bar` (*start: str = '['*, *end: str = ']'*, *sym\_a: str = '='*, *sym\_b: str = '>'*, *sym\_c: str = ' '*, *unknown: str = '#'*)

Display the progress bar itself.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.Progress`  
 Display the progress as text. E.g. "8/20"

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.TimeElapsed`  
 Display the elapsed time.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.TimeLeft`  
 Display the time left.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.IterationsPerSecond`  
 Display the iterations per second.

**class** `prompt_toolkit.shortcuts.progress_bar.formatters.SpinningWheel`  
 Display a spinning wheel.

```
class prompt_toolkit.shortcuts.progress_bar.formatters.Rainbow (formatter:
                                                                    prompt_toolkit.shortcuts.progress_bar.formatters.
```

For the fun. Add rainbow colors to any of the other formatters.

```
prompt_toolkit.shortcuts.progress_bar.formatters.create_default_formatters ()
                                                                    →
                                                                    list[Formatter]
```

Return the list of default formatters.

### 3.11.13 Validation

Input validation for a *Buffer*. (Validators will be called before accepting input.)

```
class prompt_toolkit.validation.ConditionalValidator (validator:
                                                         prompt_toolkit.validation.Validator,
                                                         filter:
                                                         Union[prompt_toolkit.filters.base.Filter,
                                                         bool])
```

Validator that can be switched on/off according to a filter. (This wraps around another validator.)

```
exception prompt_toolkit.validation.ValidationError (cursor_position: int = 0, message: str = ")
```

Error raised by *Validator.validate()*.

#### Parameters

- **cursor\_position** – The cursor position where the error occurred.
- **message** – Text.

```
class prompt_toolkit.validation.Validator
```

Abstract base class for an input validator.

A validator is typically created in one of the following two ways:

- Either by overriding this class and implementing the *validate* method.
- Or by passing a callable to *Validator.from\_callable*.

If the validation takes some time and needs to happen in a background thread, this can be wrapped in a *ThreadedValidator*.

```
classmethod from_callable (validate_func: Callable[[str], bool], error_message: str =
                             'Invalid input', move_cursor_to_end: bool = False) →
                             prompt_toolkit.validation.Validator
```

Create a validator from a simple validate callable. E.g.:

```
def is_valid(text):
    return text in ['hello', 'world']
Validator.from_callable(is_valid, error_message='Invalid input')
```

#### Parameters

- **validate\_func** – Callable that takes the input string, and returns *True* if the input is valid input.
- **error\_message** – Message to be displayed if the input is invalid.
- **move\_cursor\_to\_end** – Move the cursor to the end of the input, if the input is invalid.

**validate** (*document: prompt\_toolkit.document.Document*) → None  
Validate the input. If invalid, this should raise a *ValidationError*.

**Parameters** *document* – *Document* instance.

**validate\_async** (*document: prompt\_toolkit.document.Document*) → None  
Return a *Future* which is set when the validation is ready. This function can be overloaded in order to provide an asynchronous implementation.

**class** `prompt_toolkit.validation.ThreadedValidator` (*validator: prompt\_toolkit.validation.Validator*)  
Wrapper that runs input validation in a thread. (Use this to prevent the user interface from becoming unresponsive if the input validation takes too much time.)

**validate\_async** (*document: prompt\_toolkit.document.Document*) → None  
Run the *validate* function in a thread.

**class** `prompt_toolkit.validation.DummyValidator`  
Validator class that accepts any input.

**class** `prompt_toolkit.validation.DynamicValidator` (*get\_validator: Callable[[], Validator | None]*)  
Validator class that can dynamically returns any *Validator*.

**Parameters** *get\_validator* – Callable that returns a *Validator* instance.

### 3.11.14 Auto suggestion

Fish-style like auto-suggestion.

While a user types input in a certain buffer, suggestions are generated (asynchronously.) Usually, they are displayed after the input. When the cursor presses the right arrow and the cursor is at the end of the input, the suggestion will be inserted.

If you want the auto suggestions to be asynchronous (in a background thread), because they take too much time, and could potentially block the event loop, then wrap the *AutoSuggest* instance into a *ThreadedAutoSuggest*.

**class** `prompt_toolkit.auto_suggest.Suggestion` (*text: str*)  
Suggestion returned by an auto-suggest algorithm.

**Parameters** *text* – The suggestion text.

**class** `prompt_toolkit.auto_suggest.AutoSuggest`  
Base class for auto suggestion implementations.

**get\_suggestion** (*buffer: Buffer, document: Document*) → *Suggestion* | None  
Return *None* or a *Suggestion* instance.

We receive both *Buffer* and *Document*. The reason is that auto suggestions are retrieved asynchronously. (Like completions.) The buffer text could be changed in the meantime, but *document* contains the buffer document like it was at the start of the auto suggestion call. So, from here, don't access *buffer.text*, but use *document.text* instead.

**Parameters**

- **buffer** – The *Buffer* instance.
- **document** – The *Document* instance.

**get\_suggestion\_async** (*buff: 'Buffer', document: Document*) → *Suggestion* | None  
Return a *Future* which is set when the suggestions are ready. This function can be overloaded in order to provide an asynchronous implementation.

**class** `prompt_toolkit.auto_suggest.ThreadedAutoSuggest` (*auto\_suggest:* `prompt_toolkit.auto_suggest.AutoSuggest`)

Wrapper that runs auto suggestions in a thread. (Use this to prevent the user interface from becoming unresponsive if the generation of suggestions takes too much time.)

**get\_suggestion\_async** (*buff:* 'Buffer', *document:* Document) → Suggestion | None

Run the `get_suggestion` function in a thread.

**class** `prompt_toolkit.auto_suggest.DummyAutoSuggest`

AutoSuggest class that doesn't return any suggestion.

**class** `prompt_toolkit.auto_suggest.AutoSuggestFromHistory`

Give suggestions based on the lines in the history.

**class** `prompt_toolkit.auto_suggest.ConditionalAutoSuggest` (*auto\_suggest:* AutoSuggest, *filter:* bool | Filter)

Auto suggest that can be turned on and of according to a certain condition.

**class** `prompt_toolkit.auto_suggest.DynamicAutoSuggest` (*get\_auto\_suggest:* Callable[[], AutoSuggest | None])

Validator class that can dynamically returns any Validator.

**Parameters** `get_validator` – Callable that returns a `Validator` instance.

### 3.11.15 Renderer

Renders the command line on the console. (Redraws parts of the input line that were changed.)

**class** `prompt_toolkit.renderer.Renderer` (*style:* BaseStyle, *output:* Output, *full\_screen:* bool = False, *mouse\_support:* FilterOrBool = False, *cpr\_not\_supported\_callback:* Callable[[], None] | None = None)

Typical usage:

```
output = Vt100_Output.from_pty(sys.stdout)
r = Renderer(style, output)
r.render(app, layout=...)
```

**clear** () → None

Clear screen and go to 0,0

**erase** (*leave\_alternate\_screen:* bool = True) → None

Hide all output and put the cursor back at the first line. This is for instance used for running a system command (while hiding the CLI) and later resuming the same CLI.)

**Parameters** `leave_alternate_screen` – When True, and when inside an alternate screen buffer, quit the alternate screen.

**height\_is\_known**

True when the height from the cursor until the bottom of the terminal is known. (It's often nicer to draw bottom toolbars only if the height is known, in order to avoid flickering when the CPR response arrives.)

**last\_rendered\_screen**

The `Screen` class that was generated during the last rendering. This can be `None`.

**render** (*app:* Application[Any], *layout:* Layout, *is\_done:* bool = False) → None

Render the current interface to the output.

**Parameters** `is_done` – When True, put the cursor at the end of the interface. We won't print any changes to this part.

**report\_absolute\_cursor\_row** (*row: int*) → None

To be called when we know the absolute cursor position. (As an answer of a “Cursor Position Request” response.)

**request\_absolute\_cursor\_position** () → None

Get current cursor position.

We do this to calculate the minimum available height that we can consume for rendering the prompt. This is the available space below the cursor.

For vt100: Do CPR request. (answer will arrive later.) For win32: Do API call. (Answer comes immediately.)

**rows\_above\_layout**

Return the number of rows visible in the terminal above the layout.

**wait\_for\_cpr\_responses** (*timeout: int = 1*) → None

Wait for a CPR response.

**waiting\_for\_cpr**

Waiting for CPR flag. True when we send the request, but didn’t got a response.

`prompt_toolkit.renderer.print_formatted_text` (*output: Output, formatted\_text: Any-FormattedText, style: BaseStyle, style\_transformation: StyleTransformation | None = None, color\_depth: ColorDepth | None = None*) → None

Print a list of (style\_str, text) tuples in the given style to the output.

### 3.11.16 Lexers

Lexer interface and implementations. Used for syntax highlighting.

**class** `prompt_toolkit.lexers.Lexer`

Base class for all lexers.

**invalidation\_hash** () → Hashable

When this changes, *lex\_document* could give a different output. (Only used for *DynamicLexer*.)

**lex\_document** (*document: prompt\_toolkit.document.Document*) → Callable[[int], List[Union[Tuple[str, str], Tuple[str, str, Callable[[prompt\_toolkit.mouse\_events.MouseEvent], NotImplementedOrNone]]]]]

Takes a *Document* and returns a callable that takes a line number and returns a list of (style\_str, text) tuples for that line.

**XXX: Note that in the past, this was supposed to return a list** of (Token, text) tuples, just like a Pygments lexer.

**class** `prompt_toolkit.lexers.SimpleLexer` (*style: str = ""*)

Lexer that doesn’t do any tokenizing and returns the whole input as one token.

**Parameters** **style** – The style string for this lexer.

**class** `prompt_toolkit.lexers.DynamicLexer` (*get\_lexer: Callable[[], Lexer | None]*)

Lexer class that can dynamically returns any Lexer.

**Parameters** **get\_lexer** – Callable that returns a *Lexer* instance.

**class** `prompt_toolkit.lexers.PygmentsLexer` (*pygments\_lexer\_cls: type[PygmentsLexerCls], sync\_from\_start: FilterOrBool = True, syntax\_sync: SyntaxSync | None = None*)

Lexer that calls a pygments lexer.

Example:

```
from pygments.lexers.html import HtmlLexer
lexer = PygmentsLexer(HtmlLexer)
```

Note: Don't forget to also load a Pygments compatible style. E.g.:

```
from prompt_toolkit.styles.from_pygments import style_from_pygments_cls
from pygments.styles import get_style_by_name
style = style_from_pygments_cls(get_style_by_name('monokai'))
```

### Parameters

- **pygments\_lexer\_cls** – A *Lexer* from Pygments.
- **sync\_from\_start** – Start lexing at the start of the document. This will always give the best results, but it will be slow for bigger documents. (When the last part of the document is display, then the whole document will be lexed by Pygments on every key stroke.) It is recommended to disable this for inputs that are expected to be more than 1,000 lines.
- **syntax\_sync** – *SyntaxSync* object.

```
classmethod from_filename(filename: str, sync_from_start:
                        Union[prompt_toolkit.filters.base.Filter, bool] = True) →
prompt_toolkit.lexers.base.Lexer
```

Create a *Lexer* from a filename.

```
lex_document(document: prompt_toolkit.document.Document) →
Callable[[int], List[Union[Tuple[str, str], Tuple[str, str],
                        Callable[[prompt_toolkit.mouse_events.MouseEvent], NotImplementedOrNone]]]]
```

Create a lexer function that takes a line number and returns the list of (style\_str, text) tuples as the Pygments lexer returns for that line.

```
class prompt_toolkit.lexers.RegexSync(pattern: str)
Synchronize by starting at a line that matches the given regex pattern.
```

```
classmethod from_pygments_lexer_cls(lexer_cls: PygmentsLexerCls) → RegexSync
Create a RegexSync instance for this Pygments lexer class.
```

```
get_sync_start_position(document: Document, lineno: int) → tuple[int, int]
Scan backwards, and find a possible position to start.
```

```
class prompt_toolkit.lexers.SyncFromStart
Always start the syntax highlighting from the beginning.
```

```
class prompt_toolkit.lexers.SyntaxSync
Syntax synchroniser. This is a tool that finds a start position for the lexer. This is especially important when editing big documents; we don't want to start the highlighting by running the lexer from the beginning of the file. That is very slow when editing.
```

```
get_sync_start_position(document: Document, lineno: int) → tuple[int, int]
Return the position from where we can start lexing as a (row, column) tuple.
```

### Parameters

- **document** – *Document* instance that contains all the lines.
- **lineno** – The line that we want to highlight. (We need to return this line, or an earlier position.)

### 3.11.17 Layout

#### Command line layout definitions

The layout of a command line interface is defined by a `Container` instance. There are two main groups of classes here. Containers and controls:

- A container can contain other containers or controls, it can have multiple children and it decides about the dimensions.
- A control is responsible for rendering the actual content to a screen. A control can propose some dimensions, but it's the container who decides about the dimensions – or when the control consumes more space – which part of the control will be visible.

Container classes:

```
- Container (Abstract base class)
  |- HSplit (Horizontal split)
  |- VSplit (Vertical split)
  |- FloatContainer (Container which can also contain menus and other floats)
  \- Window (Container which contains one actual control)
```

Control classes:

```
- UIControl (Abstract base class)
  |- FormattedTextControl (Renders formatted text, or a simple list of text_
↪fragments)
  \- BufferControl (Renders an input buffer.)
```

Usually, you end up wrapping every control inside a `Window` object, because that's the only way to render it in a layout.

There are some prepared toolbars which are ready to use:

```
- SystemToolbar (Shows the 'system' input buffer, for entering system commands.)
- ArgToolbar (Shows the input 'arg', for repetition of input commands.)
- SearchToolbar (Shows the 'search' input buffer, for incremental search.)
- CompletionsToolbar (Shows the completions of the current buffer.)
- ValidationToolbar (Shows validation errors of the current buffer.)
```

And one prepared menu:

- `CompletionsMenu`

#### The layout class itself

```
class prompt_toolkit.layout.Layout (container: AnyContainer, focused_element: Focus-
ableElement | None = None)
```

The layout for a `prompt_toolkit Application`. This also keeps track of which user control is focused.

##### Parameters

- **container** – The “root” container for the layout.
- **focused\_element** – element to be focused initially. (Can be anything the `focus` function accepts.)

##### **buffer\_has\_focus**

Return `True` if the currently focused control is a `BufferControl`. (For instance, used to determine whether the default key bindings should be active or not.)

**current\_buffer**

The currently focused *Buffer* or *None*.

**current\_control**

Get the *UIControl* to currently has the focus.

**current\_window**

Return the *Window* object that is currently focused.

**find\_all\_windows** () → Generator[prompt\_toolkit.layout.containers.Window, None, None]

Find all the *UIControl* objects in this layout.

**focus** (value: Union[str, prompt\_toolkit.buffer.Buffer, prompt\_toolkit.layout.controls.UIControl, prompt\_toolkit.layout.containers.Container, MagicContainer]) → None

Focus the given UI element.

value can be either:

- a *UIControl*
- a *Buffer* instance or the name of a *Buffer*
- a *Window*
- Any container object. In this case we will focus the *Window* from this container that was focused most recent, or the very first focusable *Window* of the container.

**focus\_last** () → None

Give the focus to the last focused control.

**focus\_next** () → None

Focus the next visible/focusable Window.

**focus\_previous** () → None

Focus the previous visible/focusable Window.

**get\_buffer\_by\_name** (buffer\_name: str) → Buffer | None

Look in the layout for a buffer with the given name. Return *None* when nothing was found.

**get\_focusable\_windows** () → Iterable[prompt\_toolkit.layout.containers.Window]

Return all the *Window* objects which are focusable (in the ‘modal’ area).

**get\_parent** (container: Container) → Container | None

Return the parent container for the given container, or *None*, if it wasn’t found.

**get\_visible\_focusable\_windows** () → list[Window]

Return a list of *Window* objects that are focusable.

**has\_focus** (value: Union[str, prompt\_toolkit.buffer.Buffer, prompt\_toolkit.layout.controls.UIControl, prompt\_toolkit.layout.containers.Container, MagicContainer]) → bool

Check whether the given control has the focus. :param value: *UIControl* or *Window* instance.

**is\_searching**

True if we are searching right now.

**previous\_control**

Get the *UIControl* to previously had the focus.

**search\_target\_buffer\_control**

Return the *BufferControl* in which we are searching or *None*.

**update\_parents\_relations** () → None

Update child->parent relationships mapping.

**walk** () → Iterable[prompt\_toolkit.layout.containers.Container]  
Walk through all the layout nodes (and their children) and yield them.

**walk\_through\_modal\_area** () → Iterable[prompt\_toolkit.layout.containers.Container]  
Walk through all the containers which are in the current 'modal' part of the layout.

**class** prompt\_toolkit.layout.InvalidLayoutError

**class** prompt\_toolkit.layout.walk  
Walk through layout, starting at this container.

## Containers

**class** prompt\_toolkit.layout.Container

Base class for user interface layout.

**get\_children** () → list[Container]  
Return the list of child *Container* objects.

**get\_key\_bindings** () → KeyBindingsBase | None  
Returns a *KeyBindings* object. These bindings become active when any user control in this container has the focus, except if any containers between this container and the focused user control is modal.

**is\_modal** () → bool  
When this container is modal, key bindings from parent containers are not taken into account if a user control in this container is focused.

**preferred\_height** (*width*: int, *max\_available\_height*: int) → prompt\_toolkit.layout.dimension.Dimension  
Return a *Dimension* that represents the desired height for this container.

**preferred\_width** (*max\_available\_width*: int) → prompt\_toolkit.layout.dimension.Dimension  
Return a *Dimension* that represents the desired width for this container.

**reset** () → None  
Reset the state of this container and all the children. (E.g. reset scroll offsets, etc. ...)

**write\_to\_screen** (*screen*: Screen, *mouse\_handlers*: MouseHandlers, *write\_position*: WritePosition, *parent\_style*: str, *erase\_bg*: bool, *z\_index*: int | None) → None  
Write the actual content to the screen.

### Parameters

- **screen** – *Screen*
- **mouse\_handlers** – *MouseHandlers*.
- **parent\_style** – Style string to pass to the *Window* object. This will be applied to all content of the windows. *VSplit* and *HSplit* can use it to pass their style down to the windows that they contain.
- **z\_index** – Used for propagating *z\_index* from parent to child.

**class** prompt\_toolkit.layout.HSplit (*children*: Sequence[AnyContainer], *window\_too\_small*: Container | None = None, *align*: VerticalAlign = <VerticalAlign.JUSTIFY: 'JUSTIFY'>, *padding*: AnyDimension = 0, *padding\_char*: str | None = None, *padding\_style*: str = "", *width*: AnyDimension = None, *height*: AnyDimension = None, *z\_index*: int | None = None, *modal*: bool = False, *key\_bindings*: KeyBindingsBase | None = None, *style*: str | Callable[[], str] = "")

Several layouts, one stacked above/under the other.

```
+-----+
|           |
+-----+
|           |
+-----+
```

By default, this doesn't display a horizontal line between the children, but if this is something you need, then create a `HSplit` as follows:

```
HSplit(children=[ ... ], padding_char='-',
        padding=1, padding_style='#ffff00')
```

### Parameters

- **children** – List of child *Container* objects.
- **window\_too\_small** – A *Container* object that is displayed if there is not enough space for all the children. By default, this is a “Window too small” message.
- **align** – *VerticalAlign* value.
- **width** – When given, use this width instead of looking at the children.
- **height** – When given, use this height instead of looking at the children.
- **z\_index** – (int or None) When specified, this can be used to bring element in front of floating elements. *None* means: inherit from parent.
- **style** – A style string.
- **modal** – True or False.
- **key\_bindings** – None or a *KeyBindings* object.
- **padding** – (*Dimension* or int), size to be used for the padding.
- **padding\_char** – Character to be used for filling in the padding.
- **padding\_style** – Style to applied to the padding.

**write\_to\_screen** (*screen: Screen, mouse\_handlers: MouseHandlers, write\_position: WritePosition, parent\_style: str, erase\_bg: bool, z\_index: int | None*) → None  
Render the prompt to a *Screen* instance.

**Parameters screen** – The *Screen* class to which the output has to be written.

```
class prompt_toolkit.layout.VSplit(children: Sequence[AnyContainer], window_too_small:
    Container | None = None, align: HorizontalAlign = <HorizontalAlign.JUSTIFY>, padding: AnyDimension = 0, padding_char: str | None = None, padding_style: str = "", width: AnyDimension = None, height: AnyDimension = None, z_index: int | None = None, modal: bool = False, key_bindings: KeyBindingsBase | None = None, style: str | Callable[[], str] = "")
```

Several layouts, one stacked left/right of the other.

```
+-----+-----+
|           |           |
|           |           |
+-----+-----+
```

By default, this doesn't display a vertical line between the children, but if this is something you need, then create a `HSplit` as follows:

```
VSplit(children=[ ... ], padding_char='|',
        padding=1, padding_style='#ffff00')
```

### Parameters

- **children** – List of child *Container* objects.
- **window\_too\_small** – A *Container* object that is displayed if there is not enough space for all the children. By default, this is a “Window too small” message.
- **align** – *HorizontalAlign* value.
- **width** – When given, use this width instead of looking at the children.
- **height** – When given, use this height instead of looking at the children.
- **z\_index** – (int or None) When specified, this can be used to bring element in front of floating elements. *None* means: inherit from parent.
- **style** – A style string.
- **modal** – True or False.
- **key\_bindings** – None or a *KeyBindings* object.
- **padding** – (*Dimension* or int), size to be used for the padding.
- **padding\_char** – Character to be used for filling in the padding.
- **padding\_style** – Style to applied to the padding.

**write\_to\_screen** (*screen: Screen, mouse\_handlers: MouseHandlers, write\_position: WritePosition, parent\_style: str, erase\_bg: bool, z\_index: int | None*) → None  
Render the prompt to a *Screen* instance.

**Parameters screen** – The *Screen* class to which the output has to be written.

```
class prompt_toolkit.layout.FloatContainer (content: AnyContainer, floats: list[Float],
                                           modal: bool = False, key_bindings: Key-
                                           BindingsBase | None = None, style: str |
                                           Callable[[], str] = "", z_index: int | None =
                                           None)
```

Container which can contain another container for the background, as well as a list of floating containers on top of it.

Example Usage:

```
FloatContainer (content=Window (...),
               floats=[
                   Float (xcursor=True,
                         ycursor=True,
                         content=CompletionsMenu (...))
               ])
```

**Parameters z\_index** – (int or None) When specified, this can be used to bring element in front of floating elements. *None* means: inherit from parent. This is the `z_index` for the whole *Float* container as a whole.

**preferred\_height** (*width: int, max\_available\_height: int*) →  
 prompt\_toolkit.layout.dimension.Dimension

Return the preferred height of the float container. (We don't care about the height of the floats, they should always fit into the dimensions provided by the container.)

**class** prompt\_toolkit.layout.**Float** (*content: AnyContainer, top: int | None = None, right: int | None = None, bottom: int | None = None, left: int | None = None, width: int | Callable[[], int] | None = None, height: int | Callable[[], int] | None = None, xcursor: bool = False, ycursor: bool = False, attach\_to\_window: AnyContainer | None = None, hide\_when\_covering\_content: bool = False, allow\_cover\_cursor: bool = False, z\_index: int = 1, transparent: bool = False*)

Float for use in a *FloatContainer*. Except for the *content* parameter, all other options are optional.

#### Parameters

- **content** – *Container* instance.
- **width** – *Dimension* or callable which returns a *Dimension*.
- **height** – *Dimension* or callable which returns a *Dimension*.
- **left** – Distance to the left edge of the *FloatContainer*.
- **right** – Distance to the right edge of the *FloatContainer*.
- **top** – Distance to the top of the *FloatContainer*.
- **bottom** – Distance to the bottom of the *FloatContainer*.
- **attach\_to\_window** – Attach to the cursor from this window, instead of the current window.
- **hide\_when\_covering\_content** – Hide the float when it covers content underneath.
- **allow\_cover\_cursor** – When *False*, make sure to display the float below the cursor. Not on top of the indicated position.
- **z\_index** – Z-index position. For a *Float*, this needs to be at least one. It is relative to the *z\_index* of the parent container.
- **transparent** – *Filter* indicating whether this float needs to be drawn transparently.

```
class prompt_toolkit.layout.Window(content: UIControl | None = None, width: AnyDimension = None, height: AnyDimension = None, z_index: int | None = None, dont_extend_width: FilterOrBool = False, dont_extend_height: FilterOrBool = False, ignore_content_width: FilterOrBool = False, ignore_content_height: FilterOrBool = False, left_margins: Sequence[Margin] | None = None, right_margins: Sequence[Margin] | None = None, scroll_offsets: ScrollOffsets | None = None, allow_scroll_beyond_bottom: FilterOrBool = False, wrap_lines: FilterOrBool = False, get_vertical_scroll: Callable[[Window], int] | None = None, get_horizontal_scroll: Callable[[Window], int] | None = None, always_hide_cursor: FilterOrBool = False, cursorline: FilterOrBool = False, cursorcolumn: FilterOrBool = False, colorcolumns: None | list[ColorColumn] | Callable[[], list[ColorColumn]] = None, align: WindowAlign | Callable[[], WindowAlign] = <WindowAlign.LEFT: 'LEFT'>, style: str | Callable[[], str] = "", char: None | str | Callable[[], str] = None, get_line_prefix: GetLinePrefixCallable | None = None)
```

Container that holds a control.

#### Parameters

- **content** – *UIControl* instance.
- **width** – *Dimension* instance or callable.
- **height** – *Dimension* instance or callable.
- **z\_index** – When specified, this can be used to bring element in front of floating elements.
- **dont\_extend\_width** – When *True*, don't take up more width than the preferred width reported by the control.
- **dont\_extend\_height** – When *True*, don't take up more width than the preferred height reported by the control.
- **ignore\_content\_width** – A *bool* or *Filter* instance. Ignore the *UIContent* width when calculating the dimensions.
- **ignore\_content\_height** – A *bool* or *Filter* instance. Ignore the *UIContent* height when calculating the dimensions.
- **left\_margins** – A list of *Margin* instance to be displayed on the left. For instance: *NumberedMargin* can be one of them in order to show line numbers.
- **right\_margins** – Like *left\_margins*, but on the other side.
- **scroll\_offsets** – *ScrollOffsets* instance, representing the preferred amount of lines/columns to be always visible before/after the cursor. When both top and bottom are a very high number, the cursor will be centered vertically most of the time.
- **allow\_scroll\_beyond\_bottom** – A *bool* or *Filter* instance. When *True*, allow scrolling so far, that the top part of the content is not visible anymore, while there is still empty space available at the bottom of the window. In the Vi editor for instance, this is possible. You will see tildes while the top part of the body is hidden.
- **wrap\_lines** – A *bool* or *Filter* instance. When *True*, don't scroll horizontally, but wrap lines instead.

- **get\_vertical\_scroll** – Callable that takes this window instance as input and returns a preferred vertical scroll. (When this is *None*, the scroll is only determined by the last and current cursor position.)
- **get\_horizontal\_scroll** – Callable that takes this window instance as input and returns a preferred vertical scroll.
- **always\_hide\_cursor** – A *bool* or *Filter* instance. When True, never display the cursor, even when the user control specifies a cursor position.
- **cursorline** – A *bool* or *Filter* instance. When True, display a cursorline.
- **cursorcolumn** – A *bool* or *Filter* instance. When True, display a cursorcolumn.
- **colorcolumns** – A list of *ColorColumn* instances that describe the columns to be highlighted, or a callable that returns such a list.
- **align** – *WindowAlign* value or callable that returns an *WindowAlign* value. alignment of content.
- **style** – A style string. Style to be applied to all the cells in this window. (This can be a callable that returns a string.)
- **char** – (string) Character to be used for filling the background. This can also be a callable that returns a character.
- **get\_line\_prefix** – None or a callable that returns formatted text to be inserted before a line. It takes a line number (int) and a wrap\_count and returns formatted text. This can be used for implementation of line continuations, things like Vim “breakindent” and so on.

**preferred\_height** (*width: int, max\_available\_height: int*) → *prompt\_toolkit.layout.dimension.Dimension*  
Calculate the preferred height for this window.

**preferred\_width** (*max\_available\_width: int*) → *prompt\_toolkit.layout.dimension.Dimension*  
Calculate the preferred width for this window.

**write\_to\_screen** (*screen: Screen, mouse\_handlers: MouseHandlers, write\_position: WritePosition, parent\_style: str, erase\_bg: bool, z\_index: int | None*) → None  
Write window to screen. This renders the user control, the margins and copies everything over to the absolute position at the given screen.

**class** `prompt_toolkit.layout.WindowAlign`  
Alignment of the Window content.

Note that this is different from *HorizontalAlign* and *VerticalAlign*, which are used for the alignment of the child containers in respectively *VSplit* and *HSplit*.

**class** `prompt_toolkit.layout.ConditionalContainer` (*content: Union[prompt\_toolkit.layout.containers.Container, MagicContainer], filter: Union[prompt\_toolkit.filters.base.Filter, bool]*)

Wrapper around any other container that can change the visibility. The received *filter* determines whether the given container should be displayed or not.

#### Parameters

- **content** – *Container* instance.
- **filter** – *Filter* instance.

```
class prompt_toolkit.layout.DynamicContainer (get_container: Callable[[],  
Union[prompt_toolkit.layout.containers.Container,  
MagicContainer]])
```

Container class that dynamically returns any Container.

**Parameters** **get\_container** – Callable that returns a *Container* instance or any widget with a `__pt_container__` method.

```
class prompt_toolkit.layout.ScrollablePane (content: Container, scroll_offsets: ScrollOffsets | None = None,  
keep_cursor_visible: FilterOrBool = True,  
keep_focused_window_visible: FilterOrBool = True, max_available_height: int = 10000,  
width: AnyDimension = None, height: AnyDimension = None, show_scrollbar: FilterOrBool = True,  
display_arrows: FilterOrBool = True, up_arrow_symbol: str = '^', down_arrow_symbol: str = 'v')
```

Container widget that exposes a larger virtual screen to its content and displays it in a vertical scrollbar region.

Typically this is wrapped in a large *HSplit* container. Make sure in that case to not specify a *height* dimension of the *HSplit*, so that it will scale according to the content.

---

**Note:** If you want to display a completion menu for widgets in this *ScrollablePane*, then it's still a good practice to use a *FloatContainer* with a *CompletionsMenu* in a *Float* at the top-level of the layout hierarchy, rather than nesting a *FloatContainer* in this *ScrollablePane*. (Otherwise, it's possible that the completion menu is clipped.)

---

### Parameters

- **content** – The content container.
- **scroll\_offset** – Try to keep the cursor within this distance from the top/bottom (left/right offset is not used).
- **keep\_cursor\_visible** – When *True*, automatically scroll the pane so that the cursor (of the focused window) is always visible.
- **keep\_focused\_window\_visible** – When *True*, automatically scroll the pane so that the focused window is visible, or as much visible as possible if it doesn't completely fit the screen.
- **max\_available\_height** – Always constraint the height to this amount for performance reasons.
- **width** – When given, use this width instead of looking at the children.
- **height** – When given, use this height instead of looking at the children.
- **show\_scrollbar** – When *True* display a scrollbar on the right.

```
write_to_screen (screen: Screen, mouse_handlers: MouseHandlers, write_position: WritePosition,  
parent_style: str, erase_bg: bool, z_index: int | None) → None
```

Render scrollable pane content.

This works by rendering on an off-screen canvas, and copying over the visible region.

```
class prompt_toolkit.layout.ScrollOffsets (top: int | Callable[[], int] = 0, bottom: int | Callable[[], int] = 0,  
left: int | Callable[[], int] = 0, right: int | Callable[[], int] = 0)
```

Scroll offsets for the *Window* class.

Note that left/right offsets only make sense if line wrapping is disabled.

**class** `prompt_toolkit.layout.ColorColumn` (*position: int, style: str = 'class:color-column'*)  
Column for a *Window* to be colored.

**class** `prompt_toolkit.layout.to_container`  
Make sure that the given object is a *Container*.

**class** `prompt_toolkit.layout.to_window`  
Make sure that the given argument is a *Window*.

**class** `prompt_toolkit.layout.is_container`  
Checks whether the given value is a container object (for use in assert statements).

**class** `prompt_toolkit.layout.HorizontalAlign`  
Alignment for *VSplit*.

**class** `prompt_toolkit.layout.VerticalAlign`  
Alignment for *HSplit*.

## Controls

**class** `prompt_toolkit.layout.BufferControl` (*buffer: Buffer | None = None, input\_processors: list[Processor] | None = None, include\_default\_input\_processors: bool = True, lexer: Lexer | None = None, preview\_search: FilterOrBool = False, focusable: FilterOrBool = True, search\_buffer\_control: None | SearchBufferControl | Callable[[], SearchBufferControl] = None, menu\_position: Callable[[], int | None] | None = None, focus\_on\_click: FilterOrBool = False, key\_bindings: KeyBindingsBase | None = None*)

Control for visualising the content of a *Buffer*.

### Parameters

- **buffer** – The *Buffer* object to be displayed.
- **input\_processors** – A list of *Processor* objects.
- **include\_default\_input\_processors** – When True, include the default processors for highlighting of selection, search and displaying of multiple cursors.
- **lexer** – *Lexer* instance for syntax highlighting.
- **preview\_search** – *bool* or *Filter*: Show search while typing. When this is *True*, probably you want to add a *HighlightIncrementalSearchProcessor* as well. Otherwise only the cursor position will move, but the text won't be highlighted.
- **focusable** – *bool* or *Filter*: Tell whether this control is focusable.
- **focus\_on\_click** – Focus this buffer when it's click, but not yet focused.
- **key\_bindings** – a *KeyBindings* object.

**create\_content** (*width: int, height: int, preview\_search: bool = False*) → `prompt_toolkit.layout.controls.UIContent`  
Create a *UIContent*.

**get\_invalidate\_events** () → `Iterable[Event[object]]`  
Return the *Window* invalidate events.

**get\_key\_bindings** () → KeyBindingsBase | None

When additional key bindings are given. Return these.

**mouse\_handler** (*mouse\_event: MouseEvent*) → NotImplementedOrNone

Mouse handler for this control.

**preferred\_width** (*max\_available\_width: int*) → int | None

This should return the preferred width.

**Note: We don't specify a preferred width according to the content**, because it would be too expensive. Calculating the preferred width can be done by calculating the longest line, but this would require applying all the processors to each line. This is unfeasible for a larger document, and doing it for small documents only would result in inconsistent behaviour.

**search\_state**

Return the *SearchState* for searching this *BufferControl*. This is always associated with the search control.

If one search bar is used for searching multiple *BufferControls*, then they share the same *SearchState*.

```
class prompt_toolkit.layout.SearchBufferControl (buffer: Buffer | None = None, input_processors: list[Processor] | None = None, lexer: Lexer | None = None, focus_on_click: FilterOrBool = False, key_bindings: KeyBindingsBase | None = None, ignore_case: FilterOrBool = False)
```

*BufferControl* which is used for searching another *BufferControl*.

**Parameters ignore\_case** – Search case insensitive.

```
class prompt_toolkit.layout.DummyControl
```

A dummy control object that doesn't paint any content.

Useful for filling a *Window*. (The *fragment* and *char* attributes of the *Window* class can be used to define the filling.)

```
class prompt_toolkit.layout.FormattedTextControl (text: AnyFormattedText = "", style_str = "", focusable: FilterOrBool = False, key_bindings: KeyBindingsBase | None = None, show_cursor: bool = True, modal: bool = False, get_cursor_position: Callable[[Point | None] | None = None])
```

Control that displays formatted text. This can be either plain text, an *HTML* object an *ANSI* object, a list of (*style\_str*, *text*) tuples or a callable that takes no argument and returns one of those, depending on how you prefer to do the formatting. See `prompt_toolkit.layout.formatted_text` for more information.

(It's mostly optimized for rather small widgets, like toolbars, menus, etc...)

When this UI control has the focus, the cursor will be shown in the upper left corner of this control by default. There are two ways for specifying the cursor position:

- Pass a *get\_cursor\_position* function which returns a *Point* instance with the current cursor position.
- If the (formatted) text is passed as a list of (*style*, *text*) tuples and there is one that looks like ('[SetCursorPosition]', ''), then this will specify the cursor position.

Mouse support:

The list of fragments can also contain tuples of three items, looking like: (*style\_str*, *text*, *handler*).

When mouse support is enabled and the user clicks on this fragment, then the given handler is called.

That handler should accept two inputs: (`Application`, `MouseEvent`) and it should either handle the event or return `NotImplemented` in case we want the containing `Window` to handle this event.

### Parameters

- **focusable** – *bool* or *Filter*: Tell whether this control is focusable.
- **text** – Text or formatted text to be displayed.
- **style** – Style string applied to the content. (If you want to style the whole *Window*, pass the style to the *Window* instead.)
- **key\_bindings** – a *KeyBindings* object.
- **get\_cursor\_position** – A callable that returns the cursor position as a *Point* instance.

**mouse\_handler** (*mouse\_event: MouseEvent*) → `NotImplementedOrNone`  
Handle mouse events.

(When the fragment list contained mouse handlers and the user clicked on on any of these, the matching handler is called. This handler can still return `NotImplemented` in case we want the *Window* to handle this particular event.)

**preferred\_height** (*width: int, max\_available\_height: int, wrap\_lines: bool, get\_line\_prefix: GetLinePrefixCallable | None*) → `int | None`  
Return the preferred height for this control.

**preferred\_width** (*max\_available\_width: int*) → `int`  
Return the preferred width for this control. That is the width of the longest line.

**class** `prompt_toolkit.layout.UIControl`  
Base class for all user interface controls.

**create\_content** (*width: int, height: int*) → `prompt_toolkit.layout.controls.UIContent`  
Generate the content for this user control.  
Returns a *UIContent* instance.

**get\_invalidate\_events** () → `Iterable[Event[object]]`  
Return a list of *Event* objects. This can be a generator. (The application collects all these events, in order to bind redraw handlers to these events.)

**get\_key\_bindings** () → `KeyBindingsBase | None`  
The key bindings that are specific for this user control.  
Return a *KeyBindings* object if some key bindings are specified, or *None* otherwise.

**is\_focusable** () → `bool`  
Tell whether this user control is focusable.

**mouse\_handler** (*mouse\_event: MouseEvent*) → `NotImplementedOrNone`  
Handle mouse events.

When `NotImplemented` is returned, it means that the given event is not handled by the *UIControl* itself. The *Window* or key bindings can decide to handle this event as scrolling or changing focus.

**Parameters** **mouse\_event** – *MouseEvent* instance.

**move\_cursor\_down** () → `None`  
Request to move the cursor down. This happens when scrolling down and the cursor is completely at the top.

**move\_cursor\_up** () → `None`  
Request to move the cursor up.

```
class prompt_toolkit.layout.UIContent (get_line: Callable[[int], StyleAndTextTuples] =
                                     <function UIContent.<lambda>>, line_count: int
                                     = 0, cursor_position: Point | None = None,
                                     menu_position: Point | None = None, show_cursor:
                                     bool = True)
```

Content generated by a user control. This content consists of a list of lines.

#### Parameters

- **get\_line** – Callable that takes a line number and returns the current line. This is a list of (style\_str, text) tuples.
- **line\_count** – The number of lines.
- **cursor\_position** – a *Point* for the cursor position.
- **menu\_position** – a *Point* for the menu position.
- **show\_cursor** – Make the cursor visible.

```
get_height_for_line (lineno: int, width: int, get_line_prefix: GetLinePrefixCallable | None,
                    slice_stop: int | None = None) → int
```

Return the height that a given line would need if it is rendered in a space with the given width (using line wrapping).

#### Parameters

- **get\_line\_prefix** – None or a *Window.get\_line\_prefix* callable that returns the prefix to be inserted before this line.
- **slice\_stop** – Wrap only “line[:slice\_stop]” and return that partial result. This is needed for scrolling the window correctly when line wrapping.

**Returns** The computed height.

## Other

### Sizing

```
class prompt_toolkit.layout.Dimension (min: int | None = None, max: int | None = None,
                                       weight: int | None = None, preferred: int | None =
                                       None)
```

Specified dimension (width/height) of a user control or window.

The layout engine tries to honor the preferred size. If that is not possible, because the terminal is larger or smaller, it tries to keep in between min and max.

#### Parameters

- **min** – Minimum size.
- **max** – Maximum size.
- **weight** – For a *VSplit/HSplit*, the actual size will be determined by taking the proportion of weights from all the children. E.g. When there are two children, one with a weight of 1, and the other with a weight of 2, the second will always be twice as big as the first, if the min/max values allow it.
- **preferred** – Preferred size.

```
classmethod exact (amount: int) → prompt_toolkit.layout.dimension.Dimension
```

Return a *Dimension* with an exact size. (min, max and preferred set to amount).

`is_zero()` → bool

True if this *Dimension* represents a zero size.

**classmethod** `zero()` → `prompt_toolkit.layout.dimension.Dimension`

Create a dimension that represents a zero size. (Used for ‘invisible’ controls.)

## Margins

**class** `prompt_toolkit.layout.Margin`

Base interface for a margin.

**create\_margin** (*window\_render\_info*: `WindowRenderInfo`, *width*: `int`, *height*: `int`) → `StyleAndTextTuples`

Creates a margin. This should return a list of (style\_str, text) tuples.

### Parameters

- **window\_render\_info** – `WindowRenderInfo` instance, generated after rendering and copying the visible part of the `UIControl` into the `Window`.
- **width** – The width that’s available for this margin. (As reported by `get_width()`.)
- **height** – The height that’s available for this margin. (The height of the `Window`.)

**get\_width** (*get\_ui\_content*: `Callable[[], prompt_toolkit.layout.controls.UIContent]`) → `int`

Return the width that this margin is going to consume.

**Parameters** *get\_ui\_content* – `Callable` that asks the user control to create a `UIContent` instance. This can be used for instance to obtain the number of lines.

**class** `prompt_toolkit.layout.NumberedMargin` (*relative*: `Union[prompt_toolkit.filters.base.Filter, bool]` = `False`, *display\_tildes*: `Union[prompt_toolkit.filters.base.Filter, bool]` = `False`)

Margin that displays the line numbers.

### Parameters

- **relative** – Number relative to the cursor position. Similar to the Vi ‘relativenumber’ option.
- **display\_tildes** – Display tildes after the end of the document, just like Vi does.

**class** `prompt_toolkit.layout.ScrollbarMargin` (*display\_arrows*: `Union[prompt_toolkit.filters.base.Filter, bool]` = `False`, *up\_arrow\_symbol*: `str` = ‘^’, *down\_arrow\_symbol*: `str` = ‘v’)

Margin displaying a scrollbar.

**Parameters** *display\_arrows* – Display scroll up/down arrows.

**class** `prompt_toolkit.layout.ConditionalMargin` (*margin*: `prompt_toolkit.layout.margins.Margin`, *filter*: `Union[prompt_toolkit.filters.base.Filter, bool]`)

Wrapper around other *Margin* classes to show/hide them.

**class** `prompt_toolkit.layout.PromptMargin` (*get\_prompt*: `Callable[[], StyleAndTextTuples]`, *get\_continuation*: `None | Callable[[int, int, bool], StyleAndTextTuples]` = `None`)

[Deprecated]

Create margin that displays a prompt. This can display one prompt at the first line, and a continuation prompt (e.g, just dots) on all the following lines.

This *PromptMargin* implementation has been largely superseded in favor of the *get\_line\_prefix* attribute of *Window*. The reason is that a margin is always a fixed width, while *get\_line\_prefix* can return a variable width prefix in front of every line, making it more powerful, especially for line continuations.

#### Parameters

- **get\_prompt** – Callable returns formatted text or a list of *(style\_str, type)* tuples to be shown as the prompt at the first line.
- **get\_continuation** – Callable that takes three inputs. The width (int), line\_number (int), and is\_soft\_wrap (bool). It should return formatted text or a list of *(style\_str, type)* tuples for the next lines of the input.

**get\_width** (*get\_ui\_content: Callable[[], prompt\_toolkit.layout.controls.UIContent]*) → int  
Width to report to the *Window*.

## Completion Menus

```
class prompt_toolkit.layout.CompletionsMenu (max_height: int | None = None, scroll_offset:
int | Callable[[], int] = 0, extra_filter: FilterOrBool = True, display_arrows: FilterOrBool = False, z_index: int = 100000000)
```

```
class prompt_toolkit.layout.MultiColumnCompletionsMenu (min_rows: int = 3, suggested_max_column_width:
int = 30, show_meta: Union[prompt_toolkit.filters.base.Filter, bool] = True, extra_filter:
Union[prompt_toolkit.filters.base.Filter, bool] = True, z_index: int = 100000000)
```

Container that displays the completions in several columns. When *show\_meta* (a *Filter*) evaluates to True, it shows the meta information at the bottom.

## Processors

Processors are little transformation blocks that transform the fragments list from a buffer before the *BufferControl* will render it to the screen.

They can insert fragments before or after, or highlight fragments by replacing the fragment types.

```
class prompt_toolkit.layout.processors.Processor
    Manipulate the fragments for a given line in a BufferControl.
```

```
    apply_transformation (transformation_input: prompt_toolkit.layout.processors.TransformationInput)
        → prompt_toolkit.layout.processors.Transformation
        Apply transformation. Returns a Transformation instance.
```

Parameters **transformation\_input** – *TransformationInput* object.

```
class prompt_toolkit.layout.processors.TransformationInput (buffer_control:
    BufferControl,
    document: Document, lineno: int,
    source_to_display: SourceToDisplay,
    fragments: StyleAndTextTuples, width: int,
    height: int)
```

#### Parameters

- **buffer\_control** – *BufferControl* instance.
- **lineno** – The number of the line to which we apply the processor.
- **source\_to\_display** – A function that returns the position in the *fragments* for any position in the source string. (This takes previous processors into account.)
- **fragments** – List of fragments that we can transform. (Received from the previous processor.)

```
class prompt_toolkit.layout.processors.Transformation (fragments: StyleAndTextTuples,
    source_to_display: SourceToDisplay | None = None,
    display_to_source: DisplayToSource | None = None)
```

Transformation result, as returned by *Processor.apply\_transformation()*.

**Important:** Always make sure that the length of *document.text* is equal to the length of all the text in *fragments*!

#### Parameters

- **fragments** – The transformed fragments. To be displayed, or to pass to the next processor.
- **source\_to\_display** – Cursor position transformation from original string to transformed string.
- **display\_to\_source** – Cursor position transformed from source string to original string.

```
class prompt_toolkit.layout.processors.DummyProcessor
    A Processor that doesn't do anything.
```

```
class prompt_toolkit.layout.processors.HighlightSearchProcessor
    Processor that highlights search matches in the document. Note that this doesn't support multiline search matches yet.
```

The style classes 'search' and 'search.current' will be applied to the content.

```
class prompt_toolkit.layout.processors.HighlightIncrementalSearchProcessor
    Highlight the search terms that are used for highlighting the incremental search. The style class 'incsearch' will be applied to the content.
```

Important: this requires the *preview\_search=True* flag to be set for the *BufferControl*. Otherwise, the cursor position won't be set to the search match while searching, and nothing happens.

```
class prompt_toolkit.layout.processors.HighlightSelectionProcessor
    Processor that highlights the selection in the document.
```

```
class prompt_toolkit.layout.processors.PasswordProcessor (char: str = '*')
    Processor that masks the input. (For passwords.)
```

**Parameters** **char** – (string) Character to be used. “\*” by default.

```
class prompt_toolkit.layout.processors.HighlightMatchingBracketProcessor (chars: str = '[](){}<>', max_cursor_distance: int = 1000)
```

When the cursor is on or right after a bracket, it highlights the matching bracket.

**Parameters** **max\_cursor\_distance** – Only highlight matching brackets when the cursor is within this distance. (From inside a *Processor*, we can’t know which lines will be visible on the screen. But we also don’t want to scan the whole document for matching brackets on each key press, so we limit to this value.)

```
class prompt_toolkit.layout.processors.DisplayMultipleCursors
```

When we’re in Vi block insert mode, display all the cursors.

```
class prompt_toolkit.layout.processors.BeforeInput (text: Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str], Callable[[prompt_toolkit.mouse_events.MouseEvent], NotImplementedOrNone]]], Callable[[], Any], None], style: str = "")
```

Insert text before the input.

#### Parameters

- **text** – This can be either plain text or formatted text (or a callable that returns any of those).
- **style** – style to be applied to this prompt/prefix.

```
class prompt_toolkit.layout.processors.ShowArg
```

Display the ‘arg’ in front of the input.

This was used by the *PromptSession*, but now it uses the *Window.get\_line\_prefix* function instead.

```
class prompt_toolkit.layout.processors.AfterInput (text: Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str], Callable[[prompt_toolkit.mouse_events.MouseEvent], NotImplementedOrNone]]], Callable[[], Any], None], style: str = "")
```

Insert text after the input.

#### Parameters

- **text** – This can be either plain text or formatted text (or a callable that returns any of those).
- **style** – style to be applied to this prompt/prefix.

```
class prompt_toolkit.layout.processors.AppendAutoSuggestion (style: str =
    'class:auto-
    suggestion')
```

Append the auto suggestion to the input. (The user can then press the right arrow the insert the suggestion.)

```
class prompt_toolkit.layout.processors.ConditionalProcessor (processor:
    prompt_toolkit.layout.processors.Processor,
    filter:
    Union[prompt_toolkit.filters.base.Filter,
    bool])
```

Processor that applies another processor, according to a certain condition. Example:

```
# Create a function that returns whether or not the processor should
# currently be applied.
def highlight_enabled():
    return true_or_false

# Wrapped it in a `ConditionalProcessor` for usage in a `BufferControl`.
BufferControl(input_processors=[
    ConditionalProcessor(HighlightSearchProcessor(),
        Condition(highlight_enabled))])
```

#### Parameters

- **processor** – *Processor* instance.
- **filter** – *Filter* instance.

```
class prompt_toolkit.layout.processors.ShowLeadingWhiteSpaceProcessor (get_char:
    Callable[[],
    str] |
    None
    =
    None,
    style:
    str =
    'class:leading-
    whitespace')
```

Make leading whitespace visible.

**Parameters** **get\_char** – Callable that returns one character.

```
class prompt_toolkit.layout.processors.ShowTrailingWhiteSpaceProcessor (get_char:
    Callable[[],
    str]
    |
    None
    =
    None,
    style:
    str
    =
    'class:trailing-
    whitespace')
```

Make trailing whitespace visible.

**Parameters** **get\_char** – Callable that returns one character.

```
class prompt_toolkit.layout.processors.TabsProcessor (tabstop: int | Callable[[], int]  
                                                    = 4, char1: str | Callable[[],  
                                                    str] = '\', char2: str |  
                                                    Callable[[], str] = '', style: str  
                                                    = 'class:tab')
```

Render tabs as spaces (instead of ^I) or make them visible (for instance, by replacing them with dots.)

#### Parameters

- **tabstop** – Horizontal space taken by a tab. (*int* or callable that returns an *int*).
- **char1** – Character or callable that returns a character (text of length one). This one is used for the first space taken by the tab.
- **char2** – Like *char1*, but for the rest of the space.

```
class prompt_toolkit.layout.processors.ReverseSearchProcessor
```

Process to display the “(reverse-i-search)‘...‘:...” stuff around the search buffer.

Note: This processor is meant to be applied to the BufferControl that contains the search buffer, it’s not meant for the original input.

```
class prompt_toolkit.layout.processors.DynamicProcessor (get_processor:  
                                                         Callable[[], Processor  
                                                         | None])
```

Processor class that dynamically returns any Processor.

**Parameters** **get\_processor** – Callable that returns a *Processor* instance.

```
prompt_toolkit.layout.processors.merge_processors (processors: list[Processor]) →  
Processor
```

Merge multiple *Processor* objects into one.

## Utils

```
prompt_toolkit.layout.utils.explode_text_fragments (fragments: Iterable[_T]) →  
prompt_toolkit.layout.utils._ExplodedList[~_T][_T]
```

Turn a list of (style\_str, text) tuples into another list where each string is exactly one character.

It should be fine to call this function several times. Calling this on a list that is already exploded, is a null operation.

**Parameters** **fragments** – List of (style, text) tuples.

## Screen

```
class prompt_toolkit.layout.screen.Screen (default_char: Char | None = None, ini-  
                                           tial_width: int = 0, initial_height: int = 0)
```

Two dimensional buffer of *Char* instances.

```
append_style_to_content (style_str: str) → None
```

For all the characters in the screen. Set the style string to the given *style\_str*.

```
cursor_positions = None
```

Position of the cursor.

```
draw_all_floats () → None
```

Draw all float functions in order of z-index.

**draw\_with\_z\_index** (*z\_index: int, draw\_func: Callable[[], None]*) → None

Add a draw-function for a *Window* which has a  $\geq 0$  *z\_index*. This will be postponed until *draw\_all\_floats* is called.

**fill\_area** (*write\_position: prompt\_toolkit.layout.screen.WritePosition, style: str = "", after: bool = False*) → None

Fill the content of this area, using the given *style*. The style is prepended before whatever was here before.

**get\_cursor\_position** (*window: Window*) → Point

Get the cursor position for a given window. Returns a *Point*.

**get\_menu\_position** (*window: Window*) → Point

Get the menu position for a given window. (This falls back to the cursor position if no menu position was set.)

**menu\_positions = None**

(Optional) Where to position the menu. E.g. at the start of a completion. (We can't use the cursor position, because we don't want the completion menu to change its position when we browse through all the completions.)

**set\_cursor\_position** (*window: Window, position: Point*) → None

Set the cursor position for a given window.

**set\_menu\_position** (*window: Window, position: Point*) → None

Set the cursor position for a given window.

**show\_cursor = None**

Visibility of the cursor.

**width = None**

Currently used width/height of the screen. This will increase when data is written to the screen.

**zero\_width\_escapes = None**

Escape sequences to be injected.

**class** prompt\_toolkit.layout.screen.**Char** (*char: str = ' ', style: str = ""*)

Represent a single character in a *Screen*.

This should be considered immutable.

#### Parameters

- **char** – A single character (can be a double-width character).
- **style** – A style string. (Can contain classnames.)

### 3.11.18 Widgets

Collection of reusable components for building full screen applications. These are higher level abstractions on top of the *prompt\_toolkit.layout* module.

Most of these widgets implement the `__pt_container__` method, which makes it possible to embed these in the layout like any other container.

```
class prompt_toolkit.widgets.TextArea (text: str = "", multiline: FilterOrBool = True,
password: FilterOrBool = False, lexer: Lexer |
None = None, auto_suggest: AutoSuggest | None =
None, completer: Completer | None = None, complete_while_typing: FilterOrBool = True, validator:
Validator | None = None, accept_handler: BufferAcceptHandler | None = None, history: History |
None = None, focusable: FilterOrBool = True, focus_on_click: FilterOrBool = False, wrap_lines: FilterOrBool = True, read_only: FilterOrBool = False,
width: AnyDimension = None, height: AnyDimension = None, dont_extend_height: FilterOrBool = False, dont_extend_width: FilterOrBool = False,
line_numbers: bool = False, get_line_prefix: GetLinePrefixCallable | None = None, scrollbar: bool = False, style: str = "", search_field: SearchToolbar |
None = None, preview_search: FilterOrBool = True, prompt: AnyFormattedText = "", input_processors: list[Processor] | None = None, name: str = "")
```

A simple input field.

This is a higher level abstraction on top of several other classes with sane defaults.

This widget does have the most common options, but it does not intend to cover every single use case. For more configurations options, you can always build a text area manually, using a [Buffer](#), [BufferControl](#) and [Window](#).

Buffer attributes:

#### Parameters

- **text** – The initial text.
- **multiline** – If *True*, allow multiline input.
- **completer** – *Completer* instance for auto completion.
- **complete\_while\_typing** – Boolean.
- **accept\_handler** – Called when *Enter* is pressed (This should be a callable that takes a buffer as input).
- **history** – *History* instance.
- **auto\_suggest** – *AutoSuggest* instance for input suggestions.

BufferControl attributes:

#### Parameters

- **password** – When *True*, display using asterisks.
- **focusable** – When *True*, allow this widget to receive the focus.
- **focus\_on\_click** – When *True*, focus after mouse click.
- **input\_processors** – *None* or a list of *Processor* objects.
- **validator** – *None* or a *Validator* object.

Window attributes:

#### Parameters

- **lexer** – *Lexer* instance for syntax highlighting.

- **wrap\_lines** – When *True*, don't scroll horizontally, but wrap lines.
- **width** – Window width. (*Dimension* object.)
- **height** – Window height. (*Dimension* object.)
- **scrollbar** – When *True*, display a scroll bar.
- **style** – A style string.
- **dont\_extend\_width** – When *True*, don't take up more width than the preferred width reported by the control.
- **dont\_extend\_height** – When *True*, don't take up more width than the preferred height reported by the control.
- **get\_line\_prefix** – None or a callable that returns formatted text to be inserted before a line. It takes a line number (int) and a wrap\_count and returns formatted text. This can be used for implementation of line continuations, things like Vim “breakindent” and so on.

Other attributes:

**Parameters** **search\_field** – An optional *SearchToolbar* object.

**accept\_handler**

The accept handler. Called when the user accepts the input.

**document**

The *Buffer* document (text + cursor position).

**text**

The *Buffer* text.

```
class prompt_toolkit.widgets.Label (text: AnyFormattedText, style: str = "", width: AnyDimension = None, dont_extend_height: bool = True, dont_extend_width: bool = False, align: WindowAlign | Callable[[], WindowAlign] = <WindowAlign.LEFT: 'LEFT'>, wrap_lines: FilterOrBool = True)
```

Widget that displays the given text. It is not editable or focusable.

**Parameters**

- **text** – Text to display. Can be multiline. All value types accepted by *prompt\_toolkit.layout.FormattedTextControl* are allowed, including a callable.
- **style** – A style string.
- **width** – When given, use this width, rather than calculating it from the text size.
- **dont\_extend\_width** – When *True*, don't take up more width than preferred, i.e. the length of the longest line of the text, or value of *width* parameter, if given. *True* by default
- **dont\_extend\_height** – When *True*, don't take up more width than the preferred height, i.e. the number of lines of the text. *False* by default.

```
class prompt_toolkit.widgets.Button (text: str, handler: Callable[[], None] | None = None, width: int = 12, left_symbol: str = '<', right_symbol: str = '>')
```

Clickable button.

**Parameters**

- **text** – The caption for the button.

- **handler** – *None* or callable. Called when the button is clicked. No parameters are passed to this callable. Use for instance Python’s *functools.partial* to pass parameters to this callable if needed.
- **width** – Width of the button.

```
class prompt_toolkit.widgets.Frame (body: AnyContainer, title: AnyFormattedText = "", style: str = "", width: AnyDimension = None, height: AnyDimension = None, key_bindings: KeyBindings | None = None, modal: bool = False)
```

Draw a border around any container, optionally with a title text.

Changing the title and body of the frame is possible at runtime by assigning to the *body* and *title* attributes of this class.

#### Parameters

- **body** – Another container object.
- **title** – Text to be displayed in the top of the frame (can be formatted text).
- **style** – Style string to be applied to this widget.

```
class prompt_toolkit.widgets.Shadow (body: Union[prompt_toolkit.layout.containers.Container, MagicContainer])
```

Draw a shadow underneath/behind this container. (This applies *class:shadow* to the cells under the shadow. The Style should define the colors for the shadow.)

**Parameters** **body** – Another container object.

```
class prompt_toolkit.widgets.Box (body: AnyContainer, padding: AnyDimension = None, padding_left: AnyDimension = None, padding_right: AnyDimension = None, padding_top: AnyDimension = None, padding_bottom: AnyDimension = None, width: AnyDimension = None, height: AnyDimension = None, style: str = "", char: None | str | Callable[[], str] = None, modal: bool = False, key_bindings: KeyBindings | None = None)
```

Add padding around a container.

This also makes sure that the parent can provide more space than required by the child. This is very useful when wrapping a small element with a fixed size into a *VSplit* or *HSplit* object. The *HSplit* and *VSplit* try to make sure to adapt respectively the width and height, possibly shrinking other elements. Wrapping something in a *Box* makes it flexible.

#### Parameters

- **body** – Another container object.
- **padding** – The margin to be used around the body. This can be overridden by *padding\_left*, *padding\_right*, *padding\_top* and *padding\_bottom*.
- **style** – A style string.
- **char** – Character to be used for filling the space around the body. (This is supposed to be a character with a terminal width of 1.)

```
class prompt_toolkit.widgets.VerticalLine
```

A simple vertical line with a width of 1.

```
class prompt_toolkit.widgets.HorizontalLine
```

A simple horizontal line with a height of 1.

**class** `prompt_toolkit.widgets.RadioList` (*values*: Sequence[tuple[\_T, AnyFormattedText]], *default*: \_T | None = None)

List of radio buttons. Only one can be checked at the same time.

**Parameters** **values** – List of (value, label) tuples.

**class** `prompt_toolkit.widgets.Checkbox` (*text*: Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str], Callable[[prompt\_toolkit.mouse\_events.MouseEvent], NotImplementedOrNone]]], Callable[[], Any], None] = "", *checked*: bool = False)

Backward compatibility util: creates a 1-sized CheckboxList

**Parameters** **text** – the text

**class** `prompt_toolkit.widgets.SearchToolbar` (*search\_buffer*: Buffer | None = None, *vi\_mode*: bool = False, *text\_if\_not\_searching*: AnyFormattedText = "", *forward\_search\_prompt*: AnyFormattedText = 'I-search: ', *backward\_search\_prompt*: AnyFormattedText = 'I-search backward: ', *ignore\_case*: FilterOrBool = False)

**Parameters**

- **vi\_mode** – Display ‘/’ and ‘?’ instead of I-search.
- **ignore\_case** – Search case insensitive.

**class** `prompt_toolkit.widgets.SystemToolbar` (*prompt*: Union[str, MagicFormattedText, List[Union[Tuple[str, str], Tuple[str, str], Callable[[prompt\_toolkit.mouse\_events.MouseEvent], NotImplementedOrNone]]], Callable[[], Any], None] = 'Shell command: ', *enable\_global\_bindings*: Union[prompt\_toolkit.filters.base.Filter, bool] = True)

Toolbar for a system prompt.

**Parameters** **prompt** – Prompt to be displayed to the user.

**class** `prompt_toolkit.widgets.MenuContainer` (*body*: AnyContainer, *menu\_items*: list[MenuItem], *floats*: list[Float] | None = None, *key\_bindings*: KeyBindingsBase | None = None)

**Parameters**

- **floats** – List of extra Float objects to display.
- **menu\_items** – List of *MenuItem* objects.

### 3.11.19 Filters

Filters decide whether something is active or not (they decide about a boolean state). This is used to enable/disable features, like key bindings, parts of the layout and other stuff. For instance, we could have a *HasSearch* filter attached to some part of the layout, in order to show that part of the user interface only while the user is searching.

Filters are made to avoid having to attach callbacks to all event in order to propagate state. However, they are lazy, they don't automatically propagate the state of what they are observing. Only when a filter is called (it's actually a callable), it will calculate its value. So, its not really reactive programming, but it's made to fit for this framework.

Filters can be chained using `&` and `|` operations, and inverted using the `~` operator, for instance:

```
filter = has_focus('default') & ~ has_selection
```

`prompt_toolkit.filters.has_focus` (*value: FocusableElement*) → Condition  
Enable when this buffer has the focus.

`prompt_toolkit.filters.in_editing_mode` (*editing\_mode: prompt\_toolkit.enums.EditingMode*) → `prompt_toolkit.filters.base.Condition`  
Check whether a given editing mode is active. (Vi or Emacs.)

**class** `prompt_toolkit.filters.Filter`  
Base class for any filter to activate/deactivate a feature, depending on a condition.  
The return value of `__call__` will tell if the feature should be active.

**class** `prompt_toolkit.filters.Never`  
Never enable feature.

**class** `prompt_toolkit.filters.Always`  
Always enable feature.

**class** `prompt_toolkit.filters.Condition` (*func: Callable[[], bool]*)  
Turn any callable into a Filter. The callable is supposed to not take any arguments.

This can be used as a decorator:

```
@Condition
def feature_is_active(): # `feature_is_active` becomes a Filter.
    return True
```

**Parameters** `func` – Callable which takes no inputs and returns a boolean.

`prompt_toolkit.filters.is_true` (*value: Union[prompt\_toolkit.filters.base.Filter, bool]*) → bool  
Test whether *value* is True. In case of a Filter, call it.

**Parameters** `value` – Boolean or *Filter* instance.

`prompt_toolkit.filters.to_filter` (*bool\_or\_filter: Union[prompt\_toolkit.filters.base.Filter, bool]*) → `prompt_toolkit.filters.base.Filter`  
Accept both booleans and Filters as input and turn it into a Filter.

`prompt_toolkit.filters.HasFocus` (*value: FocusableElement*) → Condition  
Enable when this buffer has the focus.

`prompt_toolkit.filters.InEditingMode` (*editing\_mode: prompt\_toolkit.enums.EditingMode*) → `prompt_toolkit.filters.base.Condition`  
Check whether a given editing mode is active. (Vi or Emacs.)

**class** `prompt_toolkit.filters.Filter`  
Base class for any filter to activate/deactivate a feature, depending on a condition.  
The return value of `__call__` will tell if the feature should be active.

**class** `prompt_toolkit.filters.Condition` (*func: Callable[[], bool]*)  
Turn any callable into a Filter. The callable is supposed to not take any arguments.

This can be used as a decorator:

```
@Condition
def feature_is_active(): # `feature_is_active` becomes a Filter.
    return True
```

**Parameters** **func** – Callable which takes no inputs and returns a boolean.

`prompt_toolkit.filters.utils.to_filter` (*bool\_or\_filter*: Union[prompt\_toolkit.filters.base.Filter, bool]) → prompt\_toolkit.filters.base.Filter  
Accept both booleans and Filters as input and turn it into a Filter.

`prompt_toolkit.filters.utils.is_true` (*value*: Union[prompt\_toolkit.filters.base.Filter, bool]) → bool  
Test whether *value* is True. In case of a Filter, call it.

**Parameters** **value** – Boolean or *Filter* instance.

Filters that accept a *Application* as argument.

`prompt_toolkit.filters.app.has_focus` (*value*: FocusableElement) → Condition  
Enable when this buffer has the focus.

`prompt_toolkit.filters.app.in_editing_mode` (*editing\_mode*: prompt\_toolkit.enums.EditingMode) → prompt\_toolkit.filters.base.Condition  
Check whether a given editing mode is active. (Vi or Emacs.)

### 3.11.20 Key binding

**class** `prompt_toolkit.key_binding.KeyBindingsBase`

Interface for a KeyBindings.

**bindings**

List of *Binding* objects. (These need to be exposed, so that *KeyBindings* objects can be merged together.)

**get\_bindings\_for\_keys** (*keys*: KeysTuple) → list[Binding]

Return a list of key bindings that can handle these keys. (This return also inactive bindings, so the *filter* still has to be called, for checking it.)

**Parameters** **keys** – tuple of keys.

**get\_bindings\_starting\_with\_keys** (*keys*: KeysTuple) → list[Binding]

Return a list of key bindings that handle a key sequence starting with *keys*. (It does only return bindings for which the sequences are longer than *keys*. And like *get\_bindings\_for\_keys*, it also includes inactive bindings.)

**Parameters** **keys** – tuple of keys.

**class** `prompt_toolkit.key_binding.KeyBindings`

A container for a set of key bindings.

Example usage:

```
kb = KeyBindings()

@kb.add('c-t')
def _(event):
    print('Control-T pressed')

@kb.add('c-a', 'c-b')
def _(event):
    print('Control-A pressed, followed by Control-B')

@kb.add('c-x', filter=is_searching)
def _(event):
    print('Control-X pressed') # Works only if we are searching.
```

**add** (\*keys, filter: FilterOrBool = True, eager: FilterOrBool = False, is\_global: FilterOrBool = False, save\_before: Callable[[KeyPressEvent], bool] = <function KeyBindings.<lambda>>, record\_in\_macro: FilterOrBool = True) → Callable[[T], T]  
Decorator for adding a key bindings.

#### Parameters

- **filter** – *Filter* to determine when this key binding is active.
- **eager** – *Filter* or *bool*. When True, ignore potential longer matches when this key binding is hit. E.g. when there is an active eager key binding for Ctrl-X, execute the handler immediately and ignore the key binding for Ctrl-X Ctrl-E of which it is a prefix.
- **is\_global** – When this key bindings is added to a *Container* or *Control*, make it a global (always active) binding.
- **save\_before** – Callable that takes an *Event* and returns True if we should save the current buffer, before handling the event. (That's the default.)
- **record\_in\_macro** – Record these key bindings when a macro is being recorded. (True by default.)

**add\_binding** (\*keys, filter: FilterOrBool = True, eager: FilterOrBool = False, is\_global: FilterOrBool = False, save\_before: Callable[[KeyPressEvent], bool] = <function KeyBindings.<lambda>>, record\_in\_macro: FilterOrBool = True) → Callable[[T], T]  
Decorator for adding a key bindings.

#### Parameters

- **filter** – *Filter* to determine when this key binding is active.
- **eager** – *Filter* or *bool*. When True, ignore potential longer matches when this key binding is hit. E.g. when there is an active eager key binding for Ctrl-X, execute the handler immediately and ignore the key binding for Ctrl-X Ctrl-E of which it is a prefix.
- **is\_global** – When this key bindings is added to a *Container* or *Control*, make it a global (always active) binding.
- **save\_before** – Callable that takes an *Event* and returns True if we should save the current buffer, before handling the event. (That's the default.)
- **record\_in\_macro** – Record these key bindings when a macro is being recorded. (True by default.)

**get\_bindings\_for\_keys** (keys: KeysTuple) → list[Binding]

Return a list of key bindings that can handle this key. (This return also inactive bindings, so the *filter* still has to be called, for checking it.)

**Parameters** **keys** – tuple of keys.

**get\_bindings\_starting\_with\_keys** (keys: KeysTuple) → list[Binding]

Return a list of key bindings that handle a key sequence starting with *keys*. (It does only return bindings for which the sequences are longer than *keys*. And like *get\_bindings\_for\_keys*, it also includes inactive bindings.)

**Parameters** **keys** – tuple of keys.

**remove** (\*args) → None

Remove a key binding.

This expects either a function that was given to *add* method as parameter or a sequence of key bindings.

Raises *ValueError* when no bindings was found.

Usage:

```
remove(handler) # Pass handler.
remove('c-x', 'c-a') # Or pass the key bindings.
```

**remove\_binding**(\*args) → None

Remove a key binding.

This expects either a function that was given to *add* method as parameter or a sequence of key bindings.

Raises *ValueError* when no bindings was found.

Usage:

```
remove(handler) # Pass handler.
remove('c-x', 'c-a') # Or pass the key bindings.
```

**class** prompt\_toolkit.key\_binding.**ConditionalKeyBindings**(key\_bindings: *prompt\_toolkit.key\_binding.key\_bindings.KeyBindings*, filter: *Union[prompt\_toolkit.filters.base.Filter, bool] = True*)

Wraps around a *KeyBindings*. Disable/enable all the key bindings according to the given (additional) filter.:

```
@Condition
def setting_is_true():
    return True # or False

registry = ConditionalKeyBindings(key_bindings, setting_is_true)
```

When new key bindings are added to this object. They are also enable/disabled according to the given *filter*.

#### Parameters

- **registries** – List of *KeyBindings* objects.
- **filter** – *Filter* object.

**prompt\_toolkit.key\_binding.merge\_key\_bindings**(bindings: *Sequence[prompt\_toolkit.key\_binding.key\_bindings.KeyBindingsBase]*) → *prompt\_toolkit.key\_binding.key\_bindings.\_MergedKeyBinding*

Merge multiple Keybinding objects together.

Usage:

```
bindings = merge_key_bindings([bindings1, bindings2, ...])
```

**class** prompt\_toolkit.key\_binding.**DynamicKeyBindings**(get\_key\_bindings: *Callable[[KeyBindingsBase | None]]*)

KeyBindings class that can dynamically returns any *KeyBindings*.

**Parameters** **get\_key\_bindings** – Callable that returns a *KeyBindings* instance.

Default key bindings.:

```
key_bindings = load_key_bindings()
app = Application(key_bindings=key_bindings)
```

**prompt\_toolkit.key\_binding.defaults.load\_key\_bindings**() → *prompt\_toolkit.key\_binding.key\_bindings.KeyBindings*

Create a *KeyBindings* object that contains the default key bindings.

**class** prompt\_toolkit.key\_binding.vi\_state.**InputMode**  
An enumeration.

**class** `prompt_toolkit.key_binding.vi_state.ViState`

Mutable class to hold the state of the Vi navigation.

**input\_mode**

Get *InputMode*.

**last\_character\_find = None**

None or *CharacterFind* instance. (This is used to repeat the last search in Vi mode, by pressing the ‘n’ or ‘N’ in navigation mode.)

**named\_registers = None**

Named registers. Maps register name (e.g. ‘a’) to *ClipboardData* instances.

**reset ()** → None

Reset state, go back to the given mode. INSERT by default.

**tilde\_operator = None**

When true, make ~ act as an operator.

**waiting\_for\_digraph = None**

Waiting for digraph.

An *KeyProcessor* receives callbacks for the keystrokes parsed from the input in the *InputStream* instance.

The *KeyProcessor* will according to the implemented keybindings call the correct callbacks when new key presses are feed through *feed*.

**class** `prompt_toolkit.key_binding.key_processor.KeyProcessor` (*key\_bindings*:

*prompt\_toolkit.key\_binding.key\_bindings.KeyBindings*)  
Statemachine that receives *KeyPress* instances and according to the key bindings in the given *KeyBindings*, calls the matching handlers.

```
p = KeyProcessor(key_bindings)

# Send keys into the processor.
p.feed(KeyPress(Keys.ControlX, ''))
p.feed(KeyPress(Keys.ControlC, ''))

# Process all the keys in the queue.
p.process_keys()

# Now the ControlX-ControlC callback will be called if this sequence is
# registered in the key bindings.
```

**Parameters** *key\_bindings* – *KeyBindingsBase* instance.

**empty\_queue ()** → list[*KeyPress*]

Empty the input queue. Return the unprocessed input.

**feed** (*key\_press*: *prompt\_toolkit.key\_binding.key\_processor.KeyPress*, *first*: bool = False) → None

Add a new *KeyPress* to the input queue. (Don’t forget to call *process\_keys* in order to process the queue.)

**Parameters** *first* – If true, insert before everything else.

**feed\_multiple** (*key\_presses*: list[*KeyPress*], *first*: bool = False) → None

**Parameters** *first* – If true, insert before everything else.

**process\_keys ()** → None

Process all the keys in the *input\_queue*. (To be called after *feed*.)

**Note: because of the *feed/process\_keys* separation, it is possible to call *feed* from inside a key binding.**  
This function keeps looping until the queue is empty.

**send\_sigint** () → None

Send SIGINT. Immediately call the SIGINT key handler.

**class** prompt\_toolkit.key\_binding.key\_processor.**KeyPress** (*key: Keys | str, data: str | None = None*)

#### Parameters

- **key** – A *Keys* instance or text (one character).
- **data** – The received string on stdin. (Often vt100 escape codes.)

**class** prompt\_toolkit.key\_binding.key\_processor.**KeyPressEvent** (*key\_processor\_ref: weakref.ReferenceType[KeyPressor], arg: str | None, key\_sequence: list[KeyPress], previous\_key\_sequence: list[KeyPress], is\_repeat: bool*)

Key press event, delivered to key bindings.

#### Parameters

- **key\_processor\_ref** – Weak reference to the *KeyPressor*.
- **arg** – Repetition argument.
- **key\_sequence** – List of *KeyPress* instances.
- **previouskey\_sequence** – Previous list of *KeyPress* instances.
- **is\_repeat** – True when the previous event was delivered to the same handler.

#### app

The current *Application* object.

**append\_to\_arg\_count** (*data: str*) → None

Add digit to the input argument.

**Parameters** **data** – the typed digit as string

#### arg

Repetition argument.

#### arg\_present

True if repetition argument was explicitly provided.

#### cli

For backward-compatibility.

#### current\_buffer

The current buffer.

#### is\_repeat = None

True when the previous key sequence was handled by the same handler.

### 3.11.21 Eventloop

```
prompt_toolkit.eventloop.run_in_executor_with_context (func: Callable[..., _T],
*args, loop: asyncio.AbstractEventLoop | None
= None) → Awaitable[_T]
```

Run a function in an executor, but make sure it uses the same contextvars. This is required so that the function will see the right application.

See also: <https://bugs.python.org/issue34014>

```
prompt_toolkit.eventloop.call_soon_threadsafe (func: Callable[[], None],
max_postpone_time: float | None =
None, loop: asyncio.AbstractEventLoop |
None = None) → None
```

Wrapper around `asyncio`'s `call_soon_threadsafe`.

This takes a `max_postpone_time` which can be used to tune the urgency of the method.

`Asyncio` runs tasks in first-in-first-out. However, this is not what we want for the render function of the `prompt_toolkit` UI. Rendering is expensive, but since the UI is invalidated very often, in some situations we render the UI too often, so much that the rendering CPU usage slows down the rest of the processing of the application. (Pymux is an example where we have to balance the CPU time spend on rendering the UI, and parsing process output.) However, we want to set a deadline value, for when the rendering should happen. (The UI should stay responsive).

```
prompt_toolkit.eventloop.get_traceback_from_context (context: dict[str, Any]) → Trace-
backType | None
```

Get the traceback object from the context.

Similar to `PyOS_InputHook` of the Python API, we can plug in an input hook in the `asyncio` event loop.

The way this works is by using a custom 'selector' that runs the other event loop until the real selector is ready.

It's the responsibility of this event hook to return when there is input ready. There are two ways to detect when input is ready:

The `inputhook` itself is a callable that receives an `InputHookContext`. This callable should run the other event loop, and return when the main loop has stuff to do. There are two ways to detect when to return:

- Call the `input_is_ready` method periodically. Quit when this returns `True`.
- Add the `fileno` as a watch to the external eventloop. Quit when file descriptor becomes readable. (But don't read from it.)

Note that this is not the same as checking for `sys.stdin.fileno()`. The eventloop of `prompt-toolkit` allows thread-based executors, for example for asynchronous autocompletion. When the completion for instance is ready, we also want `prompt-toolkit` to gain control again in order to display that.

```
prompt_toolkit.eventloop.inputhook.new_eventloop_with_inputhook (inputhook:
Callable[[prompt_toolkit.eventloop.inp
None])
→ asyncio.
events.AbstractEventLoop
```

Create a new event loop with the given `inputhook`.

```
prompt_toolkit.eventloop.inputhook.set_eventloop_with_inputhook (inputhook:
Callable[[prompt_toolkit.eventloop.inp
None])
→ asyncio.
events.AbstractEventLoop
```

Create a new event loop with the given `inputhook`, and activate it.

```
class prompt_toolkit.eventloop.inputhook.InputHookSelector (selector: selectors.BaseSelector,  
inputhook: Callable[[prompt_toolkit.eventloop.inputhook. None]])
```

Usage:

```
selector = selectors.SelectSelector() loop = asyncio.SelectorEventLoop(InputHookSelector(selector,  
inputhook)) asyncio.set_event_loop(loop)
```

**close** () → None

Clean up resources.

```
class prompt_toolkit.eventloop.inputhook.InputHookContext (fileno: int, input_is_ready:  
Callable[[], bool])
```

Given as a parameter to the inputhook.

```
prompt_toolkit.eventloop.utils.run_in_executor_with_context (func: Callable[...,  
_T], *args,  
loop: asyncio.AbstractEventLoop | None = None) → Awaitable[_T]
```

Run a function in an executor, but make sure it uses the same contextvars. This is required so that the function will see the right application.

See also: <https://bugs.python.org/issue34014>

```
prompt_toolkit.eventloop.utils.call_soon_threadsafe (func: Callable[[], None],  
max_postpone_time: float | None = None, loop: asyncio.AbstractEventLoop | None =  
None) → None
```

Wrapper around asyncio's `call_soon_threadsafe`.

This takes a `max_postpone_time` which can be used to tune the urgency of the method.

Asyncio runs tasks in first-in-first-out. However, this is not what we want for the render function of the prompt\_toolkit UI. Rendering is expensive, but since the UI is invalidated very often, in some situations we render the UI too often, so much that the rendering CPU usage slows down the rest of the processing of the application. (Pymux is an example where we have to balance the CPU time spend on rendering the UI, and parsing process output.) However, we want to set a deadline value, for when the rendering should happen. (The UI should stay responsive).

```
prompt_toolkit.eventloop.utils.get_traceback_from_context (context: dict[str, Any]  
→ TracebackType | None
```

Get the traceback object from the context.

### 3.11.22 Input

```
class prompt_toolkit.input.Input  
Abstraction for any input.
```

An instance of this class can be given to the constructor of a `Application` and will also be passed to the `EventLoop`.

```
attach (input_ready_callback: Callable[[], None]) → AbstractContextManager[None]  
Return a context manager that makes this input active in the current event loop.
```

**close** () → None  
Close input.

**closed**  
Should be true when the input stream is closed.

**cooked\_mode** () → AbstractContextManager[None]  
Context manager that turns the input into cooked mode.

**detach** () → AbstractContextManager[None]  
Return a context manager that makes sure that this input is not active in the current event loop.

**fileno** () → int  
Fileno for putting this in an event loop.

**flush** () → None  
The event loop can call this when the input has to be flushed.

**flush\_keys** () → list[KeyPress]  
Flush the underlying parser. and return the pending keys. (Used for vt100 input.)

**raw\_mode** () → AbstractContextManager[None]  
Context manager that turns the input into raw mode.

**read\_keys** () → list[KeyPress]  
Return a list of Key objects which are read/parsed from the input.

**typeahead\_hash** () → str  
Identifier for storing type ahead key presses.

**class** prompt\_toolkit.input.DummyInput  
Input for use in a *DummyApplication*

If used in an actual application, it will make the application render itself once and exit immediately, due to an *EOFError*.

prompt\_toolkit.input.create\_input (stdin: TextIO | None = None, always\_prefer\_tty: bool = False) → Input

Create the appropriate *Input* object for the current os/environment.

**Parameters** **always\_prefer\_tty** – When set, if *sys.stdin* is connected to a Unix *pipe*, check whether *sys.stdout* or *sys.stderr* are connected to a pseudo terminal. If so, open the tty for reading instead of reading for *sys.stdin*. (We can open *stdout* or *stderr* for reading, this is how a *\$PAGER* works.)

prompt\_toolkit.input.create\_pipe\_input () → AbstractContextManager[prompt\_toolkit.input.base.PipeInput]

Create an input pipe. This is mostly useful for unit testing.

Usage:

```
with create_pipe_input() as input:
    input.send_text('inputdata')
```

Breaking change: In prompt\_toolkit 3.0.28 and earlier, this was returning the *PipeInput* directly, rather than through a context manager.

**class** prompt\_toolkit.input.vt100.Vt100Input (stdin: TextIO)

Vt100 input for Posix systems. (This uses a posix file descriptor that can be registered in the event loop.)

**attach** (input\_ready\_callback: Callable[[], None]) → AbstractContextManager[None]  
Return a context manager that makes this input active in the current event loop.

**detach** () → AbstractContextManager[None]

Return a context manager that makes sure that this input is not active in the current event loop.

**flush\_keys** () → list[KeyPress]

Flush pending keys and return them. (Used for flushing the ‘escape’ key.)

**read\_keys** () → list[KeyPress]

Read list of KeyPress.

**class** prompt\_toolkit.input.vt100.**raw\_mode** (fileno: int)

```
with raw_mode(stdin):
    ''' the pseudo-terminal stdin is now used in raw mode '''
```

We ignore errors when executing `tcgetattr` fails.

**class** prompt\_toolkit.input.vt100.**cooked\_mode** (fileno: int)

The opposite of `raw_mode`, used when we need cooked mode inside a `raw_mode` block. Used in `Application.run_in_terminal`:

```
with cooked_mode(stdin):
    ''' the pseudo-terminal stdin is now used in cooked mode. '''
```

Parser for VT100 input stream.

**class** prompt\_toolkit.input.vt100\_parser.**Vt100Parser** (feed\_key\_callback:

Callable[[prompt\_toolkit.key\_binding.key\_processor.KeyPress, None]])

Parser for VT100 input stream. Data can be fed through the `feed` method and the given callback will be called with KeyPress objects.

```
def callback(key):
    pass
i = Vt100Parser(callback)
i.feed('data{...}')
```

**Attr feed\_key\_callback** Function that will be called when a key is parsed.

**feed** (data: str) → None

Feed the input stream.

**Parameters data** – Input string (unicode).

**feed\_and\_flush** (data: str) → None

Wrapper around `feed` and `flush`.

**flush** () → None

Flush the buffer of the input stream.

This will allow us to handle the escape key (or maybe meta) sooner. The input received by the escape key is actually the same as the first characters of e.g. Arrow-Up, so without knowing what follows the escape sequence, we don’t know whether escape has been pressed, or whether it’s something else. This flush function should be called after a timeout, and processes everything that’s still in the buffer as-is, so without assuming any characters will follow.

Mappings from VT100 (ANSI) escape sequences to the corresponding prompt\_toolkit keys.

We are not using the terminfo/termcap databases to detect the ANSI escape sequences for the input. Instead, we recognize 99% of the most common sequences. This works well, because in practice, every modern terminal is mostly Xterm compatible.

Some useful docs: - Mintty: <https://github.com/mintty/mintty/blob/master/wiki/Keycodes.md>

Used by `autodoc_mock_imports`.

### 3.11.23 Output

**class** `prompt_toolkit.output.Output`

Base class defining the output interface for a *Renderer*.

Actual implementations are *Vt100\_Output* and *Win32Output*.

**ask\_for\_cpr** () → None

Asks for a cursor position report (CPR). (VT100 only.)

**bell** () → None

Sound bell.

**clear\_title** () → None

Clear title again. (or restore previous title.)

**cursor\_backward** (*amount: int*) → None

Move cursor *amount* place backward.

**cursor\_down** (*amount: int*) → None

Move cursor *amount* place down.

**cursor\_forward** (*amount: int*) → None

Move cursor *amount* place forward.

**cursor\_goto** (*row: int = 0, column: int = 0*) → None

Move cursor position.

**cursor\_up** (*amount: int*) → None

Move cursor *amount* place up.

**disable\_autowrap** () → None

Disable auto line wrapping.

**disable\_bracketed\_paste** () → None

For vt100 only.

**disable\_mouse\_support** () → None

Disable mouse.

**enable\_autowrap** () → None

Enable auto line wrapping.

**enable\_bracketed\_paste** () → None

For vt100 only.

**enable\_mouse\_support** () → None

Enable mouse.

**encoding** () → str

Return the encoding for this output, e.g. 'utf-8'. (This is used mainly to know which characters are supported by the output the data, so that the UI can provide alternatives, when required.)

**enter\_alternate\_screen** () → None

Go to the alternate screen buffer. (For full screen applications).

**erase\_down** () → None

Erases the screen from the current line down to the bottom of the screen.

**erase\_end\_of\_line** () → None

Erases from the current cursor position to the end of the current line.

**erase\_screen** () → None

Erases the screen with the background colour and moves the cursor to home.

**fileno** () → int

Return the file descriptor to which we can write for the output.

**flush** () → None

Write to output stream and flush.

**get\_default\_color\_depth** () → prompt\_toolkit.output.color\_depth.ColorDepth

Get default color depth for this output.

This value will be used if no color depth was explicitly passed to the *Application*.

---

**Note:** If the `$PROMPT_TOOLKIT_COLOR_DEPTH` environment variable has been set, then `outputs.defaults.create_output` will pass this value to the implementation as the `default_color_depth`, which is returned here. (This is not used when the output corresponds to a prompt\_toolkit SSH/Telnet session.)

---

**get\_rows\_below\_cursor\_position** () → int

For Windows only.

**get\_size** () → prompt\_toolkit.data\_structures.Size

Return the size of the output window.

**hide\_cursor** () → None

Hide cursor.

**quit\_alternate\_screen** () → None

Leave the alternate screen buffer.

**reset\_attributes** () → None

Reset color and styling attributes.

**reset\_cursor\_key\_mode** () → None

For vt100 only. Put the terminal in normal cursor mode (instead of application mode).

See: <https://vt100.net/docs/vt100-ug/chapter3.html>

**reset\_cursor\_shape** () → None

Reset cursor shape.

**responds\_to\_cpr**

*True* if the *Application* can expect to receive a CPR response after calling `ask_for_cpr` (this will come back through the corresponding *Input*).

This is used to determine the amount of available rows we have below the cursor position. In the first place, we have this so that the drop down autocompletion menus are sized according to the available space.

On Windows, we don't need this, there we have `get_rows_below_cursor_position`.

**scroll\_buffer\_to\_prompt** () → None

For Win32 only.

**set\_attributes** (*attrs*: `prompt_toolkit.styles.base.Attrs`, *color\_depth*: `prompt_toolkit.output.color_depth.ColorDepth`) → None

Set new color and styling attributes.

**set\_cursor\_shape** (*cursor\_shape*: `prompt_toolkit.cursor_shapes.CursorShape`) → None

Set cursor shape to block, beam or underline.

**set\_title** (*title: str*) → None  
Set terminal title.

**show\_cursor** () → None  
Show cursor.

**write** (*data: str*) → None  
Write text (Terminal escape sequences will be removed/escaped.)

**write\_raw** (*data: str*) → None  
Write text.

**class** `prompt_toolkit.output.DummyOutput`  
For testing. An output class that doesn't render anything.

**fileno** () → int  
There is no sensible default for `fileno()`.

**class** `prompt_toolkit.output.ColorDepth`  
Possible color depth values for the output.

**DEPTH\_1\_BIT** = 'DEPTH\_1\_BIT'  
One color only.

**DEPTH\_24\_BIT** = 'DEPTH\_24\_BIT'  
24 bit True color.

**DEPTH\_4\_BIT** = 'DEPTH\_4\_BIT'  
ANSI Colors.

**DEPTH\_8\_BIT** = 'DEPTH\_8\_BIT'  
The default.

`prompt_toolkit.output.create_output` (*stdout: TextIO | None = None, always\_prefer\_tty: bool = False*) → `Output`

Return an `Output` instance for the command line.

#### Parameters

- **stdout** – The stdout object
- **always\_prefer\_tty** – When set, look for `sys.stderr` if `sys.stdout` is not a TTY. Useful if `sys.stdout` is redirected to a file, but we still want user input and output on the terminal.

By default, this is `False`. If `sys.stdout` is not a terminal (maybe it's redirected to a file), then a `PlainTextOutput` will be returned. That way, tools like `print_formatted_text` will write plain text into that file.

Output for vt100 terminals.

A lot of thanks, regarding outputting of colors, goes to the Pygments project: (We don't rely on Pygments anymore, because many things are very custom, and everything has been highly optimized.) <http://pygments.org/>

**class** `prompt_toolkit.output.vt100.Vt100_Output` (*stdout: TextIO, get\_size: Callable[[, Size], term: str | None = None, default\_color\_depth: ColorDepth | None = None, enable\_bell: bool = True, enable\_cpr: bool = True*)

#### Parameters

- **get\_size** – A callable which returns the `Size` of the output terminal.
- **stdout** – Any object with has a `write` and `flush` method + an 'encoding' property.

- **term** – The terminal environment variable. (xterm, xterm-256color, linux, ...)
- **enable\_cpr** – When *True* (the default), send “cursor position request” escape sequences to the output in order to detect the cursor position. That way, we can properly determine how much space there is available for the UI (especially for drop down menus) to render. The *Renderer* will still try to figure out whether the current terminal does respond to CPR escapes. When *False*, never attempt to send CPR requests.

**ask\_for\_cpr** () → None

Asks for a cursor position report (CPR).

**bell** () → None

Sound bell.

**cursor\_goto** (row: int = 0, column: int = 0) → None

Move cursor position.

**encoding** () → str

Return encoding used for stdout.

**erase\_down** () → None

Erases the screen from the current line down to the bottom of the screen.

**erase\_end\_of\_line** () → None

Erases from the current cursor position to the end of the current line.

**erase\_screen** () → None

Erases the screen with the background colour and moves the cursor to home.

**fileno** () → int

Return file descriptor.

**flush** () → None

Write to output stream and flush.

**classmethod from\_pty** (stdout: TextIO, term: str | None = None, default\_color\_depth: ColorDepth | None = None, enable\_bell: bool = True) → Vt100\_Output

Create an Output class from a pseudo terminal. (This will take the dimensions by reading the pseudo terminal attributes.)

**get\_default\_color\_depth** () → prompt\_toolkit.output.color\_depth.ColorDepth

Return the default color depth for a vt100 terminal, according to the our term value.

We prefer 256 colors almost always, because this is what most terminals support these days, and is a good default.

**reset\_cursor\_key\_mode** () → None

For vt100 only. Put the terminal in cursor mode (instead of application mode).

**reset\_cursor\_shape** () → None

Reset cursor shape.

**set\_attributes** (attrs: prompt\_toolkit.styles.base.Attrs, color\_depth: prompt\_toolkit.output.color\_depth.ColorDepth) → None

Create new style and output.

**Parameters** *attrs* – *Attrs* instance.

**set\_title** (title: str) → None

Set terminal title.

**write** (data: str) → None

Write text to output. (Removes vt100 escape codes. – used for safely writing text.)

**write\_raw** (*data: str*) → None  
Write raw data to output.

Used by `autodoc_mock_imports`.

### 3.11.24 Data structures

**class** `prompt_toolkit.layout.WindowRenderInfo` (*window: Window, ui\_content: UIContent, horizontal\_scroll: int, vertical\_scroll: int, window\_width: int, window\_height: int, configured\_scroll\_offsets: ScrollOffsets, visible\_line\_to\_row\_col: dict[int, tuple[int, int]], rowcol\_to\_yx: dict[tuple[int, int], tuple[int, int]], x\_offset: int, y\_offset: int, wrap\_lines: bool*)

Render information for the last render time of this control. It stores mapping information between the input buffers (in case of a `BufferControl`) and the actual render position on the output screen.

(Could be used for implementation of the Vi ‘H’ and ‘L’ key bindings as well as implementing mouse support.)

#### Parameters

- **ui\_content** – The original `UIContent` instance that contains the whole input, without clipping. (`ui_content`)
- **horizontal\_scroll** – The horizontal scroll of the `Window` instance.
- **vertical\_scroll** – The vertical scroll of the `Window` instance.
- **window\_width** – The width of the window that displays the content, without the margins.
- **window\_height** – The height of the window that displays the content.
- **configured\_scroll\_offsets** – The scroll offsets as configured for the `Window` instance.
- **visible\_line\_to\_row\_col** – Mapping that maps the row numbers on the displayed screen (starting from zero for the first visible line) to (row, col) tuples pointing to the row and column of the `UIContent`.
- **rowcol\_to\_yx** – Mapping that maps (row, column) tuples representing coordinates of the `UIContent` to (y, x) absolute coordinates at the rendered screen.

#### **applied\_scroll\_offsets**

Return a `ScrollOffsets` instance that indicates the actual offset. This can be less than or equal to what’s configured. E.g, when the cursor is completely at the top, the top offset will be zero rather than what’s configured.

#### **bottom\_visible**

True when the bottom of the buffer is visible.

**center\_visible\_line** (*before\_scroll\_offset: bool = False, after\_scroll\_offset: bool = False*) → int  
Like `first_visible_line`, but for the center visible line.

#### **content\_height**

The full height of the user control.

#### **cursor\_position**

Return the cursor position coordinates, relative to the left/top corner of the rendered screen.

#### **displayed\_lines**

List of all the visible rows. (Line numbers of the input buffer.) The last line may not be entirely visible.

**first\_visible\_line** (*after\_scroll\_offset: bool = False*) → int

Return the line number (0 based) of the input document that corresponds with the first visible line.

**full\_height\_visible**

True when the full height is visible (There is no vertical scroll.)

**get\_height\_for\_line** (*lineno: int*) → int

Return the height of the given line. (The height that it would take, if this line became visible.)

**input\_line\_to\_visible\_line**

Return the dictionary mapping the line numbers of the input buffer to the lines of the screen. When a line spans several rows at the screen, the first row appears in the dictionary.

**last\_visible\_line** (*before\_scroll\_offset: bool = False*) → int

Like *first\_visible\_line*, but for the last visible line.

**top\_visible**

True when the top of the buffer is visible.

**vertical\_scroll\_percentage**

Vertical scroll as a percentage. (0 means: the top is visible, 100 means: the bottom is visible.)

**class** `prompt_toolkit.data_structures.Point` (*x, y*)

**x**

Alias for field number 0

**y**

Alias for field number 1

**class** `prompt_toolkit.data_structures.Size` (*rows, columns*)

**columns**

Alias for field number 1

**rows**

Alias for field number 0

### 3.11.25 Patch stdout

#### `patch_stdout`

This implements a context manager that ensures that print statements within it won't destroy the user interface. The context manager will replace `sys.stdout` by something that draws the output above the current prompt, rather than overwriting the UI.

Usage:

```
with patch_stdout(application):
    ...
    application.run()
    ...
```

Multiple applications can run in the body of the context manager, one after the other.

`prompt_toolkit.patch_stdout.patch_stdout` (*raw: bool = False*) → Generator[None, None, None]

Replace `sys.stdout` by an `_StdoutProxy` instance.

Writing to this proxy will make sure that the text appears above the prompt, and that it doesn't destroy the output from the renderer. If no application is curring, the behaviour should be identical to writing to `sys.stdout` directly.

**Warning:** If a new event loop is installed using `asyncio.set_event_loop()`, then make sure that the context manager is applied after the event loop is changed. Printing to `stdout` will be scheduled in the event loop that's active when the context manager is created.

**Parameters** `raw` – (*bool*) When True, vt100 terminal escape sequences are not removed/escaped.

**class** `prompt_toolkit.patch_stdout.StdoutProxy` (*sleep\_between\_writes: float = 0.2, raw: bool = False*)

File-like object, which prints everything written to it, output above the current application/prompt. This class is compatible with other file objects and can be used as a drop-in replacement for `sys.stdout` or can for instance be passed to `logging.StreamHandler`.

The current application, above which we print, is determined by looking what application currently runs in the `AppSession` that is active during the creation of this instance.

This class can be used as a context manager.

In order to avoid having to repaint the prompt continuously for every little write, a short delay of `sleep_between_writes` seconds will be added between writes in order to bundle many smaller writes in a short timespan.

**close** () → None

Stop `StdoutProxy` proxy.

This will terminate the write thread, make sure everything is flushed and wait for the write thread to finish.

**flush** () → None

Flush buffered output.

## CHAPTER 4

---

### Indices and tables

---

- [genindex](#)
- [modindex](#)
- [search](#)

Prompt\_toolkit was created by [Jonathan Slenders](#).



### p

- prompt\_toolkit.application, 84
- prompt\_toolkit.auto\_suggest, 122
- prompt\_toolkit.buffer, 92
- prompt\_toolkit.clipboard, 98
- prompt\_toolkit.clipboard.pyperclip, 99
- prompt\_toolkit.completion, 99
- prompt\_toolkit.document, 104
- prompt\_toolkit.enums, 108
- prompt\_toolkit.eventloop, 156
- prompt\_toolkit.eventloop.inputhook, 156
- prompt\_toolkit.eventloop.utils, 157
- prompt\_toolkit.filters, 149
- prompt\_toolkit.filters.app, 151
- prompt\_toolkit.filters.utils, 151
- prompt\_toolkit.formatted\_text, 90
- prompt\_toolkit.history, 108
- prompt\_toolkit.input, 157
- prompt\_toolkit.input.ansi\_escape\_sequences, 159
- prompt\_toolkit.input.vt100, 158
- prompt\_toolkit.input.vt100\_parser, 159
- prompt\_toolkit.input.win32, 160
- prompt\_toolkit.key\_binding, 151
- prompt\_toolkit.key\_binding.defaults, 153
- prompt\_toolkit.key\_binding.key\_processor, 154
- prompt\_toolkit.key\_binding.vi\_state, 153
- prompt\_toolkit.keys, 109
- prompt\_toolkit.layout, 126
- prompt\_toolkit.layout.processors, 140
- prompt\_toolkit.layout.screen, 144
- prompt\_toolkit.layout.utils, 144
- prompt\_toolkit.lexers, 124
- prompt\_toolkit.output, 160
- prompt\_toolkit.output.vt100, 162
- prompt\_toolkit.output.win32, 164
- prompt\_toolkit.patch\_stdout, 165
- prompt\_toolkit.renderer, 123
- prompt\_toolkit.selection, 98
- prompt\_toolkit.shortcuts, 113
- prompt\_toolkit.shortcuts.progress\_bar.formatters, 120
- prompt\_toolkit.styles, 109
- prompt\_toolkit.validation, 121
- prompt\_toolkit.widgets, 145



## A

- accept\_handler (*prompt\_toolkit.widgets.TextArea attribute*), 147
- add() (*prompt\_toolkit.key\_binding.KeyBindings method*), 151
- add\_binding() (*prompt\_toolkit.key\_binding.KeyBindings method*), 152
- AdjustBrightnessStyleTransformation (*class in prompt\_toolkit.styles*), 112
- AfterInput (*class in prompt\_toolkit.layout.processors*), 142
- Always (*class in prompt\_toolkit.filters*), 150
- ANSI (*class in prompt\_toolkit.formatted\_text*), 91
- app (*prompt\_toolkit.key\_binding.key\_processor.KeyPressEvent attribute*), 155
- append\_string() (*prompt\_toolkit.history.History method*), 108
- append\_style\_to\_content() (*prompt\_toolkit.layout.screen.Screen method*), 144
- append\_to\_arg\_count() (*prompt\_toolkit.key\_binding.key\_processor.KeyPressEvent method*), 155
- append\_to\_history() (*prompt\_toolkit.buffer.Buffer method*), 94
- AppendAutoSuggestion (*class in prompt\_toolkit.layout.processors*), 142
- Application (*class in prompt\_toolkit.application*), 84
- applied\_scroll\_offsets (*prompt\_toolkit.layout.WindowRenderInfo attribute*), 164
- apply\_completion() (*prompt\_toolkit.buffer.Buffer method*), 94
- apply\_search() (*prompt\_toolkit.buffer.Buffer method*), 94
- apply\_transformation() (*prompt\_toolkit.layout.processors.Processor method*), 140
- AppSession (*class in prompt\_toolkit.application*), 89
- arg (*prompt\_toolkit.key\_binding.key\_processor.KeyPressEvent attribute*), 155
- arg\_present (*prompt\_toolkit.key\_binding.key\_processor.KeyPressEvent attribute*), 155
- ask\_for\_cpr() (*prompt\_toolkit.output.Output method*), 160
- ask\_for\_cpr() (*prompt\_toolkit.output.vt100.Vt100\_Output method*), 163
- attach() (*prompt\_toolkit.input.Input method*), 157
- attach() (*prompt\_toolkit.input.vt100.Vt100Input method*), 158
- Attrs (*class in prompt\_toolkit.styles*), 109
- auto\_down() (*prompt\_toolkit.buffer.Buffer method*), 94
- auto\_up() (*prompt\_toolkit.buffer.Buffer method*), 94
- AutoSuggest (*class in prompt\_toolkit.auto\_suggest*), 122
- AutoSuggestFromHistory (*class in prompt\_toolkit.auto\_suggest*), 123

## B

- Bar (*class in prompt\_toolkit.shortcuts.progress\_bar.formatters*), 120
- BaseStyle (*class in prompt\_toolkit.styles*), 109
- BeforeInput (*class in prompt\_toolkit.layout.processors*), 142
- bell() (*prompt\_toolkit.output.Output method*), 160
- bell() (*prompt\_toolkit.output.vt100.Vt100\_Output method*), 163
- bgcolor (*prompt\_toolkit.styles.Attrs attribute*), 109
- bindings (*prompt\_toolkit.key\_binding.KeyBindingsBase attribute*), 151
- blink (*prompt\_toolkit.styles.Attrs attribute*), 109
- BLOCK (*prompt\_toolkit.selection.SelectionType attribute*), 98
- bold (*prompt\_toolkit.styles.Attrs attribute*), 109
- bottom\_visible (*prompt\_toolkit.layout.WindowRenderInfo attribute*), 164
- Box (*class in prompt\_toolkit.widgets*), 148
- Buffer (*class in prompt\_toolkit.buffer*), 92

buffer\_has\_focus (*prompt\_toolkit.layout.Layout attribute*), 126  
 BufferControl (*class in prompt\_toolkit.layout*), 135  
 Button (*class in prompt\_toolkit.widgets*), 147  
 button\_dialog() (*in module prompt\_toolkit.shortcuts*), 119  
**C**  
 call\_soon\_threadsafe() (*in module prompt\_toolkit.eventloop*), 156  
 call\_soon\_threadsafe() (*in module prompt\_toolkit.eventloop.utils*), 157  
 cancel\_and\_wait\_for\_background\_tasks() (*prompt\_toolkit.application.Application method*), 85  
 cancel\_completion() (*prompt\_toolkit.buffer.Buffer method*), 94  
 center\_visible\_line() (*prompt\_toolkit.layout.WindowRenderInfo method*), 164  
 Char (*class in prompt\_toolkit.layout.screen*), 145  
 char\_before\_cursor (*prompt\_toolkit.document.Document attribute*), 104  
 CHARACTERS (*prompt\_toolkit.selection.SelectionType attribute*), 98  
 Checkbox (*class in prompt\_toolkit.widgets*), 149  
 clear() (*in module prompt\_toolkit.shortcuts*), 117  
 clear() (*prompt\_toolkit.renderer.Renderer method*), 123  
 clear\_title() (*in module prompt\_toolkit.shortcuts*), 117  
 clear\_title() (*prompt\_toolkit.output.Output method*), 160  
 cli (*prompt\_toolkit.key\_binding.key\_processor.KeyPressEvent attribute*), 155  
 Clipboard (*class in prompt\_toolkit.clipboard*), 98  
 ClipboardData (*class in prompt\_toolkit.clipboard*), 99  
 close() (*prompt\_toolkit.eventloop.inputhook.InputHookSelector method*), 157  
 close() (*prompt\_toolkit.input.Input method*), 157  
 close() (*prompt\_toolkit.patch\_stdout.StdoutProxy method*), 166  
 closed (*prompt\_toolkit.input.Input attribute*), 158  
 color (*prompt\_toolkit.styles.Attrs attribute*), 109  
 color\_depth (*prompt\_toolkit.application.Application attribute*), 86  
 ColorColumn (*class in prompt\_toolkit.layout*), 135  
 ColorDepth (*class in prompt\_toolkit.output*), 162  
 columns (*prompt\_toolkit.data\_structures.Size attribute*), 165  
 complete\_index (*prompt\_toolkit.buffer.CompletionState attribute*), 97  
 complete\_next() (*prompt\_toolkit.buffer.Buffer method*), 94  
 complete\_previous() (*prompt\_toolkit.buffer.Buffer method*), 94  
 CompleteEvent (*class in prompt\_toolkit.completion*), 101  
 Completer (*class in prompt\_toolkit.completion*), 100  
 CompleteStyle (*class in prompt\_toolkit.shortcuts*), 117  
 Completion (*class in prompt\_toolkit.completion*), 99  
 completion\_requested (*prompt\_toolkit.completion.CompleteEvent attribute*), 101  
 completions (*prompt\_toolkit.buffer.CompletionState attribute*), 97  
 CompletionsMenu (*class in prompt\_toolkit.layout*), 140  
 CompletionState (*class in prompt\_toolkit.buffer*), 97  
 Condition (*class in prompt\_toolkit.filters*), 150  
 ConditionalAutoSuggest (*class in prompt\_toolkit.auto\_suggest*), 123  
 ConditionalCompleter (*class in prompt\_toolkit.completion*), 101  
 ConditionalContainer (*class in prompt\_toolkit.layout*), 133  
 ConditionalKeyBindings (*class in prompt\_toolkit.key\_binding*), 153  
 ConditionalMargin (*class in prompt\_toolkit.layout*), 139  
 ConditionalProcessor (*class in prompt\_toolkit.layout.processors*), 143  
 ConditionalStyleTransformation (*class in prompt\_toolkit.styles*), 112  
 ConditionalValidator (*class in prompt\_toolkit.validation*), 121  
 confirm() (*in module prompt\_toolkit.shortcuts*), 117  
 Container (*class in prompt\_toolkit.layout*), 128  
 content\_height (*prompt\_toolkit.layout.WindowRenderInfo attribute*), 164  
 cooked\_mode (*class in prompt\_toolkit.input.vt100*), 159  
 cooked\_mode() (*prompt\_toolkit.input.Input method*), 158  
 copy\_selection() (*prompt\_toolkit.buffer.Buffer method*), 94  
 cpr\_not\_supported\_callback() (*prompt\_toolkit.application.Application method*), 86  
 create\_app\_session() (*in module prompt\_toolkit.application*), 89  
 create\_background\_task() (*prompt\_toolkit.application.Application method*), 86

- create\_confirm\_session() (in module *prompt\_toolkit.shortcuts*), 117  
 create\_content() (*prompt\_toolkit.layout.BufferControl* method), 135  
 create\_content() (*prompt\_toolkit.layout.UIControl* method), 137  
 create\_default\_formatters() (in module *prompt\_toolkit.shortcuts.progress\_bar.formatters*), 121  
 create\_input() (in module *prompt\_toolkit.input*), 158  
 create\_margin() (*prompt\_toolkit.layout.Margin* method), 139  
 create\_output() (in module *prompt\_toolkit.output*), 162  
 create\_pipe\_input() (in module *prompt\_toolkit.input*), 158  
 current\_buffer (*prompt\_toolkit.application.Application* attribute), 86  
 current\_buffer (*prompt\_toolkit.key\_binding.key\_processor.KeyPressEvent* attribute), 155  
 current\_buffer (*prompt\_toolkit.layout.Layout* attribute), 127  
 current\_char (*prompt\_toolkit.document.Document* attribute), 104  
 current\_completion (*prompt\_toolkit.buffer.CompletionState* attribute), 97  
 current\_control (*prompt\_toolkit.layout.Layout* attribute), 127  
 current\_line (*prompt\_toolkit.document.Document* attribute), 104  
 current\_line\_after\_cursor (*prompt\_toolkit.document.Document* attribute), 104  
 current\_line\_before\_cursor (*prompt\_toolkit.document.Document* attribute), 104  
 current\_search\_state (*prompt\_toolkit.application.Application* attribute), 86  
 current\_window (*prompt\_toolkit.layout.Layout* attribute), 127  
 cursor\_backward() (*prompt\_toolkit.output.Output* method), 160  
 cursor\_down() (*prompt\_toolkit.buffer.Buffer* method), 94  
 cursor\_down() (*prompt\_toolkit.output.Output* method), 160  
 cursor\_forward() (*prompt\_toolkit.output.Output* method), 160  
 cursor\_goto() (*prompt\_toolkit.output.Output* method), 160  
 cursor\_goto() (*prompt\_toolkit.output.vt100.Vt100\_Output* method), 163  
 cursor\_position (*prompt\_toolkit.document.Document* attribute), 104  
 cursor\_position (*prompt\_toolkit.layout.WindowRenderInfo* attribute), 164  
 cursor\_position\_col (*prompt\_toolkit.document.Document* attribute), 104  
 cursor\_position\_row (*prompt\_toolkit.document.Document* attribute), 104  
 cursor\_positions (*prompt\_toolkit.layout.screen.Screen* attribute), 144  
 cursor\_up() (*prompt\_toolkit.buffer.Buffer* method), 94  
 cursor\_up() (*prompt\_toolkit.output.Output* method), 160  
 out\_selection() (*prompt\_toolkit.buffer.Buffer* method), 94  
 KeyPressEvent() (*prompt\_toolkit.document.Document* method), 104
- ## D
- DeduplicateCompleter (class in *prompt\_toolkit.completion*), 103  
 DEFAULT\_BUFFER (in module *prompt\_toolkit.enums*), 108  
 delete() (*prompt\_toolkit.buffer.Buffer* method), 94  
 delete\_before\_cursor() (*prompt\_toolkit.buffer.Buffer* method), 94  
 DEPTH\_1\_BIT (*prompt\_toolkit.output.ColorDepth* attribute), 162  
 DEPTH\_24\_BIT (*prompt\_toolkit.output.ColorDepth* attribute), 162  
 DEPTH\_4\_BIT (*prompt\_toolkit.output.ColorDepth* attribute), 162  
 DEPTH\_8\_BIT (*prompt\_toolkit.output.ColorDepth* attribute), 162  
 detach() (*prompt\_toolkit.input.Input* method), 158  
 detach() (*prompt\_toolkit.input.vt100.Vt100Input* method), 158  
 Dimension (class in *prompt\_toolkit.layout*), 138  
 disable\_autowrap() (*prompt\_toolkit.output.Output* method), 160  
 disable\_bracketed\_paste() (*prompt\_toolkit.output.Output* method), 160  
 disable\_mouse\_support() (*prompt\_toolkit.output.Output* method), 160  
 display\_meta (*prompt\_toolkit.completion.Completion* attribute), 100  
 display\_meta\_text (*prompt\_toolkit.completion.Completion* attribute), 100

- display\_text (*prompt\_toolkit.completion.Completion attribute*), 100
- displayed\_lines (*prompt\_toolkit.layout.WindowRenderer attribute*), 164
- DisplayMultipleCursors (class in *prompt\_toolkit.layout.processors*), 142
- Document (class in *prompt\_toolkit.document*), 104
- document (*prompt\_toolkit.buffer.Buffer attribute*), 95
- document (*prompt\_toolkit.widgets.TextArea attribute*), 147
- document\_for\_search() (*prompt\_toolkit.buffer.Buffer method*), 95
- draw\_all\_floats() (*prompt\_toolkit.layout.screen.Screen method*), 144
- draw\_with\_z\_index() (*prompt\_toolkit.layout.screen.Screen method*), 144
- DummyApplication (class in *prompt\_toolkit.application*), 89
- DummyAutoSuggest (class in *prompt\_toolkit.auto\_suggest*), 123
- DummyClipboard (class in *prompt\_toolkit.clipboard*), 99
- DummyCompleter (class in *prompt\_toolkit.completion*), 100
- DummyControl (class in *prompt\_toolkit.layout*), 136
- DummyHistory (class in *prompt\_toolkit.history*), 109
- DummyInput (class in *prompt\_toolkit.input*), 158
- DummyOutput (class in *prompt\_toolkit.output*), 162
- DummyProcessor (class in *prompt\_toolkit.layout.processors*), 141
- DummyStyle (class in *prompt\_toolkit.styles*), 110
- DummyStyleTransformation (class in *prompt\_toolkit.styles*), 112
- DummyValidator (class in *prompt\_toolkit.validation*), 122
- DynamicAutoSuggest (class in *prompt\_toolkit.auto\_suggest*), 123
- DynamicClipboard (class in *prompt\_toolkit.clipboard*), 99
- DynamicCompleter (class in *prompt\_toolkit.completion*), 100
- DynamicContainer (class in *prompt\_toolkit.layout*), 133
- DynamicKeyBindings (class in *prompt\_toolkit.key\_binding*), 153
- DynamicLexer (class in *prompt\_toolkit.lexers*), 124
- DynamicProcessor (class in *prompt\_toolkit.layout.processors*), 144
- DynamicStyle (class in *prompt\_toolkit.styles*), 110
- DynamicStyleTransformation (class in *prompt\_toolkit.styles*), 112
- DynamicValidator (class in *prompt\_toolkit.validation*), 122
- EditingMode (class in *prompt\_toolkit.enums*), 108
- EditReadOnlyBuffer, 92
- empty\_line\_count\_at\_the\_end() (*prompt\_toolkit.document.Document method*), 104
- empty\_queue() (*prompt\_toolkit.key\_binding.key\_processor.KeyProcessor method*), 154
- enable\_autowrap() (*prompt\_toolkit.output.Output method*), 160
- enable\_bracketed\_paste() (*prompt\_toolkit.output.Output method*), 160
- enable\_mouse\_support() (*prompt\_toolkit.output.Output method*), 160
- encoding() (*prompt\_toolkit.output.Output method*), 160
- encoding() (*prompt\_toolkit.output.vt100.Vt100\_Output method*), 163
- end\_of\_paragraph() (*prompt\_toolkit.document.Document method*), 104
- enter\_alternate\_screen() (*prompt\_toolkit.output.Output method*), 160
- erase() (*prompt\_toolkit.renderer.Renderer method*), 123
- erase\_down() (*prompt\_toolkit.output.Output method*), 160
- erase\_down() (*prompt\_toolkit.output.vt100.Vt100\_Output method*), 163
- erase\_end\_of\_line() (*prompt\_toolkit.output.Output method*), 160
- erase\_end\_of\_line() (*prompt\_toolkit.output.vt100.Vt100\_Output method*), 163
- erase\_screen() (*prompt\_toolkit.output.Output method*), 161
- erase\_screen() (*prompt\_toolkit.output.vt100.Vt100\_Output method*), 163
- exact() (*prompt\_toolkit.layout.Dimension class method*), 138
- ExecutableCompleter (class in *prompt\_toolkit.completion*), 102
- exit() (*prompt\_toolkit.application.Application method*), 86
- explode\_text\_fragments() (in module *prompt\_toolkit.layout.utils*), 144

## E

## F

- [feed\\_and\\_flush\(\)](#) (*prompt\_toolkit.input.vt100\_parser.Vt100Parser* method), 159  
[feed\\_multiple\(\)](#) (*prompt\_toolkit.key\_binding.key\_processor.KeyProcessor* method), 154  
[FileHistory](#) (*class in prompt\_toolkit.history*), 109  
[fileno\(\)](#) (*prompt\_toolkit.input.Input* method), 158  
[fileno\(\)](#) (*prompt\_toolkit.output.DummyOutput* method), 162  
[fileno\(\)](#) (*prompt\_toolkit.output.Output* method), 161  
[fileno\(\)](#) (*prompt\_toolkit.output.vt100.Vt100\_Output* method), 163  
[fill\\_area\(\)](#) (*prompt\_toolkit.layout.screen.Screen* method), 145  
[Filter](#) (*class in prompt\_toolkit.filters*), 150  
[find\(\)](#) (*prompt\_toolkit.document.Document* method), 104  
[find\\_all\(\)](#) (*prompt\_toolkit.document.Document* method), 104  
[find\\_all\\_windows\(\)](#) (*prompt\_toolkit.layout.Layout* method), 127  
[find\\_backwards\(\)](#) (*prompt\_toolkit.document.Document* method), 104  
[find\\_boundaries\\_of\\_current\\_word\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_enclosing\\_bracket\\_left\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_enclosing\\_bracket\\_right\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_matching\\_bracket\\_position\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_next\\_matching\\_line\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_next\\_word\\_beginning\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_next\\_word\\_ending\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_previous\\_matching\\_line\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_previous\\_word\\_beginning\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_previous\\_word\\_ending\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[find\\_start\\_of\\_previous\\_word\(\)](#) (*prompt\_toolkit.document.Document* method), 105  
[first\\_visible\\_line\(\)](#) (*prompt\_toolkit.layout.WindowRenderInfo* method), 164  
[Float](#) (*class in prompt\_toolkit.layout*), 131  
[FloatContainer](#) (*class in prompt\_toolkit.layout*), 130  
[flush\(\)](#) (*prompt\_toolkit.input.Input* method), 158  
[flush\(\)](#) (*prompt\_toolkit.input.vt100\_parser.Vt100Parser* method), 159  
[flush\(\)](#) (*prompt\_toolkit.output.Output* method), 161  
[flush\(\)](#) (*prompt\_toolkit.output.vt100.Vt100\_Output* method), 163  
[flush\(\)](#) (*prompt\_toolkit.patch\_stdout.StdoutProxy* method), 166  
[flush\\_keys\(\)](#) (*prompt\_toolkit.input.Input* method), 158  
[flush\\_keys\(\)](#) (*prompt\_toolkit.input.vt100.Vt100Input* method), 159  
[focus\(\)](#) (*prompt\_toolkit.layout.Layout* method), 127  
[focus\\_last\(\)](#) (*prompt\_toolkit.layout.Layout* method), 127  
[focus\\_next\(\)](#) (*prompt\_toolkit.layout.Layout* method), 127  
[focus\\_previous\(\)](#) (*prompt\_toolkit.layout.Layout* method), 127  
[format\(\)](#) (*prompt\_toolkit.formatted\_text.ANSI* method), 91  
[format\(\)](#) (*prompt\_toolkit.formatted\_text.HTML* method), 91  
[FormattedText](#) (*class in prompt\_toolkit.formatted\_text*), 91  
[FormattedTextControl](#) (*class in prompt\_toolkit.layout*), 136  
[Formatter](#) (*class in prompt\_toolkit.shortcuts.progress\_bar.formatters*), 120  
[fragment\\_list\\_len\(\)](#) (*in module prompt\_toolkit.formatted\_text*), 91  
[fragment\\_list\\_to\\_text\(\)](#) (*in module prompt\_toolkit.formatted\_text*), 92  
[fragment\\_list\\_width\(\)](#) (*in module prompt\_toolkit.formatted\_text*), 92  
[Frame](#) (*class in prompt\_toolkit.widgets*), 148  
[from\\_callable\(\)](#) (*prompt\_toolkit.validation.Validator* class method), 121  
[from\\_dict\(\)](#) (*prompt\_toolkit.styles.Style* class method), 110  
[from\\_filename\(\)](#) (*prompt\_toolkit.lexers.PygmentsLexer* class method), 125  
[from\\_nested\\_dict\(\)](#) (*prompt\_toolkit.completion.NestedCompleter* class method), 103  
[from\\_pty\(\)](#) (*prompt\_toolkit.output.vt100.Vt100\_Output*

*class method*), 163  
 from\_pygments\_lexer\_cls() (*prompt\_toolkit.lexers.RegexSync class method*), 125  
 full\_height\_visible (*prompt\_toolkit.layout.WindowRenderInfo attribute*), 165  
 FuzzyCompleter (*class in prompt\_toolkit.completion*), 102  
 FuzzyWordCompleter (*class in prompt\_toolkit.completion*), 102

## G

get\_app() (*in module prompt\_toolkit.application*), 88  
 get\_app\_or\_none() (*in module prompt\_toolkit.application*), 89  
 get\_attrs\_for\_style\_str() (*prompt\_toolkit.styles.BaseStyle method*), 109  
 get\_attrs\_for\_style\_str() (*prompt\_toolkit.styles.Style method*), 110  
 get\_bindings\_for\_keys() (*prompt\_toolkit.key\_binding.KeyBindings method*), 152  
 get\_bindings\_for\_keys() (*prompt\_toolkit.key\_binding.KeyBindingsBase method*), 151  
 get\_bindings\_starting\_with\_keys() (*prompt\_toolkit.key\_binding.KeyBindings method*), 152  
 get\_bindings\_starting\_with\_keys() (*prompt\_toolkit.key\_binding.KeyBindingsBase method*), 151  
 get\_buffer\_by\_name() (*prompt\_toolkit.layout.Layout method*), 127  
 get\_children() (*prompt\_toolkit.layout.Container method*), 128  
 get\_column\_cursor\_position() (*prompt\_toolkit.document.Document method*), 105  
 get\_common\_complete\_suffix() (*in module prompt\_toolkit.completion*), 101  
 get\_completions() (*prompt\_toolkit.completion.Completer method*), 100  
 get\_completions\_async() (*prompt\_toolkit.completion.Completer method*), 100  
 get\_completions\_async() (*prompt\_toolkit.completion.ThreadedCompleter method*), 100  
 get\_cursor\_down\_position() (*prompt\_toolkit.document.Document method*), 106  
 get\_cursor\_left\_position() (*prompt\_toolkit.document.Document method*), 106  
 get\_cursor\_position() (*prompt\_toolkit.layout.screen.Screen method*), 145  
 get\_cursor\_right\_position() (*prompt\_toolkit.document.Document method*), 106  
 get\_cursor\_up\_position() (*prompt\_toolkit.document.Document method*), 106  
 get\_data() (*prompt\_toolkit.clipboard.Clipboard method*), 98  
 get\_default\_color\_depth() (*prompt\_toolkit.output.Output method*), 161  
 get\_default\_color\_depth() (*prompt\_toolkit.output.vt100.Vt100\_Output method*), 163  
 get\_end\_of\_document\_position() (*prompt\_toolkit.document.Document method*), 106  
 get\_end\_of\_line\_position() (*prompt\_toolkit.document.Document method*), 106  
 get\_focusable\_windows() (*prompt\_toolkit.layout.Layout method*), 127  
 get\_height\_for\_line() (*prompt\_toolkit.layout.UIContent method*), 138  
 get\_height\_for\_line() (*prompt\_toolkit.layout.WindowRenderInfo method*), 165  
 get\_invalidate\_events() (*prompt\_toolkit.layout.BufferControl method*), 135  
 get\_invalidate\_events() (*prompt\_toolkit.layout.UIControl method*), 137  
 get\_key\_bindings() (*prompt\_toolkit.layout.BufferControl method*), 135  
 get\_key\_bindings() (*prompt\_toolkit.layout.Container method*), 128  
 get\_key\_bindings() (*prompt\_toolkit.layout.UIControl method*), 137  
 get\_menu\_position() (*prompt\_toolkit.layout.screen.Screen method*), 145  
 get\_parent() (*prompt\_toolkit.layout.Layout method*), 127  
 get\_rows\_below\_cursor\_position()

(*prompt\_toolkit.output.Output* method), 161

`get_search_position()`  
(*prompt\_toolkit.buffer.Buffer* method), 95

`get_size()` (*prompt\_toolkit.output.Output* method), 161

`get_start_of_document_position()`  
(*prompt\_toolkit.document.Document* method), 106

`get_start_of_line_position()`  
(*prompt\_toolkit.document.Document* method), 106

`get_strings()` (*prompt\_toolkit.history.History* method), 108

`get_suggestion()` (*prompt\_toolkit.auto\_suggest.AutoSuggest* method), 122

`get_suggestion_async()`  
(*prompt\_toolkit.auto\_suggest.AutoSuggest* method), 122

`get_suggestion_async()`  
(*prompt\_toolkit.auto\_suggest.ThreadedAutoSuggest* method), 123

`get_sync_start_position()`  
(*prompt\_toolkit.lexers.RegexSync* method), 125

`get_sync_start_position()`  
(*prompt\_toolkit.lexers.SyntaxSync* method), 125

`get_traceback_from_context()` (in module *prompt\_toolkit.eventloop*), 156

`get_traceback_from_context()` (in module *prompt\_toolkit.eventloop.utils*), 157

`get_used_style_strings()`  
(*prompt\_toolkit.application.Application* method), 86

`get_visible_focusable_windows()`  
(*prompt\_toolkit.layout.Layout* method), 127

`get_width()` (*prompt\_toolkit.layout.Margin* method), 139

`get_width()` (*prompt\_toolkit.layout.PromptMargin* method), 140

`get_word_before_cursor()`  
(*prompt\_toolkit.document.Document* method), 106

`get_word_under_cursor()`  
(*prompt\_toolkit.document.Document* method), 106

`go_to_completion()` (*prompt\_toolkit.buffer.Buffer* method), 95

`go_to_history()` (*prompt\_toolkit.buffer.Buffer* method), 95

`go_to_index()` (*prompt\_toolkit.buffer.CompletionState* method), 97

## H

`has_focus()` (in module *prompt\_toolkit.filters*), 150

`has_focus()` (in module *prompt\_toolkit.filters.app*), 151

`has_focus()` (*prompt\_toolkit.layout.Layout* method), 127

`has_match_at_current_position()`  
(*prompt\_toolkit.document.Document* method), 106

`HasFocus()` (in module *prompt\_toolkit.filters*), 150

`height_is_known` (*prompt\_toolkit.renderer.Renderer* attribute), 123

`hidden` (*prompt\_toolkit.styles.Attrs* attribute), 109

`hide_cursor()` (*prompt\_toolkit.output.Output* method), 161

`HighlightIncrementalSearchProcessor` (class in *prompt\_toolkit.layout.processors*), 141

`HighlightMatchingBracketProcessor` (class in *prompt\_toolkit.layout.processors*), 142

`HighlightSearchProcessor` (class in *prompt\_toolkit.layout.processors*), 141

`HighlightSelectionProcessor` (class in *prompt\_toolkit.layout.processors*), 141

`History` (class in *prompt\_toolkit.history*), 108

`history_backward()` (*prompt\_toolkit.buffer.Buffer* method), 95

`history_forward()` (*prompt\_toolkit.buffer.Buffer* method), 95

`HorizontalAlign` (class in *prompt\_toolkit.layout*), 135

`HorizontalLine` (class in *prompt\_toolkit.widgets*), 148

`HSplit` (class in *prompt\_toolkit.layout*), 128

`HTML` (class in *prompt\_toolkit.formatted\_text*), 91

## I

`in_editing_mode()` (in module *prompt\_toolkit.filters*), 150

`in_editing_mode()` (in module *prompt\_toolkit.filters.app*), 151

`in_terminal()` (in module *prompt\_toolkit.application*), 89

`indent()` (in module *prompt\_toolkit.buffer*), 98

`InEditingMode()` (in module *prompt\_toolkit.filters*), 150

`InMemoryClipboard` (class in *prompt\_toolkit.clipboard*), 99

`InMemoryHistory` (class in *prompt\_toolkit.history*), 109

`Input` (class in *prompt\_toolkit.input*), 157

`input_dialog()` (in module *prompt\_toolkit.shortcuts*), 119

InputHookContext (class in prompt\_toolkit.eventloop.inputhook), 157  
 InputHookSelector (class in prompt\_toolkit.eventloop.inputhook), 156  
 InputMode (class in prompt\_toolkit.key\_binding.vi\_state), 153  
 insert\_after() (prompt\_toolkit.document.Document method), 106  
 insert\_before() (prompt\_toolkit.document.Document method), 106  
 insert\_line\_above() (prompt\_toolkit.buffer.Buffer method), 95  
 insert\_line\_below() (prompt\_toolkit.buffer.Buffer method), 95  
 insert\_text() (prompt\_toolkit.buffer.Buffer method), 95  
 invalidate() (prompt\_toolkit.application.Application method), 87  
 invalidated (prompt\_toolkit.application.Application attribute), 87  
 invalidation\_hash() (prompt\_toolkit.lexers.Lexer method), 124  
 invalidation\_hash() (prompt\_toolkit.styles.BaseStyle method), 110  
 invalidation\_hash() (prompt\_toolkit.styles.StyleTransformation method), 111  
 InvalidLayoutError (class in prompt\_toolkit.layout), 128  
 is\_container (class in prompt\_toolkit.layout), 135  
 is\_cursor\_at\_the\_end (prompt\_toolkit.document.Document attribute), 106  
 is\_cursor\_at\_the\_end\_of\_line (prompt\_toolkit.document.Document attribute), 106  
 is\_focusable() (prompt\_toolkit.layout.UIControl method), 137  
 is\_formatted\_text() (in module prompt\_toolkit.formatted\_text), 90  
 is\_modal() (prompt\_toolkit.layout.Container method), 128  
 is\_repeat (prompt\_toolkit.key\_binding.key\_processor.KeyPressEvent attribute), 155  
 is\_returnable (prompt\_toolkit.buffer.Buffer attribute), 95  
 is\_running (prompt\_toolkit.application.Application attribute), 87  
 is\_searching (prompt\_toolkit.layout.Layout attribute), 127  
 is\_true() (in module prompt\_toolkit.filters), 150  
 is\_true() (in module prompt\_toolkit.filters.utils), 151  
 is\_zero() (prompt\_toolkit.layout.Dimension method), 138  
 italic (prompt\_toolkit.styles.Attrs attribute), 109  
 IterationsPerSecond (class in prompt\_toolkit.shortcuts.progress\_bar.formatters), 120  
**J**  
 join\_next\_line() (prompt\_toolkit.buffer.Buffer method), 95  
 join\_selected\_lines() (prompt\_toolkit.buffer.Buffer method), 95  
**K**  
 key\_processor (prompt\_toolkit.application.Application attribute), 87  
 KeyBindings (class in prompt\_toolkit.key\_binding), 151  
 KeyBindingsBase (class in prompt\_toolkit.key\_binding), 151  
 KeyPress (class in prompt\_toolkit.key\_binding.key\_processor), 155  
 KeyPressEvent (class in prompt\_toolkit.key\_binding.key\_processor), 155  
 KeyProcessor (class in prompt\_toolkit.key\_binding.key\_processor), 154  
 Keys (class in prompt\_toolkit.keys), 109  
**L**  
 Label (class in prompt\_toolkit.shortcuts.progress\_bar.formatters), 120  
 Label (class in prompt\_toolkit.widgets), 147  
 last\_character\_find (prompt\_toolkit.key\_binding.vi\_state.ViState attribute), 154  
 last\_non\_blank\_of\_current\_line\_position() (prompt\_toolkit.document.Document method), 106  
 last\_rendered\_screen (prompt\_toolkit.renderer.Renderer attribute), 123  
 last\_visible\_line() (prompt\_toolkit.layout.WindowRenderInfo method), 165  
 Layout (class in prompt\_toolkit.layout), 126  
 leading\_whitespace\_in\_current\_line (prompt\_toolkit.document.Document attribute), 107

- lex\_document() (*prompt\_toolkit.lexers.Lexer* method), 124
- lex\_document() (*prompt\_toolkit.lexers.PygmentsLexer* method), 125
- Lexer (*class in prompt\_toolkit.lexers*), 124
- line\_count (*prompt\_toolkit.document.Document* attribute), 107
- lines (*prompt\_toolkit.document.Document* attribute), 107
- LINES (*prompt\_toolkit.selection.SelectionType* attribute), 98
- lines\_from\_current (*prompt\_toolkit.document.Document* attribute), 107
- load() (*prompt\_toolkit.history.History* method), 108
- load() (*prompt\_toolkit.history.ThreadedHistory* method), 108
- load\_history\_if\_not\_yet\_loaded() (*prompt\_toolkit.buffer.Buffer* method), 95
- load\_history\_strings() (*prompt\_toolkit.history.History* method), 108
- load\_key\_bindings() (*in module prompt\_toolkit.key\_binding.defaults*), 153
- ## M
- Margin (*class in prompt\_toolkit.layout*), 139
- menu\_positions (*prompt\_toolkit.layout.screen.Screen* attribute), 145
- MenuContainer (*class in prompt\_toolkit.widgets*), 149
- merge\_completers() (*in module prompt\_toolkit.completion*), 101
- merge\_formatted\_text() (*in module prompt\_toolkit.formatted\_text*), 91
- merge\_key\_bindings() (*in module prompt\_toolkit.key\_binding*), 153
- merge\_processors() (*in module prompt\_toolkit.layout.processors*), 144
- merge\_style\_transformations() (*in module prompt\_toolkit.styles*), 112
- merge\_styles() (*in module prompt\_toolkit.styles*), 111
- message\_dialog() (*in module prompt\_toolkit.shortcuts*), 119
- mouse\_handler() (*prompt\_toolkit.layout.BufferControl* method), 136
- mouse\_handler() (*prompt\_toolkit.layout.FormattedTextControl* method), 137
- mouse\_handler() (*prompt\_toolkit.layout.UIControl* method), 137
- move\_cursor\_down() (*prompt\_toolkit.layout.UIControl* method), 137
- move\_cursor\_up() (*prompt\_toolkit.layout.UIControl* method), 137
- MultiColumnCompletionsMenu (*class in prompt\_toolkit.layout*), 140
- ## N
- named\_registers (*prompt\_toolkit.key\_binding.vi\_state.ViState* attribute), 154
- NestedCompleter (*class in prompt\_toolkit.completion*), 102
- Never (*class in prompt\_toolkit.filters*), 150
- new\_completion\_from\_position() (*prompt\_toolkit.completion.Completion* method), 100
- new\_eventloop\_with\_inpuhook() (*in module prompt\_toolkit.eventloop.inpuhook*), 156
- new\_text\_and\_position() (*prompt\_toolkit.buffer.CompletionState* method), 98
- newline() (*prompt\_toolkit.buffer.Buffer* method), 96
- NumberedMargin (*class in prompt\_toolkit.layout*), 139
- ## O
- on\_first\_line (*prompt\_toolkit.document.Document* attribute), 107
- on\_last\_line (*prompt\_toolkit.document.Document* attribute), 107
- open\_in\_editor() (*prompt\_toolkit.buffer.Buffer* method), 96
- original\_document (*prompt\_toolkit.buffer.CompletionState* attribute), 98
- Output (*class in prompt\_toolkit.output*), 160
- ## P
- PasswordProcessor (*class in prompt\_toolkit.layout.processors*), 141
- paste\_clipboard\_data() (*prompt\_toolkit.buffer.Buffer* method), 96
- paste\_clipboard\_data() (*prompt\_toolkit.document.Document* method), 107
- PasteMode (*class in prompt\_toolkit.selection*), 98
- patch\_stdout() (*in module prompt\_toolkit.patch\_stdout*), 165
- PatchCompleter (*class in prompt\_toolkit.completion*), 101
- Percentage (*class in prompt\_toolkit.shortcuts.progress\_bar.formatters*), 120
- Point (*class in prompt\_toolkit.data\_structures*), 165

- preferred\_height () (prompt\_toolkit.layout.Container method), 128
- preferred\_height () (prompt\_toolkit.layout.FloatContainer method), 130
- preferred\_height () (prompt\_toolkit.layout.FormattedTextControl method), 137
- preferred\_height () (prompt\_toolkit.layout.Window method), 133
- preferred\_width () (prompt\_toolkit.layout.BufferControl method), 136
- preferred\_width () (prompt\_toolkit.layout.Container method), 128
- preferred\_width () (prompt\_toolkit.layout.FormattedTextControl method), 137
- preferred\_width () (prompt\_toolkit.layout.Window method), 133
- previous\_control (prompt\_toolkit.layout.Layout attribute), 127
- print\_formatted\_text () (in module prompt\_toolkit.renderer), 124
- print\_formatted\_text () (in module prompt\_toolkit.shortcuts), 117
- print\_text () (prompt\_toolkit.application.Application method), 87
- Priority (class in prompt\_toolkit.styles), 110
- process\_keys () (prompt\_toolkit.key\_binding.key\_processor.KeyProcessor method), 154
- Processor (class in prompt\_toolkit.layout.processors), 140
- Progress (class in prompt\_toolkit.shortcuts.progress\_bar.formatters), 120
- progress\_dialog () (in module prompt\_toolkit.shortcuts), 119
- ProgressBar (class in prompt\_toolkit.shortcuts), 118
- prompt () (in module prompt\_toolkit.shortcuts), 113
- prompt () (prompt\_toolkit.shortcuts.PromptSession method), 116
- prompt\_toolkit.application (module), 84
- prompt\_toolkit.auto\_suggest (module), 122
- prompt\_toolkit.buffer (module), 92
- prompt\_toolkit.clipboard (module), 98
- prompt\_toolkit.clipboard.pyperclip (module), 99
- prompt\_toolkit.completion (module), 99
- prompt\_toolkit.document (module), 104
- prompt\_toolkit.enums (module), 108
- prompt\_toolkit.eventloop (module), 156
- prompt\_toolkit.eventloop.inputhook (module), 156
- prompt\_toolkit.eventloop.utils (module), 157
- prompt\_toolkit.filters (module), 149
- prompt\_toolkit.filters.app (module), 151
- prompt\_toolkit.filters.utils (module), 151
- prompt\_toolkit.formatted\_text (module), 90
- prompt\_toolkit.history (module), 108
- prompt\_toolkit.input (module), 157
- prompt\_toolkit.input.ansi\_escape\_sequences (module), 159
- prompt\_toolkit.input.vt100 (module), 158
- prompt\_toolkit.input.vt100\_parser (module), 159
- prompt\_toolkit.input.win32 (module), 160
- prompt\_toolkit.key\_binding (module), 151
- prompt\_toolkit.key\_binding.defaults (module), 153
- prompt\_toolkit.key\_binding.key\_processor (module), 154
- prompt\_toolkit.key\_binding.vi\_state (module), 153
- prompt\_toolkit.keys (module), 109
- prompt\_toolkit.layout (module), 126
- prompt\_toolkit.layout.processors (module), 140
- prompt\_toolkit.layout.screen (module), 144
- prompt\_toolkit.layout.utils (module), 144
- prompt\_toolkit.lexers (module), 124
- prompt\_toolkit.output (module), 160
- prompt\_toolkit.output.vt100 (module), 162
- prompt\_toolkit.output.win32 (module), 164
- prompt\_toolkit.patch\_stdout (module), 165
- prompt\_toolkit.renderer (module), 123
- prompt\_toolkit.selection (module), 98
- prompt\_toolkit.shortcuts (module), 113
- prompt\_toolkit.shortcuts.progress\_bar.formatters (module), 120
- prompt\_toolkit.styles (module), 109
- prompt\_toolkit.validation (module), 121
- prompt\_toolkit.widgets (module), 145
- PromptMargin (class in prompt\_toolkit.layout), 139
- PromptSession (class in prompt\_toolkit.shortcuts), 114
- pygments\_token\_to\_classname () (in module prompt\_toolkit.styles), 111
- PygmentsLexer (class in prompt\_toolkit.lexers), 124
- PygmentsTokens (class in prompt\_toolkit.formatted\_text), 91
- PyperclipClipboard (class in prompt\_toolkit.clipboard.pyperclip), 99

## Q

quit\_alternate\_screen() (prompt\_toolkit.output.Output method), 161

quoted\_insert (prompt\_toolkit.application.Application attribute), 87

## R

RadioList (class in prompt\_toolkit.widgets), 148

radiolist\_dialog() (in module prompt\_toolkit.shortcuts), 119

Rainbow (class in prompt\_toolkit.shortcuts.progress\_bar.formatters), 120

raw\_mode (class in prompt\_toolkit.input.vt100), 159

raw\_mode() (prompt\_toolkit.input.Input method), 158

read\_keys() (prompt\_toolkit.input.Input method), 158

read\_keys() (prompt\_toolkit.input.vt100.Vt100Input method), 159

RegexSync (class in prompt\_toolkit.lexers), 125

remove() (prompt\_toolkit.key\_binding.KeyBindings method), 152

remove\_binding() (prompt\_toolkit.key\_binding.KeyBindings method), 153

render() (prompt\_toolkit.renderer.Renderer method), 123

render\_counter (prompt\_toolkit.application.Application attribute), 87

Renderer (class in prompt\_toolkit.renderer), 123

report\_absolute\_cursor\_row() (prompt\_toolkit.renderer.Renderer method), 123

request\_absolute\_cursor\_position() (prompt\_toolkit.renderer.Renderer method), 124

reset() (prompt\_toolkit.application.Application method), 87

reset() (prompt\_toolkit.buffer.Buffer method), 96

reset() (prompt\_toolkit.key\_binding.vi\_state.ViState method), 154

reset() (prompt\_toolkit.layout.Container method), 128

reset\_attributes() (prompt\_toolkit.output.Output method), 161

reset\_cursor\_key\_mode() (prompt\_toolkit.output.Output method), 161

reset\_cursor\_key\_mode() (prompt\_toolkit.output.vt100.Vt100\_Output method), 163

reset\_cursor\_shape() (prompt\_toolkit.output.Output method), 161

reset\_cursor\_shape() (prompt\_toolkit.output.vt100.Vt100\_Output method), 163

reshape\_text() (in module prompt\_toolkit.buffer), 98

responds\_to\_cpr (prompt\_toolkit.output.Output attribute), 161

reverse (prompt\_toolkit.styles.Attrs attribute), 109

ReverseSearchProcessor (class in prompt\_toolkit.layout.processors), 144

rotate() (prompt\_toolkit.clipboard.Clipboard method), 99

rows (prompt\_toolkit.data\_structures.Size attribute), 165

rows\_above\_layout (prompt\_toolkit.renderer.Renderer attribute), 124

run() (prompt\_toolkit.application.Application method), 87

run\_async() (prompt\_toolkit.application.Application method), 87

run\_in\_executor\_with\_context() (in module prompt\_toolkit.eventloop), 156

run\_in\_executor\_with\_context() (in module prompt\_toolkit.eventloop.utils), 157

run\_in\_terminal() (in module prompt\_toolkit.application), 89

run\_system\_command() (prompt\_toolkit.application.Application method), 88

## S

save\_to\_undo\_stack() (prompt\_toolkit.buffer.Buffer method), 96

Screen (class in prompt\_toolkit.layout.screen), 144

scroll\_buffer\_to\_prompt() (prompt\_toolkit.output.Output method), 161

ScrollablePane (class in prompt\_toolkit.layout), 134

ScrollbarMargin (class in prompt\_toolkit.layout), 139

ScrollOffsets (class in prompt\_toolkit.layout), 134

SEARCH\_BUFFER (in module prompt\_toolkit.enums), 108

search\_state (prompt\_toolkit.layout.BufferControl attribute), 136

search\_target\_buffer\_control (prompt\_toolkit.layout.Layout attribute), 127

SearchBufferControl (class in prompt\_toolkit.layout), 136

SearchToolBar (class in prompt\_toolkit.widgets), 149

selection (prompt\_toolkit.document.Document attribute), 107

selection\_range() (prompt\_toolkit.document.Document method), 107

- selection\_range\_at\_line() (prompt\_toolkit.document.Document method), 107  
 selection\_ranges() (prompt\_toolkit.document.Document method), 107  
 SelectionState (class in prompt\_toolkit.selection), 98  
 SelectionType (class in prompt\_toolkit.selection), 98  
 send\_sigint() (prompt\_toolkit.key\_binding.key\_processor.KeyProcessor method), 155  
 set\_app() (in module prompt\_toolkit.application), 89  
 set\_attributes() (prompt\_toolkit.output.Output method), 161  
 set\_attributes() (prompt\_toolkit.output.vt100.Vt100\_Output method), 163  
 set\_cursor\_position() (prompt\_toolkit.layout.screen.Screen method), 145  
 set\_cursor\_shape() (prompt\_toolkit.output.Output method), 161  
 set\_data() (prompt\_toolkit.clipboard.Clipboard method), 99  
 set\_document() (prompt\_toolkit.buffer.Buffer method), 96  
 set\_eventloop\_with\_inpuhook() (in module prompt\_toolkit.eventloop.inpuhook), 156  
 set\_menu\_position() (prompt\_toolkit.layout.screen.Screen method), 145  
 set\_text() (prompt\_toolkit.clipboard.Clipboard method), 99  
 set\_title() (in module prompt\_toolkit.shortcuts), 118  
 set\_title() (prompt\_toolkit.output.Output method), 161  
 set\_title() (prompt\_toolkit.output.vt100.Vt100\_Output method), 163  
 Shadow (class in prompt\_toolkit.widgets), 148  
 show\_cursor (prompt\_toolkit.layout.screen.Screen attribute), 145  
 show\_cursor() (prompt\_toolkit.output.Output method), 162  
 ShowArg (class in prompt\_toolkit.layout.processors), 142  
 ShowLeadingWhiteSpaceProcessor (class in prompt\_toolkit.layout.processors), 143  
 ShowTrailingWhiteSpaceProcessor (class in prompt\_toolkit.layout.processors), 143  
 SimpleLexer (class in prompt\_toolkit.lexers), 124  
 Size (class in prompt\_toolkit.data\_structures), 165  
 SpinningWheel (class in prompt\_toolkit.shortcuts.progress\_bar.formatters), 120  
 split\_lines() (in module prompt\_toolkit.formatted\_text), 92  
 start\_completion() (prompt\_toolkit.buffer.Buffer method), 96  
 start\_history\_lines\_completion() (prompt\_toolkit.buffer.Buffer method), 96  
 start\_of\_paragraph() (prompt\_toolkit.document.Document method), 107  
 start\_of\_paragraph() (prompt\_toolkit.buffer.Buffer method), 96  
 StdoutProxy (class in prompt\_toolkit.patch\_stdout), 166  
 store\_string() (prompt\_toolkit.history.History method), 109  
 strike (prompt\_toolkit.styles.Attrs attribute), 110  
 Style (class in prompt\_toolkit.styles), 110  
 style\_from\_pygments\_cls() (in module prompt\_toolkit.styles), 111  
 style\_from\_pygments\_dict() (in module prompt\_toolkit.styles), 111  
 style\_rules (prompt\_toolkit.styles.BaseStyle attribute), 110  
 StyleTransformation (class in prompt\_toolkit.styles), 111  
 Suggestion (class in prompt\_toolkit.auto\_suggest), 122  
 suspend\_to\_background() (prompt\_toolkit.application.Application method), 88  
 swap\_characters\_before\_cursor() (prompt\_toolkit.buffer.Buffer method), 96  
 SwapLightAndDarkStyleTransformation (class in prompt\_toolkit.styles), 111  
 SyncFromStart (class in prompt\_toolkit.lexers), 125  
 SyntaxSync (class in prompt\_toolkit.lexers), 125  
 SYSTEM\_BUFFER (in module prompt\_toolkit.enums), 108  
 SystemToolBar (class in prompt\_toolkit.widgets), 149
- ## T
- TabsProcessor (class in prompt\_toolkit.layout.processors), 143  
 Template (class in prompt\_toolkit.formatted\_text), 90  
 Text (class in prompt\_toolkit.shortcuts.progress\_bar.formatters), 120  
 text (prompt\_toolkit.document.Document attribute), 107  
 text (prompt\_toolkit.widgets.TextArea attribute), 147  
 text\_inserted (prompt\_toolkit.completion.CompleteEvent attribute), 101  
 TextArea (class in prompt\_toolkit.widgets), 145  
 ThreadedAutoSuggest (class in prompt\_toolkit.auto\_suggest), 122

- ThreadedCompleter (class in *prompt\_toolkit.completion*), 100
- ThreadedHistory (class in *prompt\_toolkit.history*), 108
- ThreadedValidator (class in *prompt\_toolkit.validation*), 122
- tilde\_operator (*prompt\_toolkit.key\_binding.vi\_state.ViState* attribute), 154
- TimeElapsed (class in *prompt\_toolkit.shortcuts.progress\_bar.formatters*), 120
- TimeLeft (class in *prompt\_toolkit.shortcuts.progress\_bar.formatters*), 120
- timeoutlen (*prompt\_toolkit.application.Application* attribute), 88
- to\_container (class in *prompt\_toolkit.layout*), 135
- to\_filter() (in module *prompt\_toolkit.filters*), 150
- to\_filter() (in module *prompt\_toolkit.filters.utils*), 151
- to\_formatted\_text() (in module *prompt\_toolkit.formatted\_text*), 90
- to\_plain\_text() (in module *prompt\_toolkit.formatted\_text*), 92
- to\_window (class in *prompt\_toolkit.layout*), 135
- top\_visible (*prompt\_toolkit.layout.WindowRenderInfo* attribute), 165
- transform\_attrs() (*prompt\_toolkit.styles.StyleTransformation* method), 111
- transform\_attrs() (*prompt\_toolkit.styles.SwapLightAndDarkStyleTransformation* method), 111
- transform\_current\_line() (*prompt\_toolkit.buffer.Buffer* method), 96
- transform\_lines() (*prompt\_toolkit.buffer.Buffer* method), 96
- transform\_region() (*prompt\_toolkit.buffer.Buffer* method), 97
- Transformation (class in *prompt\_toolkit.layout.processors*), 141
- TransformationInput (class in *prompt\_toolkit.layout.processors*), 140
- translate\_index\_to\_position() (*prompt\_toolkit.document.Document* method), 107
- translate\_row\_col\_to\_index() (*prompt\_toolkit.document.Document* method), 108
- ttimeoutlen (*prompt\_toolkit.application.Application* attribute), 88
- typeahead\_hash() (*prompt\_toolkit.input.Input* method), 158
- UIContent (class in *prompt\_toolkit.layout*), 137
- UIControl (class in *prompt\_toolkit.layout*), 137
- underline (*prompt\_toolkit.styles.Attrs* attribute), 109
- unindent() (in module *prompt\_toolkit.buffer*), 98
- update\_parents\_relations() (*prompt\_toolkit.layout.Layout* method), 127
- validate() (*prompt\_toolkit.buffer.Buffer* method), 97
- validate() (*prompt\_toolkit.validation.Validator* method), 121
- validate\_and\_handle() (*prompt\_toolkit.buffer.Buffer* method), 97
- validate\_async() (*prompt\_toolkit.validation.ThreadedValidator* method), 122
- validate\_async() (*prompt\_toolkit.validation.Validator* method), 122
- ValidationError, 121
- Validator (class in *prompt\_toolkit.validation*), 121
- vertical\_scroll\_percentage (*prompt\_toolkit.layout.WindowRenderInfo* attribute), 165
- VerticalAlign (class in *prompt\_toolkit.layout*), 135
- VerticalLine (class in *prompt\_toolkit.widgets*), 148
- vi\_state (*prompt\_toolkit.application.Application* attribute), 88
- ViState (class in *prompt\_toolkit.key\_binding.vi\_state*), 154
- VSplit (class in *prompt\_toolkit.layout*), 129
- Vt100Output (class in *prompt\_toolkit.output.vt100*), 162
- Vt100Input (class in *prompt\_toolkit.input.vt100*), 158
- Vt100Parser (class in *prompt\_toolkit.input.vt100\_parser*), 159
- wait\_for\_cpr\_responses() (*prompt\_toolkit.renderer.Renderer* method), 124
- waiting\_for\_cpr (*prompt\_toolkit.renderer.Renderer* attribute), 124
- waiting\_for\_digraph (*prompt\_toolkit.key\_binding.vi\_state.ViState* attribute), 154
- walk (class in *prompt\_toolkit.layout*), 128
- walk() (*prompt\_toolkit.layout.Layout* method), 127
- walk\_through\_modal\_area() (*prompt\_toolkit.layout.Layout* method), 128
- width (*prompt\_toolkit.layout.screen.Screen* attribute), 145
- Window (class in *prompt\_toolkit.layout*), 131
- WindowAlign (class in *prompt\_toolkit.layout*), 133

WindowRenderInfo (class in *prompt\_toolkit.layout*),  
164

WordCompleter (class in *prompt\_toolkit.completion*),  
103

write() (*prompt\_toolkit.output.Output* method), 162

write() (*prompt\_toolkit.output.vt100.Vt100\_Output*  
method), 163

write\_raw() (*prompt\_toolkit.output.Output* method),  
162

write\_raw() (*prompt\_toolkit.output.vt100.Vt100\_Output*  
method), 163

write\_to\_screen()  
(*prompt\_toolkit.layout.Container* method),  
128

write\_to\_screen() (*prompt\_toolkit.layout.HSplit*  
method), 129

write\_to\_screen()  
(*prompt\_toolkit.layout.ScrollablePane*  
method), 134

write\_to\_screen() (*prompt\_toolkit.layout.VSplit*  
method), 130

write\_to\_screen() (*prompt\_toolkit.layout.Window*  
method), 133

## X

x (*prompt\_toolkit.data\_structures.Point* attribute), 165

## Y

y (*prompt\_toolkit.data\_structures.Point* attribute), 165

yank\_last\_arg() (*prompt\_toolkit.buffer.Buffer*  
method), 97

yank\_nth\_arg() (*prompt\_toolkit.buffer.Buffer*  
method), 97

yes\_no\_dialog() (in module  
*prompt\_toolkit.shortcuts*), 119

## Z

zero() (*prompt\_toolkit.layout.Dimension* class  
method), 139

zero\_width\_escapes  
(*prompt\_toolkit.layout.screen.Screen* attribute),  
145